A CORRELATION OF THE ENGINEERING CHARACTERISTICS OF ORGANIC SOILS IN NEW YORK STATE

(PRELIMINARY)

BY
L. H. MOORE
ASSOCIATE SOILS ENGINEER

BUREAU OF SOIL MECHANICS
JANUARY 1962

A CORRELATION OF THE ENGINEERING CHARACTERISTICS OF ORGANIC SOILS IN NEW YORK STATE

PRELIMINARY

BY: LYNDON H. MOORE
ASSOCIATE SOILS ENGINEER

BUREAU OF SOIL MECHANICS
NEW YORK STATE DEPARTMENT OF PUBLIC WORKS

JANUARY 1962

NYSDOT
Library
50 Wolf Road, POD 34
Albany, New York 12232

A CORRELATION OF THE ENGINEERING CHARACTERISTICS OF ORGANIC SOILS IN NEW YORK STATE

PRELIMINARY

BY: LYNDON H. MOORE
ASSOCIATE SOILS ENGINEER

BUREAU OF SOIL MECHANICS
NEW YORK STATE DEPARTMENT OF PUBLIC WORKS

JANUARY 1962

ITEDOT
Library
50 Wolf Road, POD 34
Albany, New York 12232

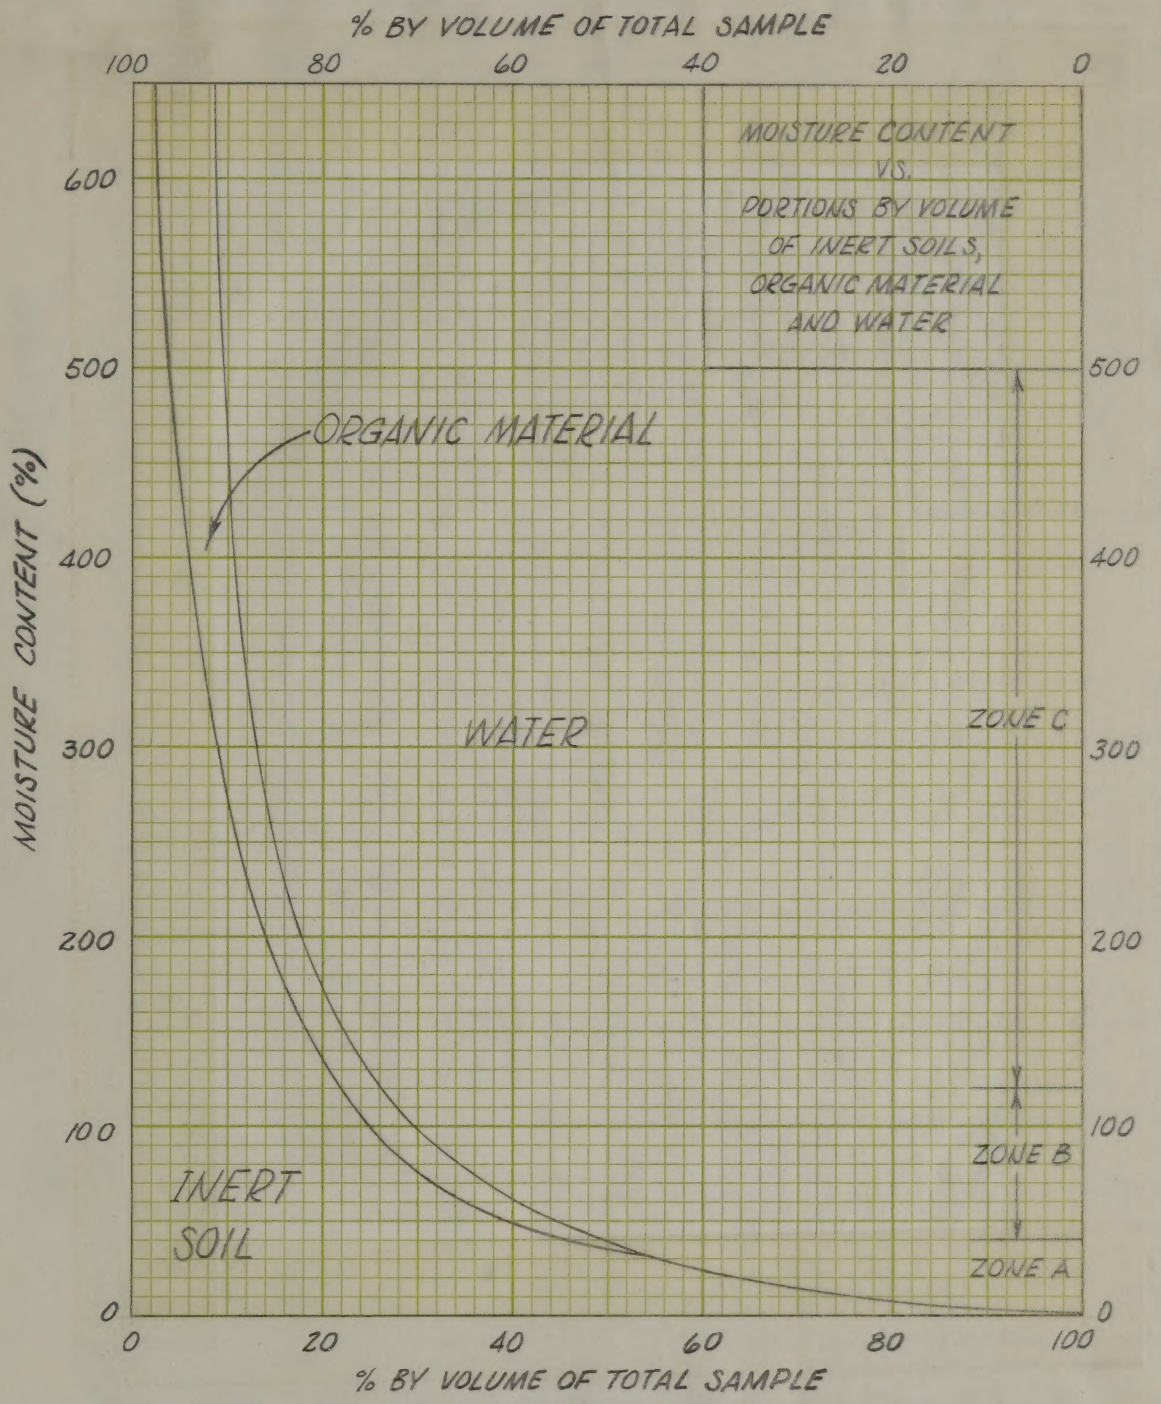

Example showing use of chart:

At Moisture Content of 200% a saturated soil contains by volume 14% inert soil, 4% organic material and 82% water.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 1
CORRELATION OF ENGINEERING CHARACTERISTICS OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM/606A

MOISTURE CONTENT
VS.
PORTIONS BY VOLUME
OF INERT SOILS,
ORGANIC MATERIAL
AND WATER

Example showing use of chart:

At Moisture Content of 200%
a saturated soil contains by
volume 14% inert soil, 4% or-
ganic material and 82% water.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 1
CORRELATION OF ENGINEERING
CHARACTERISTICS OF
ORGANIC SOILS

APPROVED	DISTRICT NO.
PRINCIPAL SOILS ENGINEER	COUNTY
	DWG. NO SM1606A

PRELIMINARY CHART FOR ESTIMATING SHEARING STRENGTHS OF SWAMP SOILS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

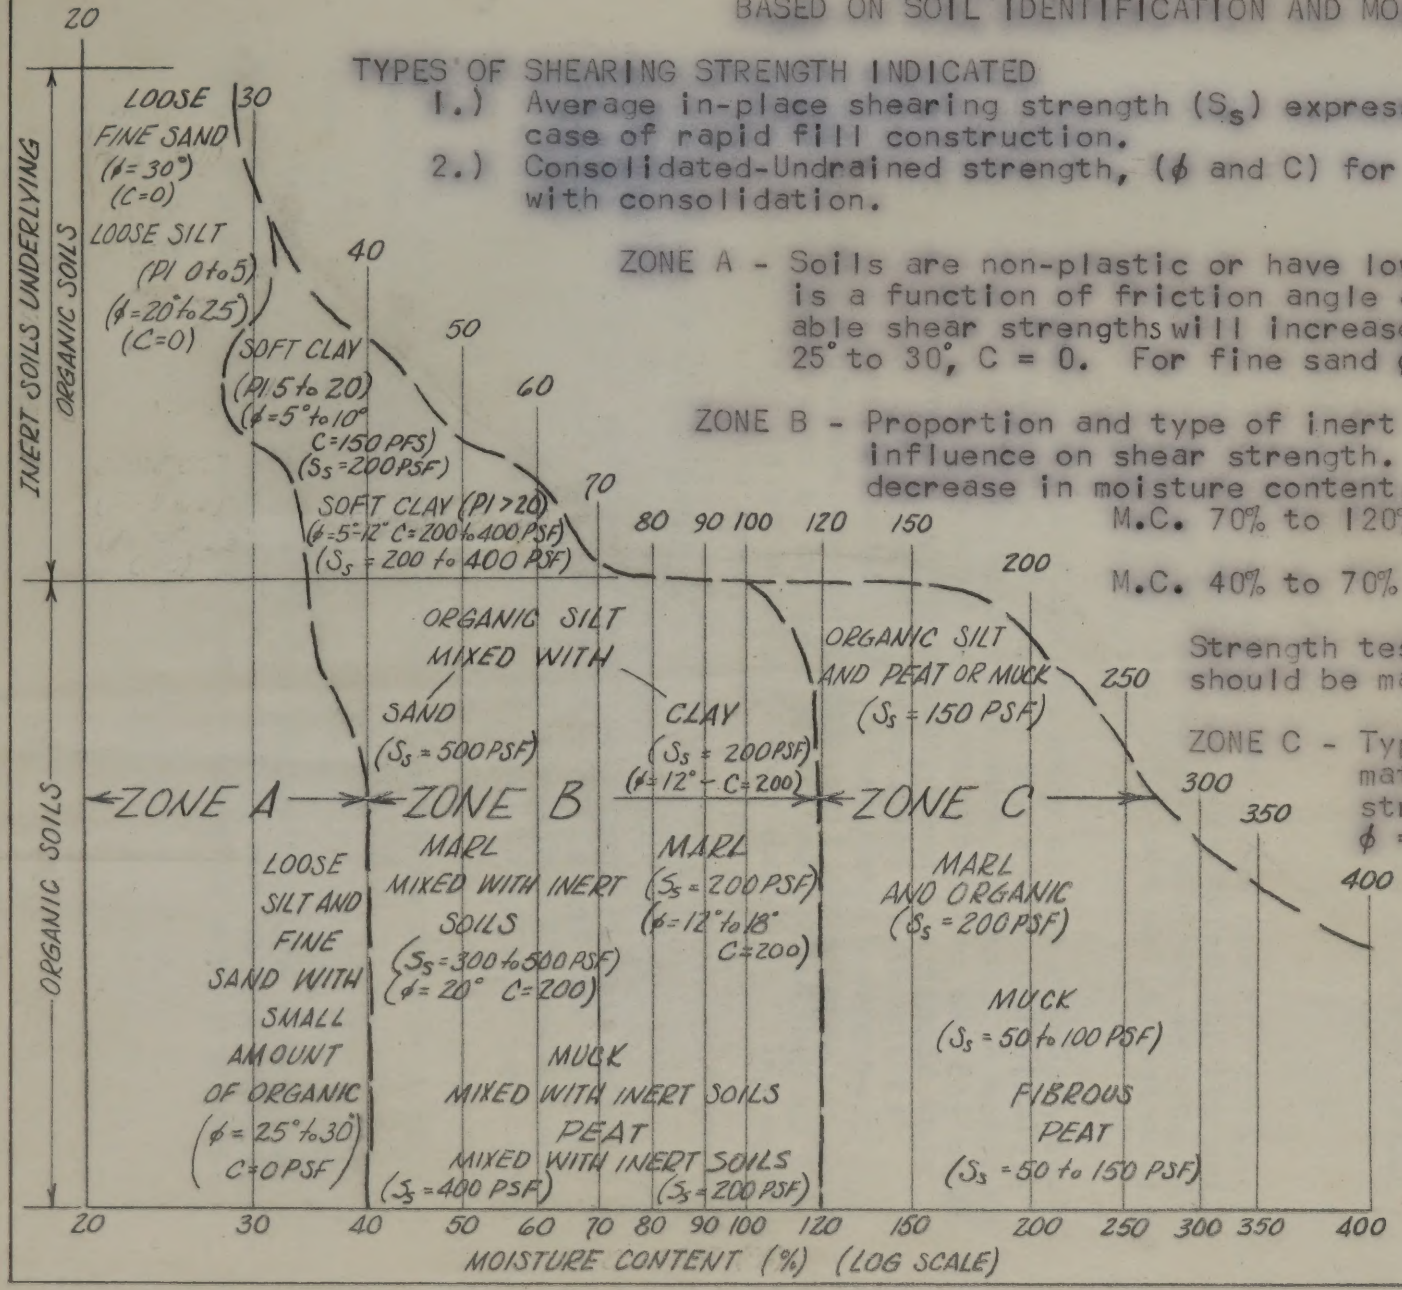

TYPES OF SHEARING STRENGTH INDICATED

1.) Average in-place shearing strength (S_s) expressed in lbs. per sq. ft. for case of rapid fill construction.

2.) Consolidated-Undrained strength, (ϕ and C) for estimating strength increase with consolidation.

ZONE A - Soils are non-plastic or have low plasticity, shear strength is a function of friction angle and overburden load. Available shear strengths will increase with loading. For silt ϕ = 25° to 30°, C = 0. For fine sand ϕ = 30° to 35°, C = 0.

ZONE B - Proportion and type of inert soil will have important influence on shear strength. Strength will increase with decrease in moisture content.

M.C. 70% to 120% - S_s = 300 to 200 psf, ϕ = 12° to 15°, C = 200 psf

M.C. 40% to 70% - S_s = 600 to 300 psf, ϕ = 15° to 20°, C = 200 to 400psf

Strength tests on undisturbed samples should be made when possible.

ZONE C - Type and structure of organic material influence shear strength. S_s = 50 to 200 psf, ϕ = 12° to 15°, C = 50 to 100 psf

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 2

ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606B

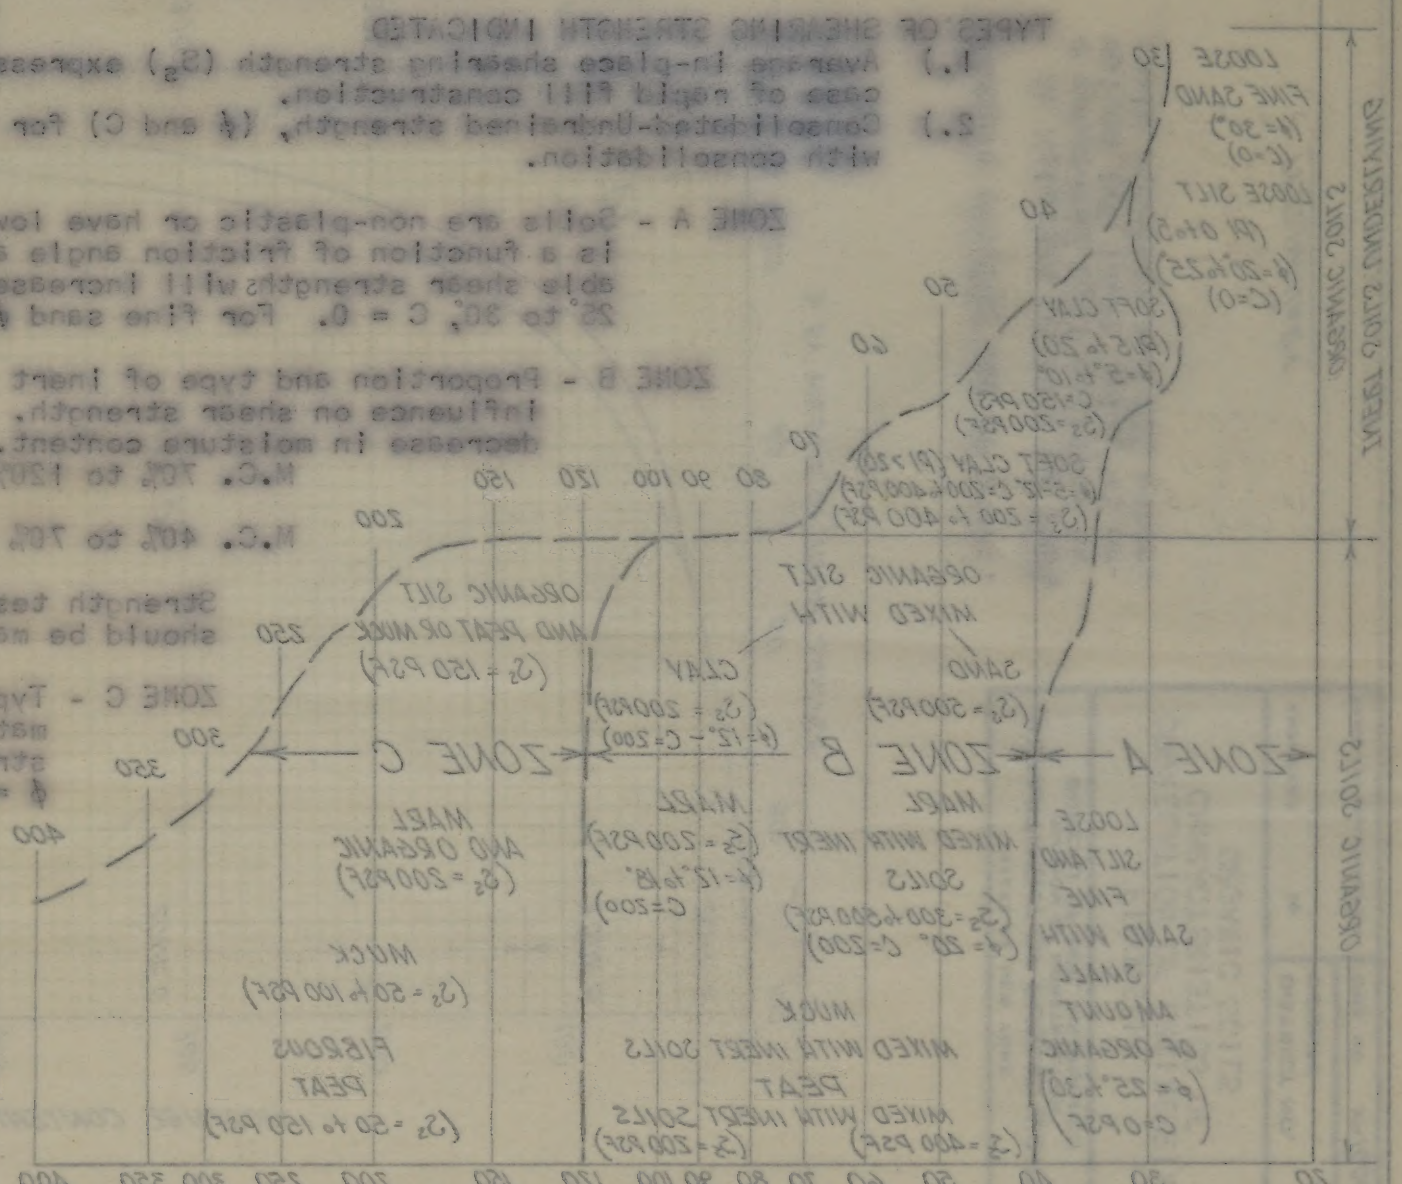

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 2

ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19 | DISTRICT NO. COUNTY

MUNICIPAL SOILS ENGINEER | DWG. NO. SM 1062-B

I. INTRODUCTION

The problem of constructing highway embankments across swamp areas is frequently encountered by the soils engineer. Modern design requirements for highway systems make it necessary to cross swamp areas that were previously avoided by older highways. In urban areas new highways are purposely located in the undeveloped swamp areas to avoid high right-of-way costs. It is the responsibility of the soils engineer to determine the most economical methods of providing a suitable foundation for highway embankments in these swamp areas.

II. CORRELATION OF LABORATORY TEST DATA

Organic soils may be placed into three general categories- (1) soils that contain almost all organic material; (2) soils that contain organic material mixed with various amounts of inert soil (sand, silt, clay) and (3) inert soils that contain small amounts of organic material.

A preliminary correlation was made of the strength and consolidation properties of organic soils with the simplest classification test available - moisture content. A moisture content correlation appeared to be feasible for the following reasons: (1) Swamp soils are usually normally loaded under light overburden loads and the correlation of structural properties with moisture content is not complicated by the effects of precompression and strong soil structure. (2) The structural properties of organic soils are influenced by the proportion of organic material to inert material. The moisture content is an indirect measure of this proportion.

III. COMPOSITION OF ORGANIC SOILS

The relative volumes of each soil constituent were determined from test data on organic soils and the results are shown on Figure 1. This chart shows how the relative volumes of water, organic material, and inert soil vary with moisture content.

The curves have been divided into three general zones described as follows:

Zone C. -

In this zone the engineering properties are determined by the water and organic material and do not change rapidly with a change in moisture content. There is a very gradual

increase in the volume of inert soil with decrease in moisture content. It should be noted that a portion of the water is likely contained within the structure of the organic particles while the remainder is "free" water in the voids. Field experience and laboratory test results confirm the above conclusions and also influenced setting the lower boundary of Zone C at 120% M.C.

Zone B.-

In this zone there is a rapid increase in the proportion of inert soil with a decrease in moisture content. (eight times the rate for Zone C). The engineering properties are determined by the type and proportion of inert soil and improve with a decrease in moisture content.

Zone A.-

Soils in this zone are fine sands and silts containing small amounts of organic. The organic material does not strongly effect the structural properties of the soil.

IV. STRENGTH PROPERTIES OF ORGANIC SOILS

The results of the correlation are presented in Figure 2. Each type of organic soils is indicated for the general range of moisture contents at which it is found in nature. Inert soils underlying organic deposits are also included as these soils are usually in a loose or soft condition and sometimes present foundation problems.

V. CONSOLIDATION PROPERTIES OF ORGANIC SOILS

The results of the correlation are presented in Figure 3. Additional data is included in the appendix for estimating settlement in organic soils based on soil identification and moisture content.

VI. ESTIMATING SUITABILITY OF ORGANIC SOILS FOR HIGHWAY EMBANKMENT FOUNDATIONS.

Figure 4 is a summary of the suitability of the various types of organic soils for highway embankment foundations based on soil identification and moisture content.

This chart has been used successfully in New York State for the following types of problems:

1. Preliminary Cost Estimate of Swamp Crossings

First the soil profile is determined by auger or retractable sampler explorations. Moisture contents tests

are conducted on representative samples. The estimated stabilization treatment is determined from Figure 4 and quantity-cost estimates submitted to the highway designer. The designer may determine if alternate alignments around the swamp will be more economical. Often other areas of the swamp are explored to seek more favorable foundation conditions.

This method of approach allows the economics of swamp crossings to be given full consideration before the design has progressed to the stage where it becomes difficult and expensive to change the line.

2. Field Determination of Lower Excavation Limit for Unsuitable Organic Material.

Excavation of unsuitable organic material is usually carried to depths to where "firm bottom" is reached by the excavating equipment. In many swamps the unsuitable organic soil is underlain by loose silts and fine sands which appear to be "unsuitable" when excavated through water (Zone A Soils). However, if these soils are left in place they will consolidate rapidly and have adequate shear strength to support embankments. Moisture content tests on auger hole samples or relatively undisturbed samples from the excavation will allow the field engineer to determine the necessary depth of excavation. The amount of money that can be saved by using this method of excavation control can be considerable. Recently a problem of this type was encountered in the construction of a major highway in the New York City area that traversed a shallow tidal marsh 1-1/2 miles in length. The upper four feet of the swamp was unsuitable organic material that had to be removed. The organic material was underlain by four feet of clayey silt that was loose and wet but would have adequate stability to support the embankment.

When the excavation operation began, the lower four feet of material was excavated because it appeared to be "unsuitable" and excavation was carried to firm bottom. An excavation control system was set up for the field engineers. All soil with a moisture content less than 40% was to be left in place. Shallow auger holes were made ahead of the excavation operation; moisture content tests were made on the samples; and the depth of excavation was established on the cross sections. The excavation operation was completed successfully without overrunning the quantity estimate.

On this contract the cost of muck excavation and granular backfill was $3.90 per cubic yard. For this long swamp the quantity of each foot of excavation in depth over the entire area was 70,000 cubic yards. Therefore each foot in depth of overexcavation would have cost $270,000. The savings in unnecessary excavation and backfill on this project is estimated to be over $500,000.

PRELIMINARY CHART FOR ESTIMATING SUITABILITY OF SWAMP SOILS FOR EMBANKMENT FOUNDATIONS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

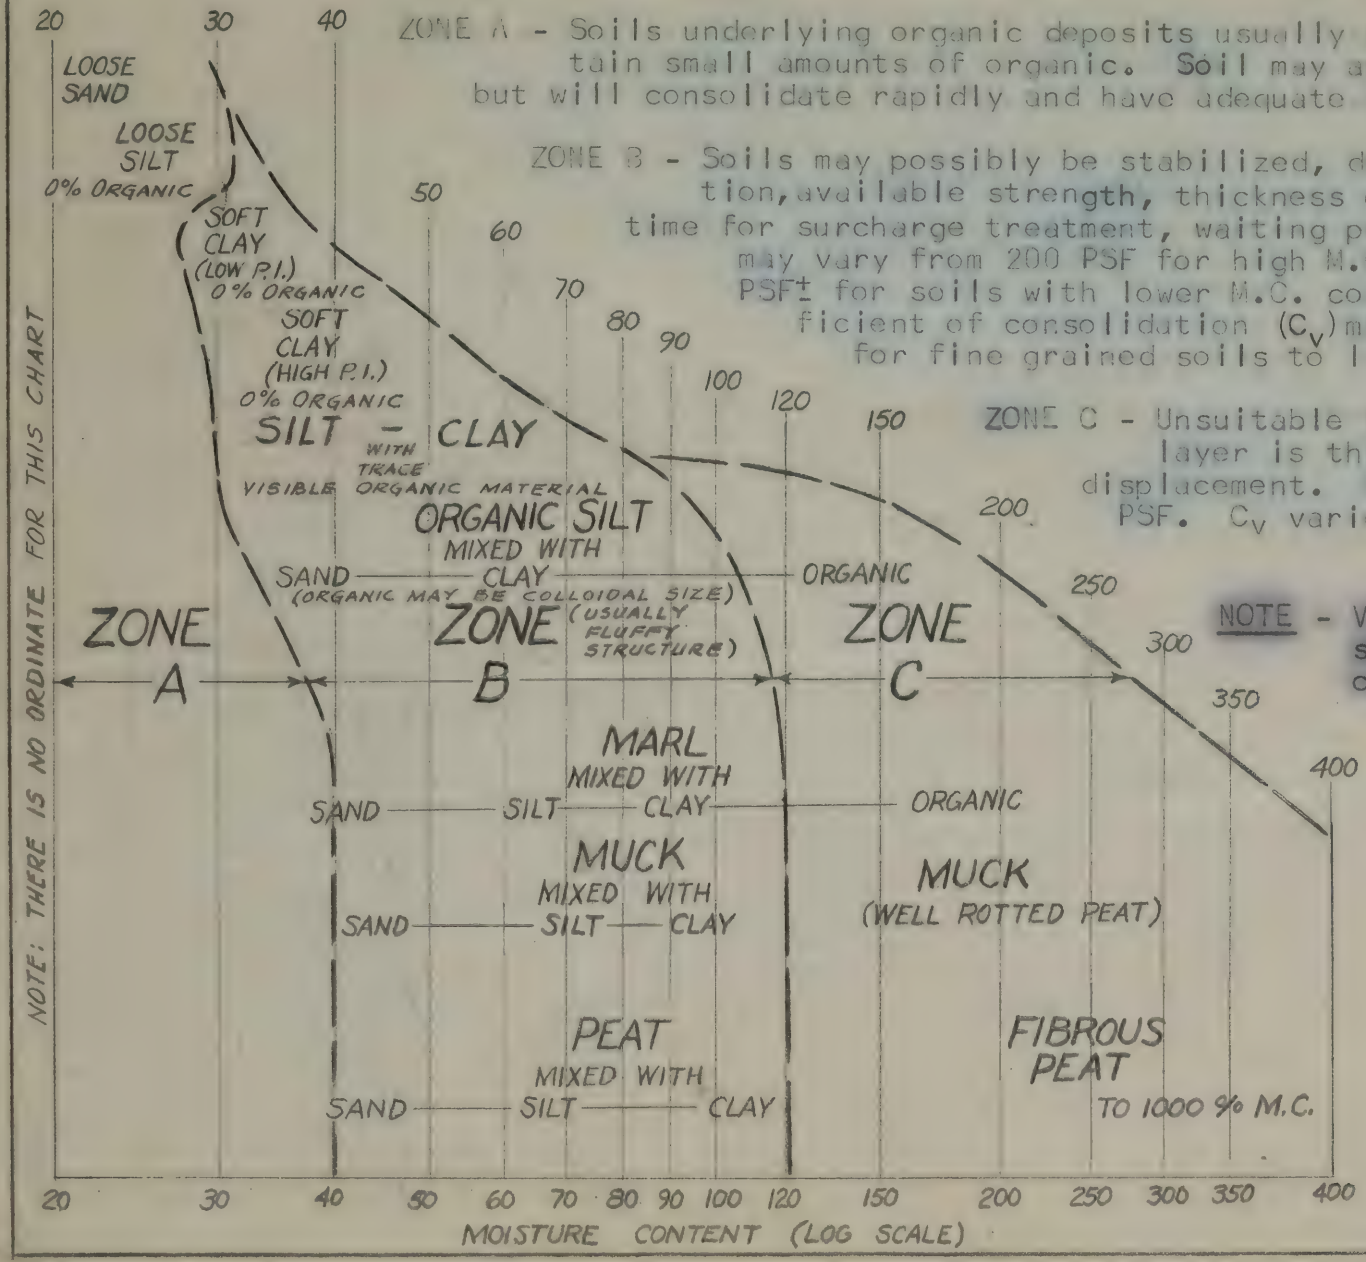

ZONE A - Soils underlying organic deposits usually are loose or soft and may contain small amounts of organic. Soil may appear unsuitable when excavated, but will consolidate rapidly and have adequate strength if left in place.

ZONE B - Soils may possibly be stabilized, depending on rate of consolidation, available strength, thickness of deposit, height of fill, time for surcharge treatment, waiting period before paving. Strength may vary from 200 PSF for high M.C. soils and soft clays to 600 PSF± for soils with lower M.C. containing sand and silt. Coefficient of consolidation (C_v) may vary from .03 ft.^{2} per day for fine grained soils to 1.0 ft.^{2} per day for coarser soils.

ZONE C - Unsuitable for highway foundation, unless layer is thin. Remove by excavation or displacement. Strength varies from 100 to 200 PSF. C_v varies from 0.1 to 2.0 ft.^{2} per day.

NOTE - Visual inspection of dried sample may be aid to identification.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 1

ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 10/31 1961	DISTRICT NO. M.O. COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606A

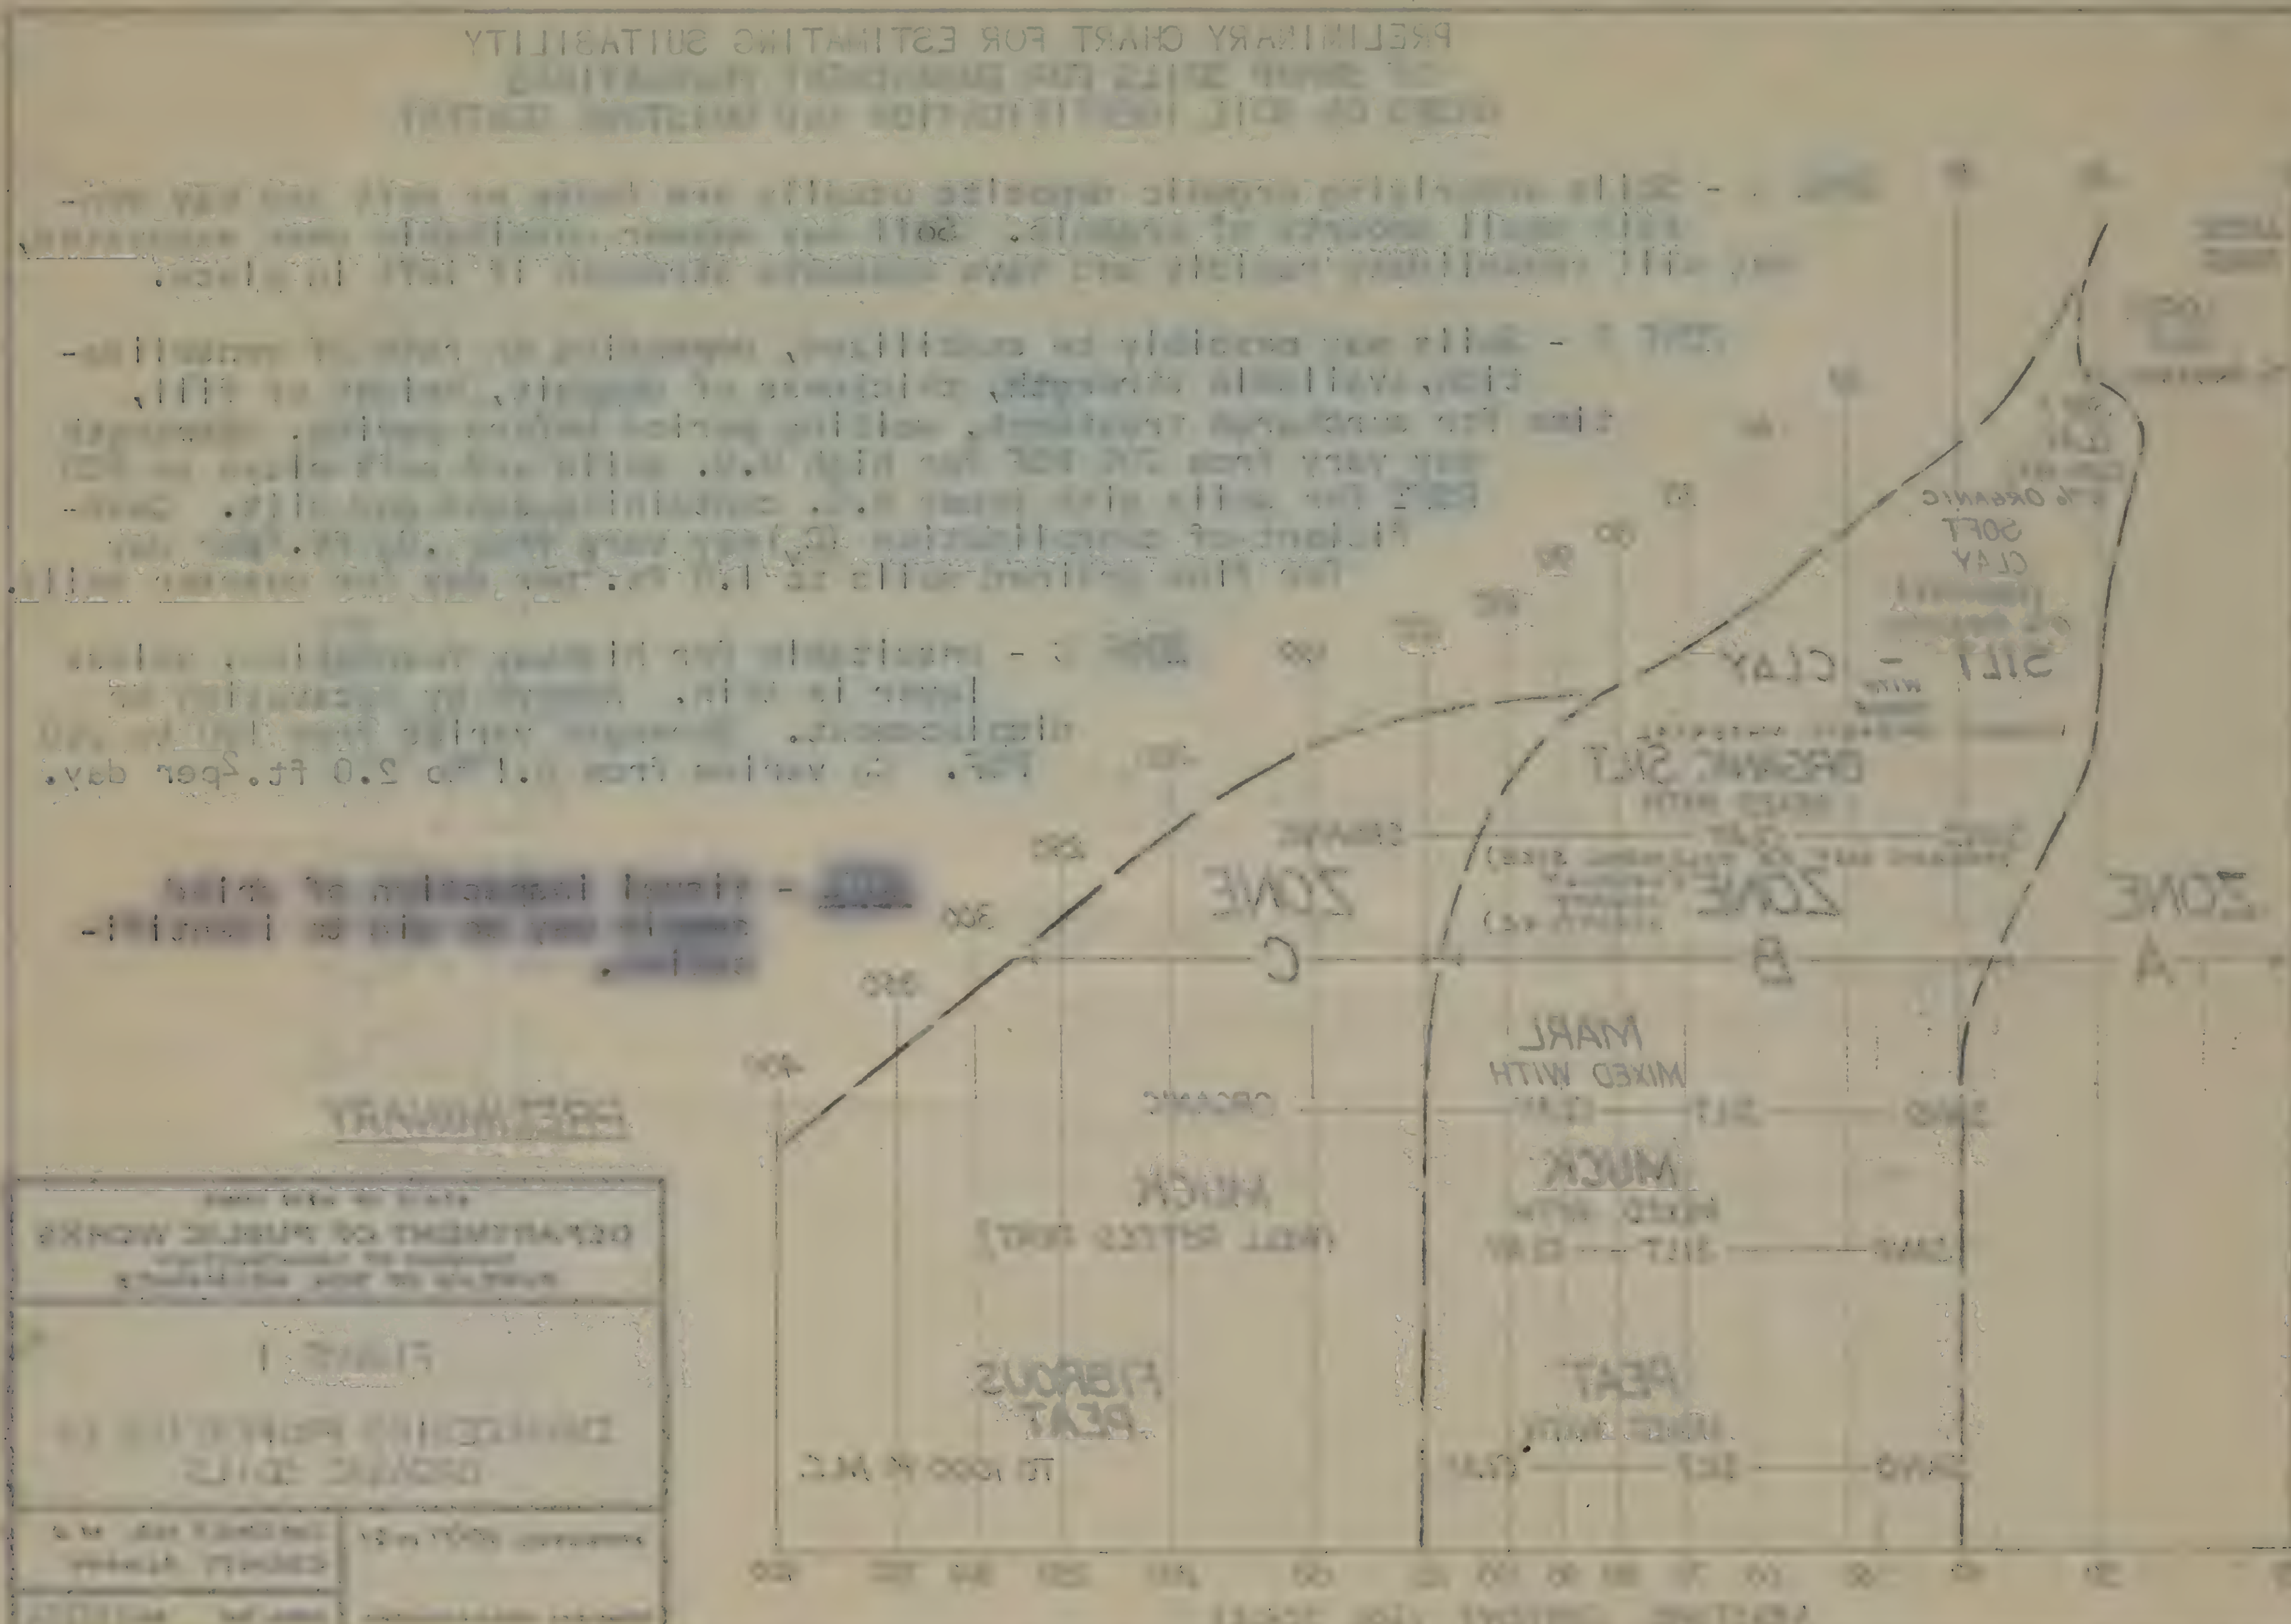
PRELIMINARY CHART FOR ESTIMATING SUITABILITY
ZONE
C
ZONE
B
ZONE
A
SILT - CLAY
SOFT
CLAY
ORGANIC SILT
MARL
MIXED WITH
ORGANIC
CLAY
SILT
SAND
MUCK
MIXED WITH
PEAT
FIBROUS
PEAT
PRELIMINARY
DEPARTMENT OF PUBLIC WORKS
FIGURE 1
ORGANIC SOILS

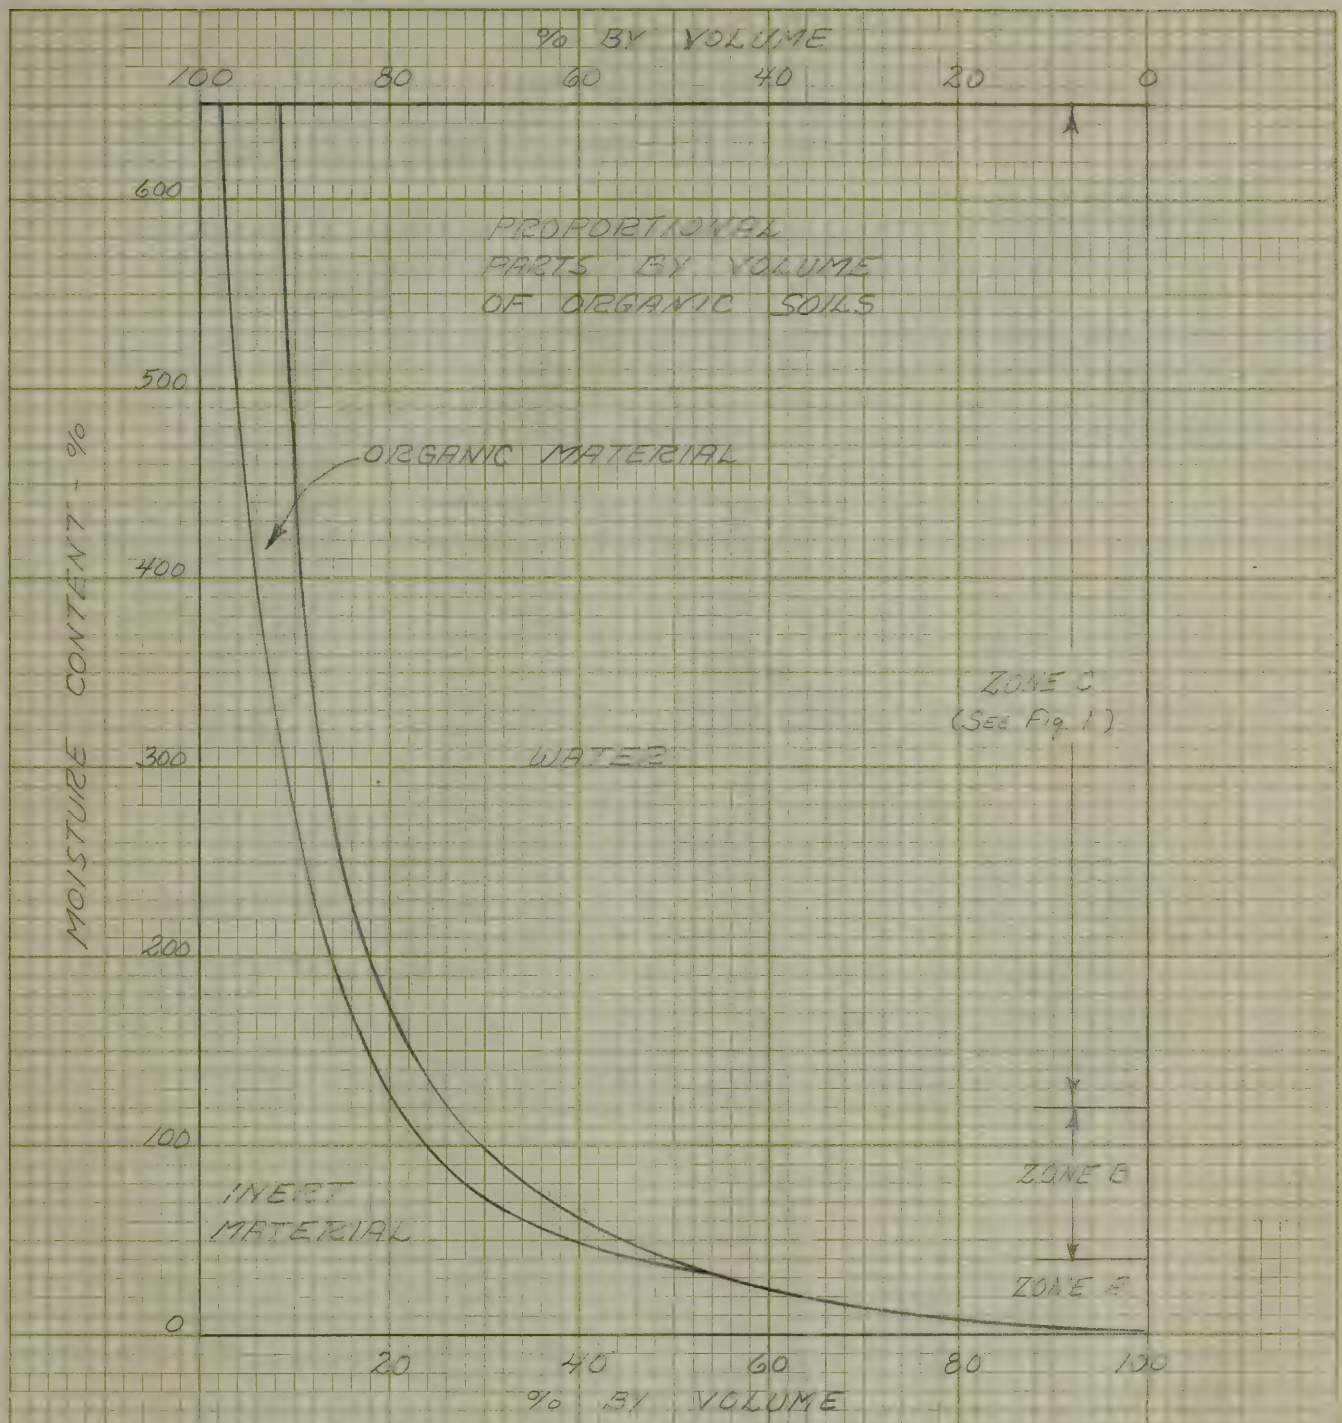

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE #2
ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 10/3/1961	DISTRICT NO. M.D.
	COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO. SM 1696 B

10 X 10 TO THE INCH 359-5DG
KEUFFEL & ESSER CO.

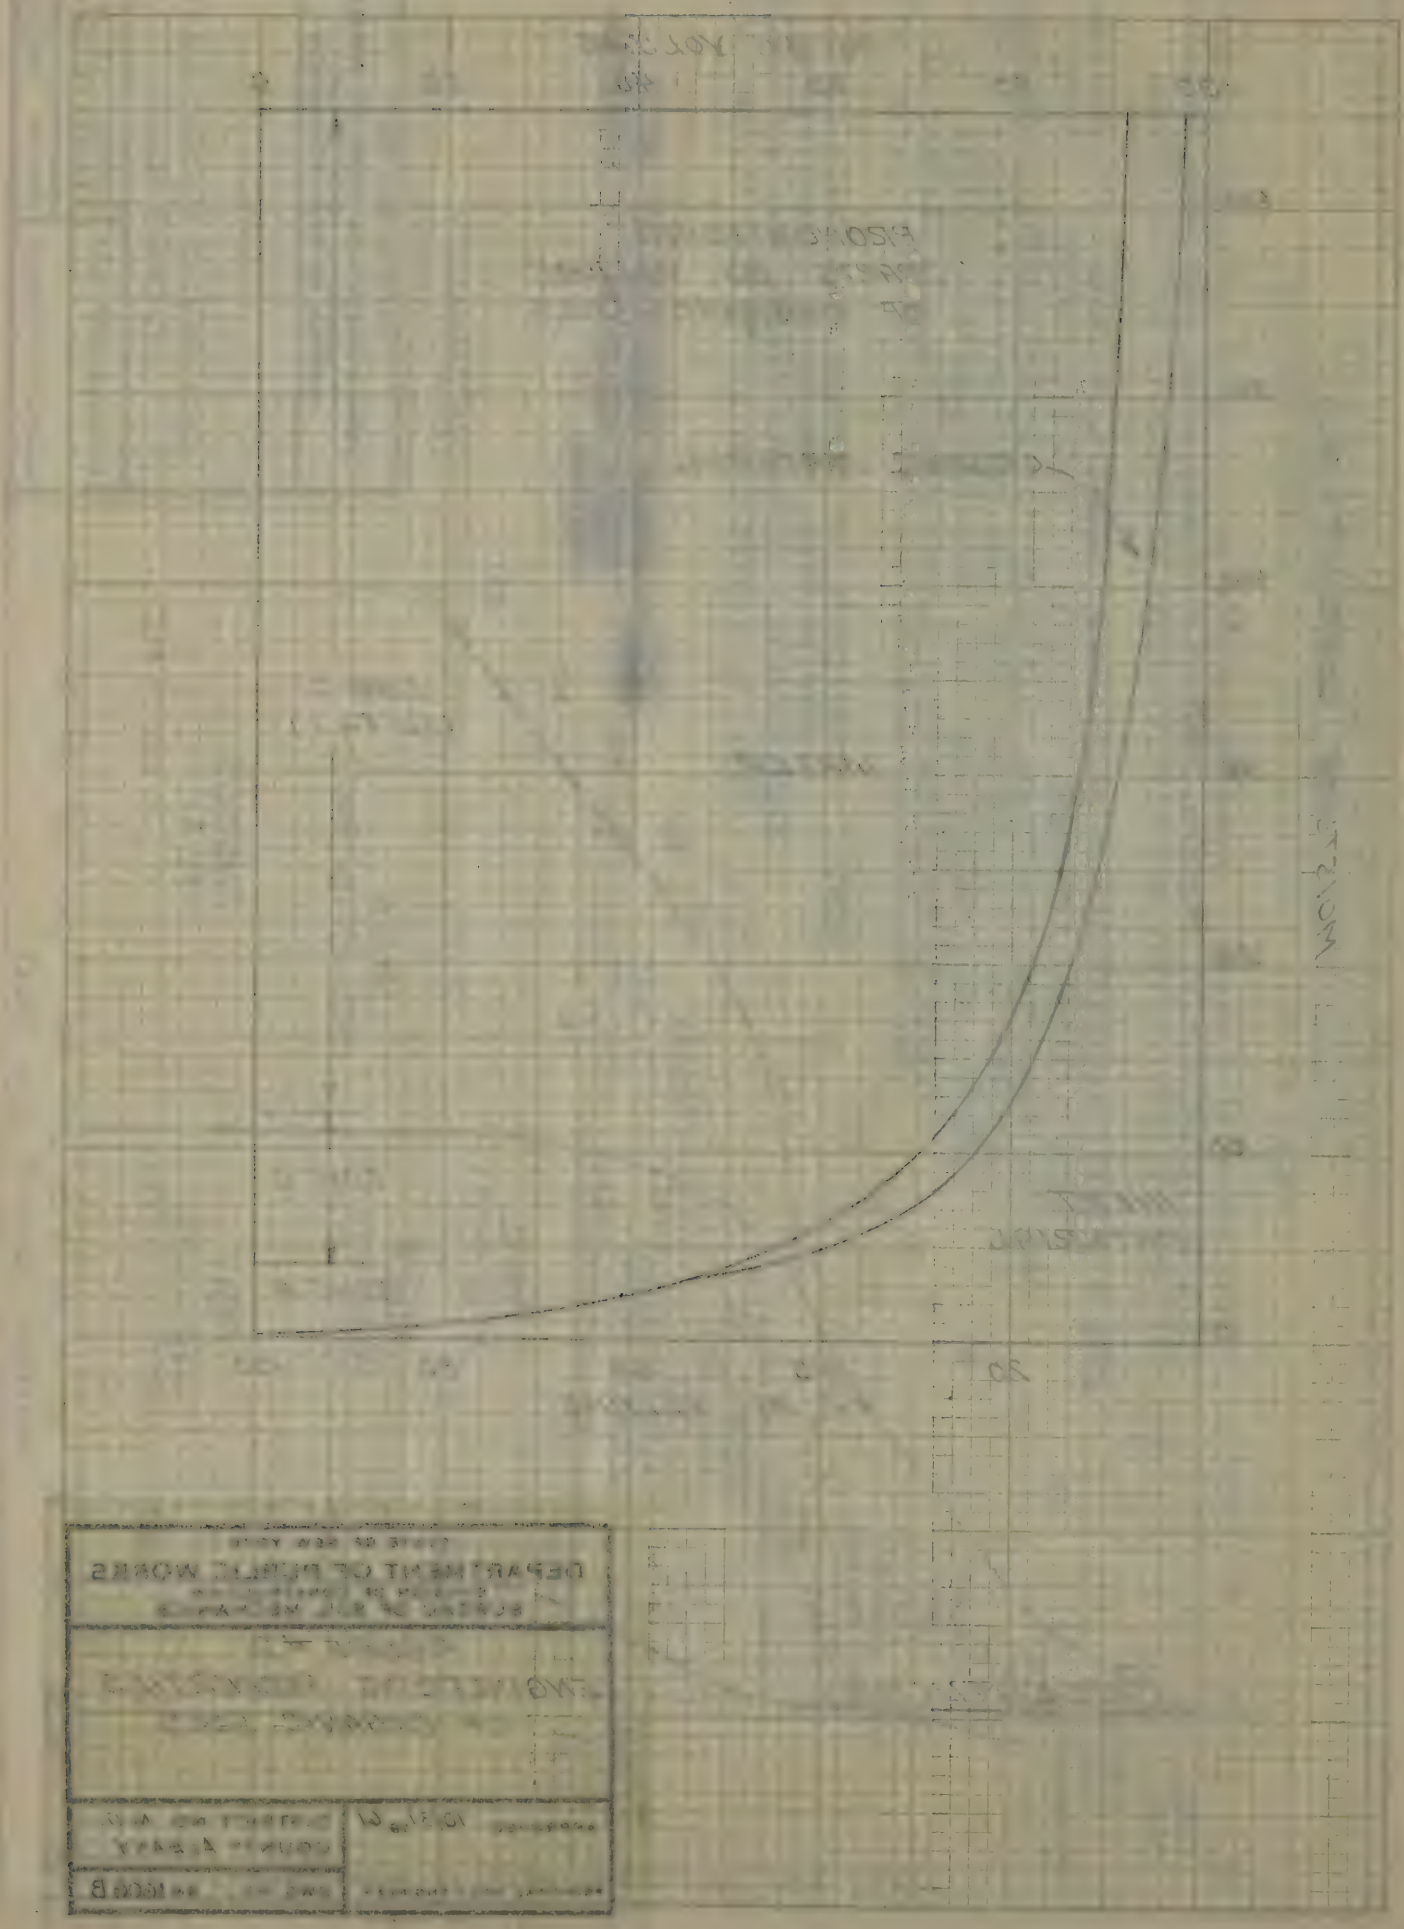

METHOD FOR ESTIMATING SETTLEMENT IN ORGANIC SOILS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

Method for Estimating Settlement

(2) Secondary Consolidation - Continued -

creasing organic content. There is considerable uncertainty and disagreement as to the best method of analyzing secondary settlement.

(a) Determine time for 90% consolidation.

(b) Fig. 6 shows secondary settlement expressed in percent of layer thickness. Enter appropriate curve at time for 90% primary consolidation and determine additional secondary consolidation. This method is an approximation.

(3) Time for Primary Consolidation

The basic equation for time-rate is

$$t_{mos} = \frac{TH^2}{C_v \quad (30.4)}$$

T = Time Factor .848 for 90% Cons.
.197 for 50% Cons.

H = Maximum drainage path distance

C_v = Coefficient of consolidation ($ft.^2/day$) - approximate values in Fig. 1. This value is very difficult to estimate

30.4 = Conversion factor to give time in months

(4) Reminder - Before going through this analysis, check stability of embankment. A settlement analysis is useless if the soil is going to be displaced.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 4
METHOD FOR ESTIMATING SETTLEMENT
ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 10/31 1961	DISTRICT NO. M.O. COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606D

(4) Reminder - Before going through this analysis, check stability

APPENDIX

METHOD FOR ESTIMATING SETTLEMENT IN ORGANIC SOILS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

A. Basis for Correlation

(1) The consolidation characteristics of organic soils are largely influenced by the amount of organic material in the soil.

(2) The physical properties and consolidation characteristics may be correlated to moisture content without excessive variations from the average.

(3) Swamp soils are usually normally loaded and correlation is not complicated by the effects of precompression.

B. Method for Estimating Settlement

(1) Primary Consolidation

Primary consolidation is the decrease in soil volume caused by the flow of pore water from the soil under an applied load.

a) The basic formula for computing primary settlement is:

$$\Delta = \frac{HC_c}{1+e} \log_{10} \frac{P_o + \Delta P}{P_o}$$

where

Δ = Total Settlement

C_c = Compression Index - see Correlation Curve 1 - Fig. 3A

e = Void Ratio - see Correlation Curve 3 - Fig. 4A

P_o = Overburden pressure determined from Correlation Curve 2 - Fig. 3A

NOTE: For soils under water table, use submerged unit weight determined from wet density (PCF) minus 62.4 PCF. Use minimum P_o of 200 PSF for peat deposits or settlements will be unrealistically large.

ΔP = Applied embankment load

(2) Secondary Consolidation

Secondary consolidation is the continuous long-time settlement that occurs in organic soils after the primary settlement is completed. It is believed to be a readjustment of the soil structure and is sometimes described as a plastic flow. The magnitude of secondary settlement increases rapidly with in-

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 1A
METHOD FOR ESTIMATING SETTLEMENT
ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606 E

SOILS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

Method for Estimating Settlement

(2) Secondary Consolidation - Continued -

creasing organic content. There is considerable uncertainty and disagreement as to the best method of analyzing secondary settlement.

(a) Determine time for 90% consolidation.

(b) Fig. 6 shows secondary settlement expressed in percent of layer thickness. Enter appropriate curve at time for 90% primary consolidation and determine additional secondary consolidation. This method is an approximation.

This method for settlement analysis suggests using primary settlement and adding the secondary settlement that occurs after completion of primary settlement. This method has proved to be reasonably accurate for Zone A and Zone B soils (W.C. up to 120%). For high organic soils (Zone C) the secondary settlement may be the major part of the total settlement and primary settlement may be minor. Considerable work is being done by others to improve the accuracy of settlement analysis of soils with high organic content.

(3) Time for Primary Consolidation

The basic equation for time-rate is

$$t_{mos} = \frac{TH^2}{C_v \quad (30.4)}$$

T = Time Factor .848 for 90% Cons.
.197 for 50% Cons.

H = Maximum drainage path distance

C_v = Coefficient of consolidation (ft.^{2}/day) - approximate values in Fig. 3. This value is very difficult to estimate

30.4 = Conversion factor to give time in months

(4) Reminder - Before going through this analysis, check stability of embankment. A settlement analysis is useless if the soil is going to be displaced.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 2A
METHOD FOR ESTIMATING SETTLEMENT
ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606F

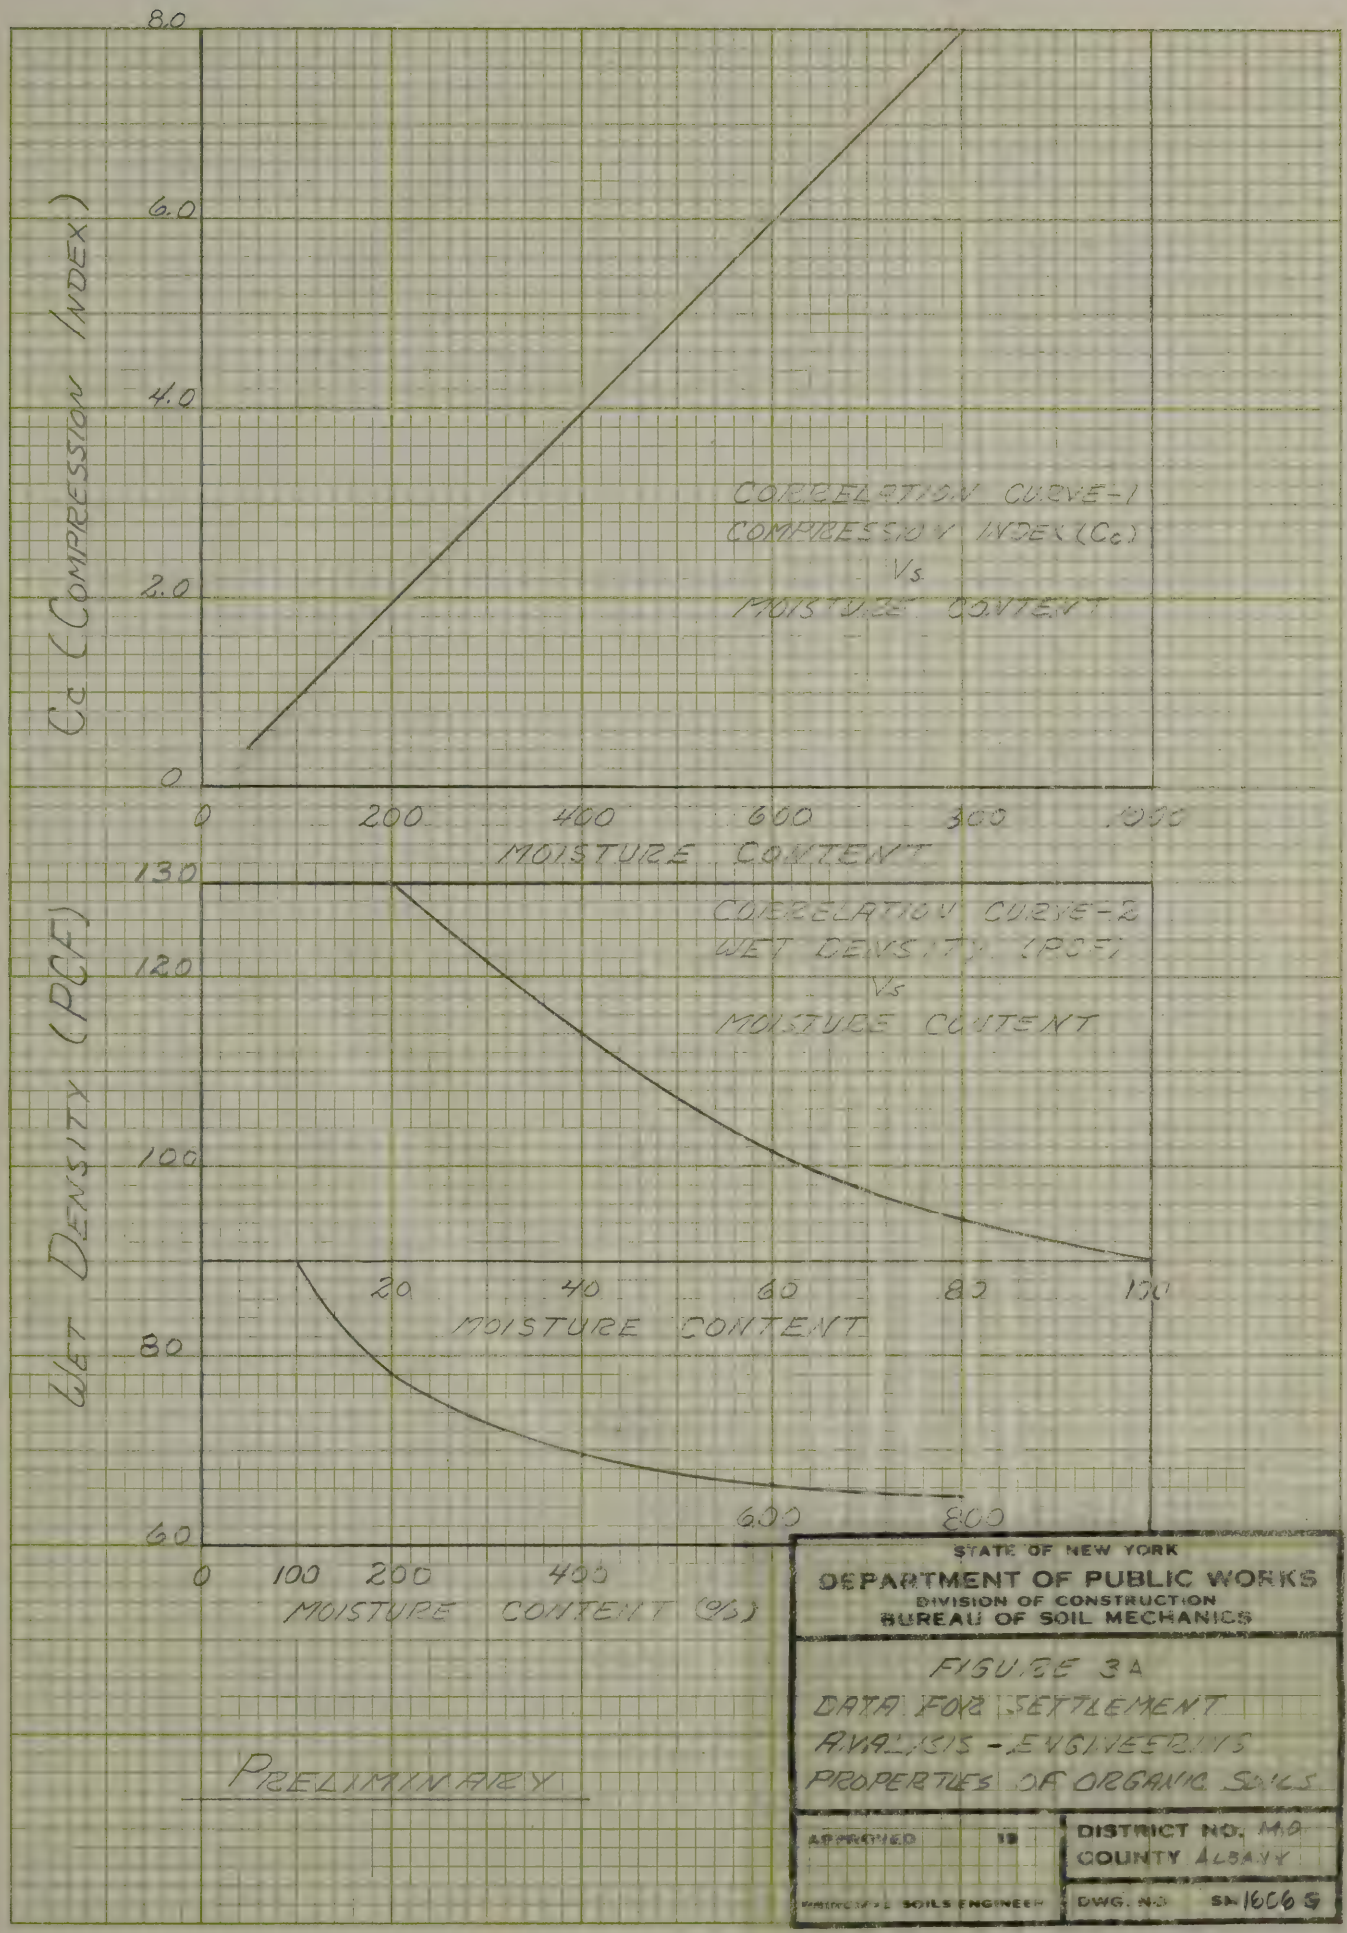

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 3A
DATA FOR SETTLEMENT ANALYSIS - ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19
PRINCIPAL SOILS ENGINEER

DISTRICT NO. 10
COUNTY ALBANY
DWG. NO SA-1606 G

K&E 10 X 10 TO THE INCH 350-5DG
KEUFFEL & ESSER CO. MADE IN U.S.A.

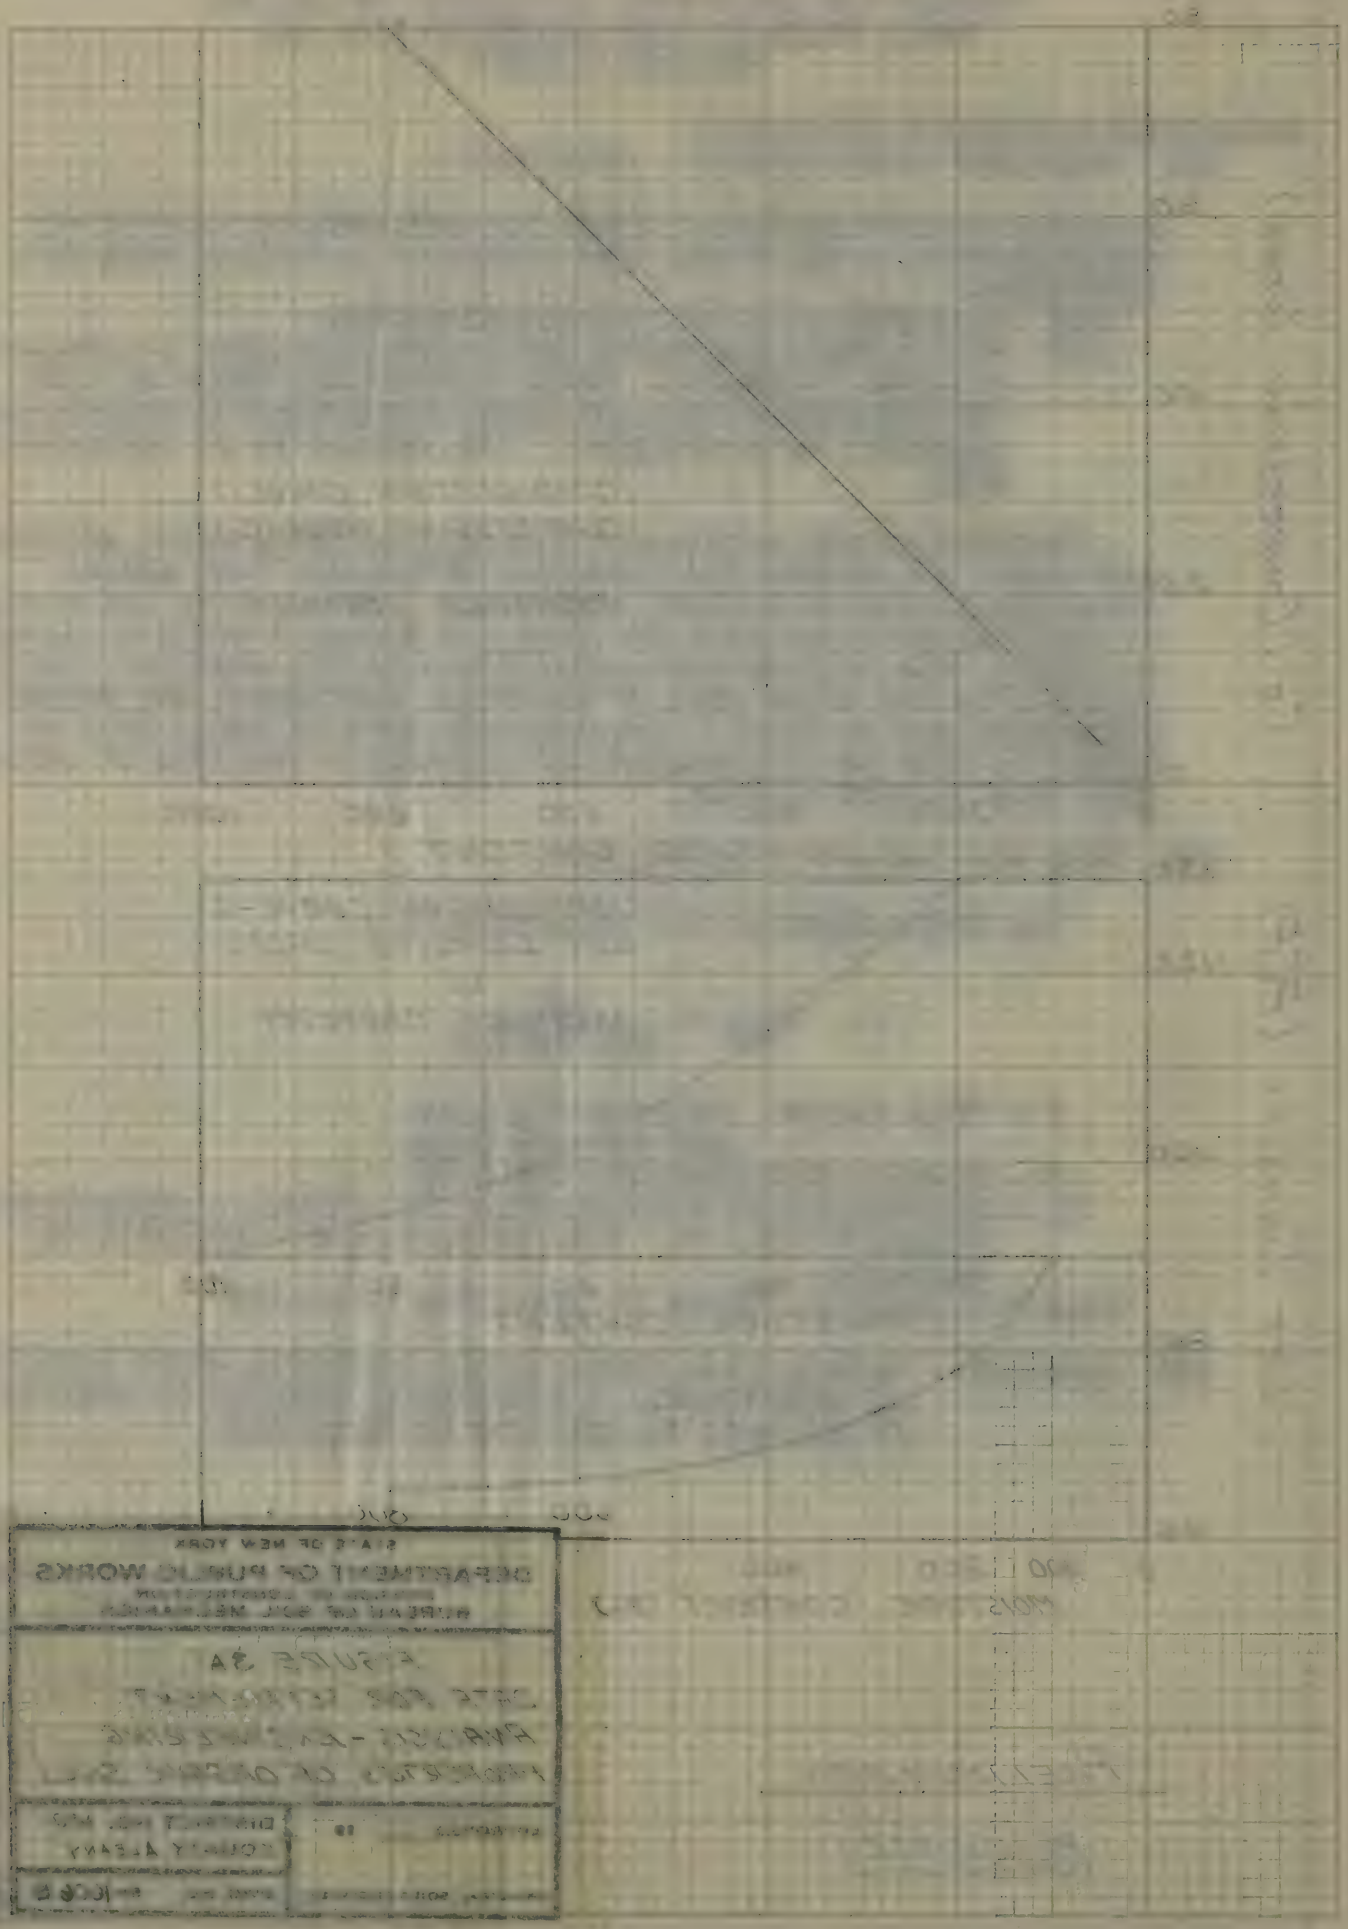

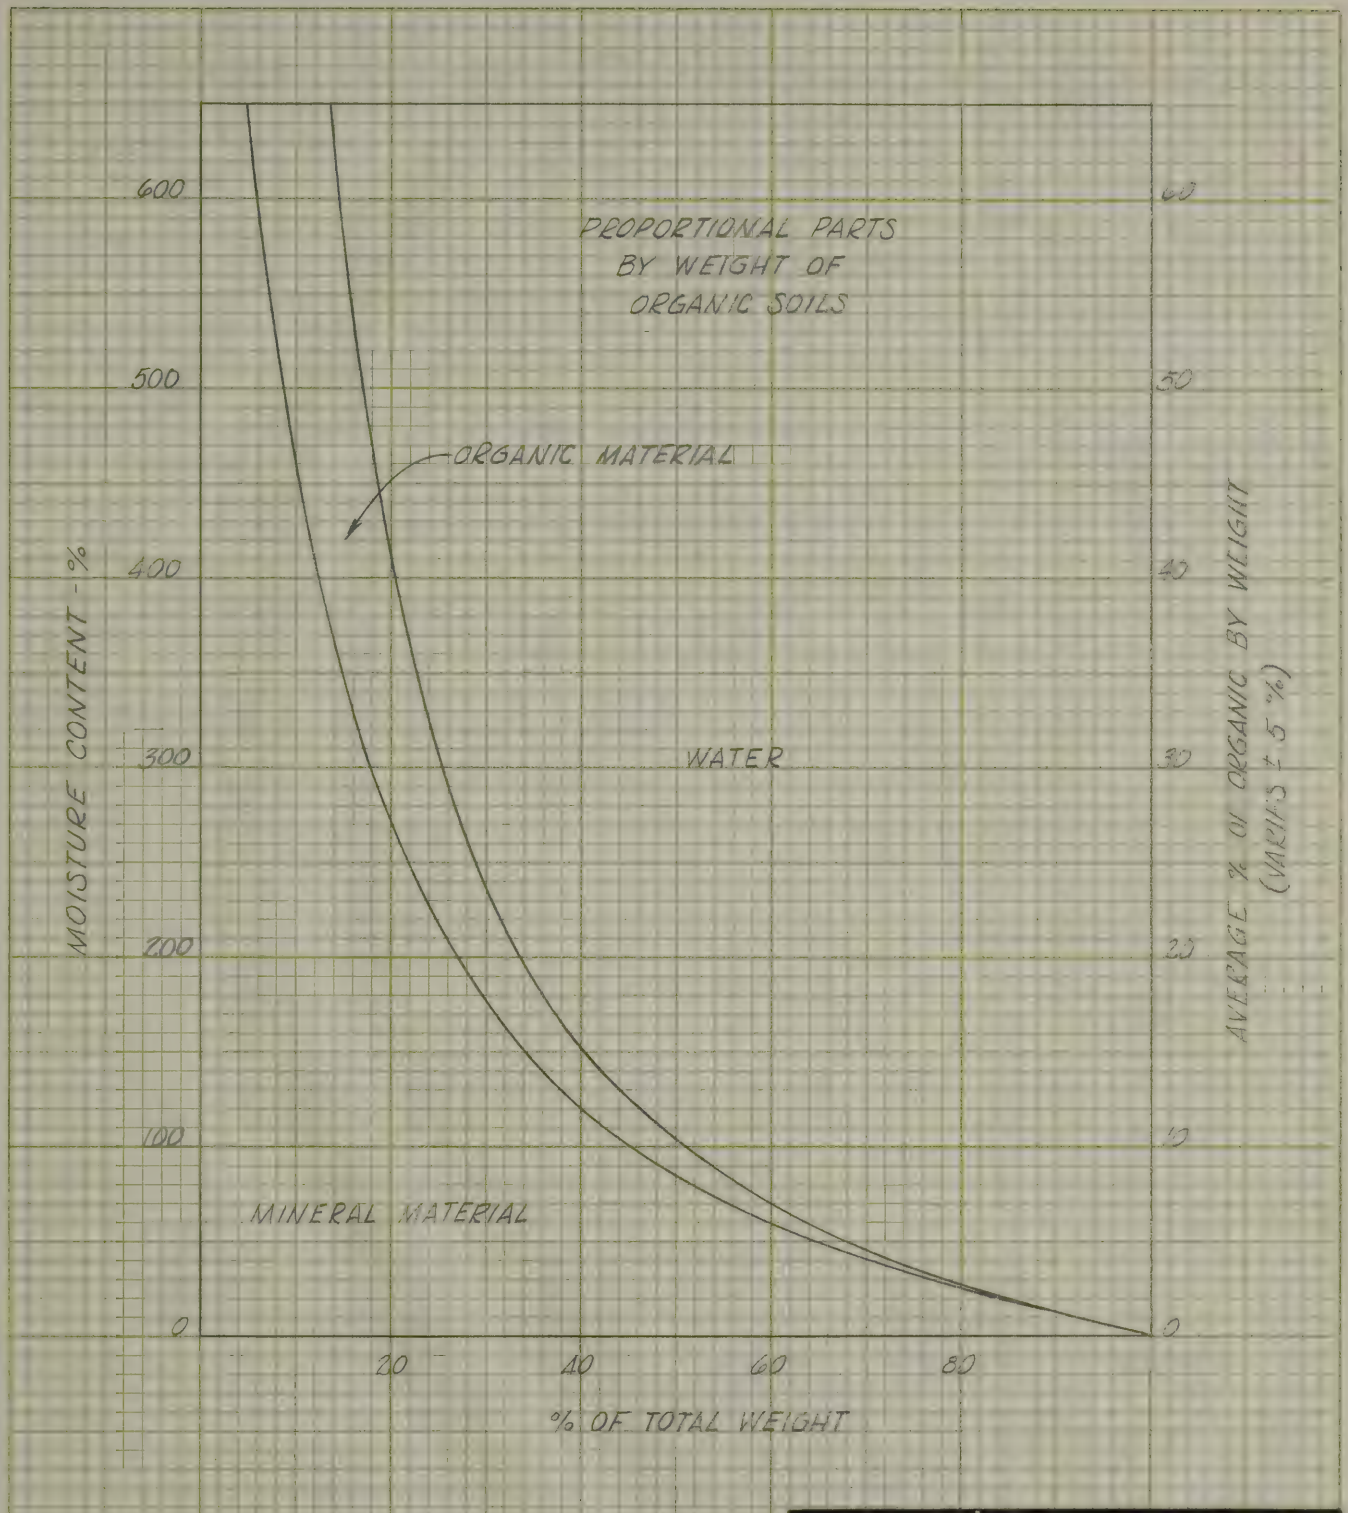

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

ENGINEERING PROPERTIES
OF ORGANIC SOILS

APPROVED 1/9/1962	DISTRICT NO. MO COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606H

10 X 10 TO THE INCH 359-309
KEUFFEL & ESSER CO. MADE IN U.S.A.

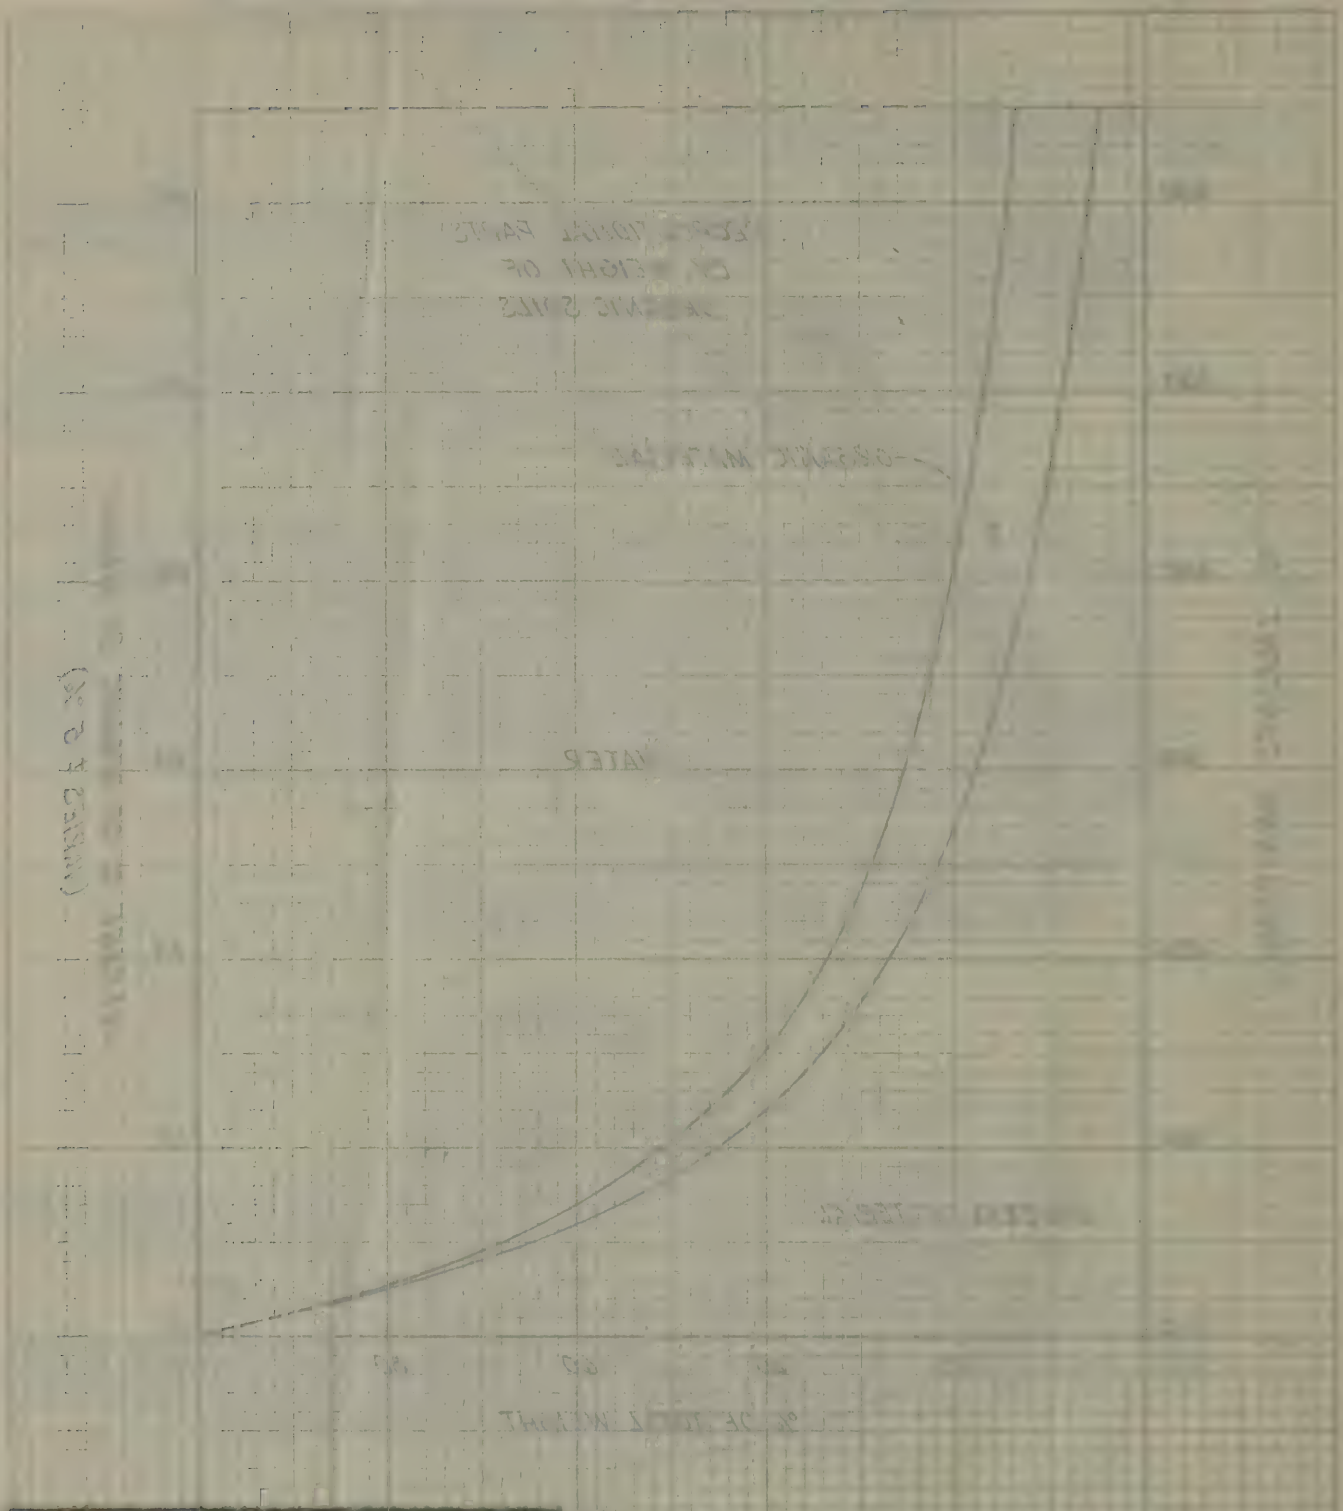

DEPARTMENT OF PUBLIC WORKS

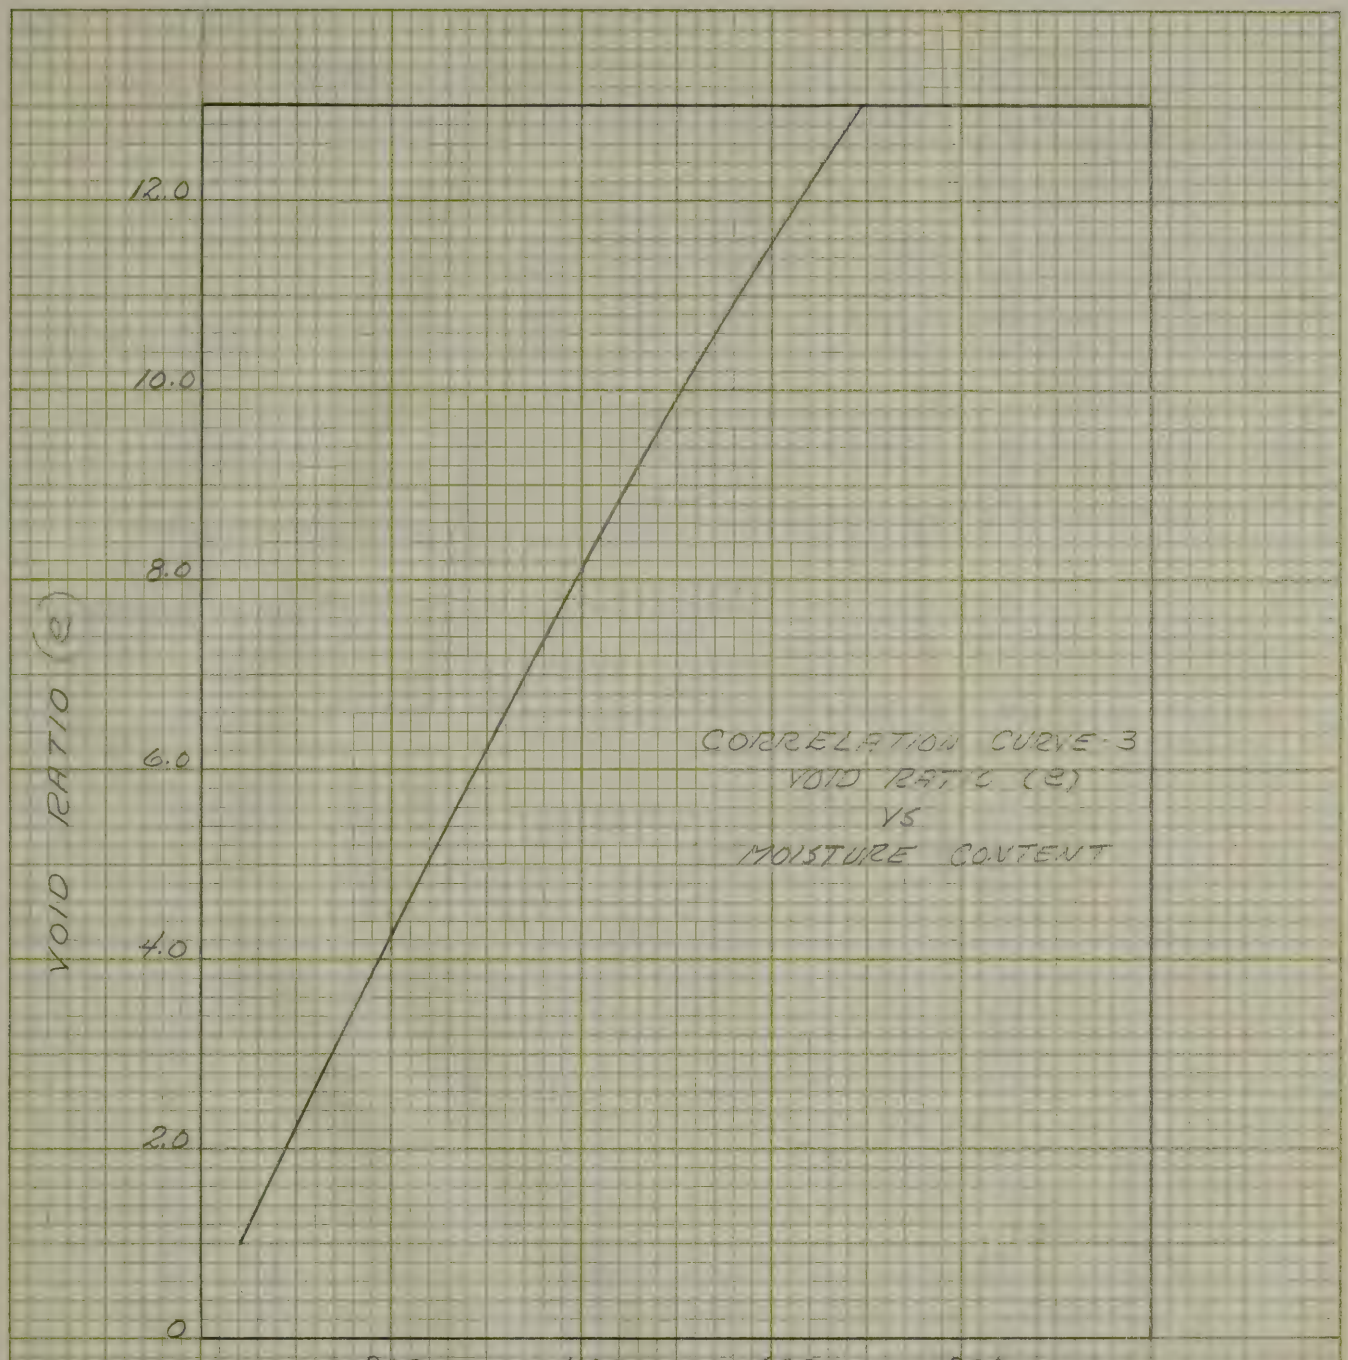

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 4A
CAT 9 FOR SETTLEMENT ANALYSIS - ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. M.D. COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606H

10 X 10 TO THE INCH 359-DUG
KEUFFEL & ESSER CO. MADE IN U.S.A.

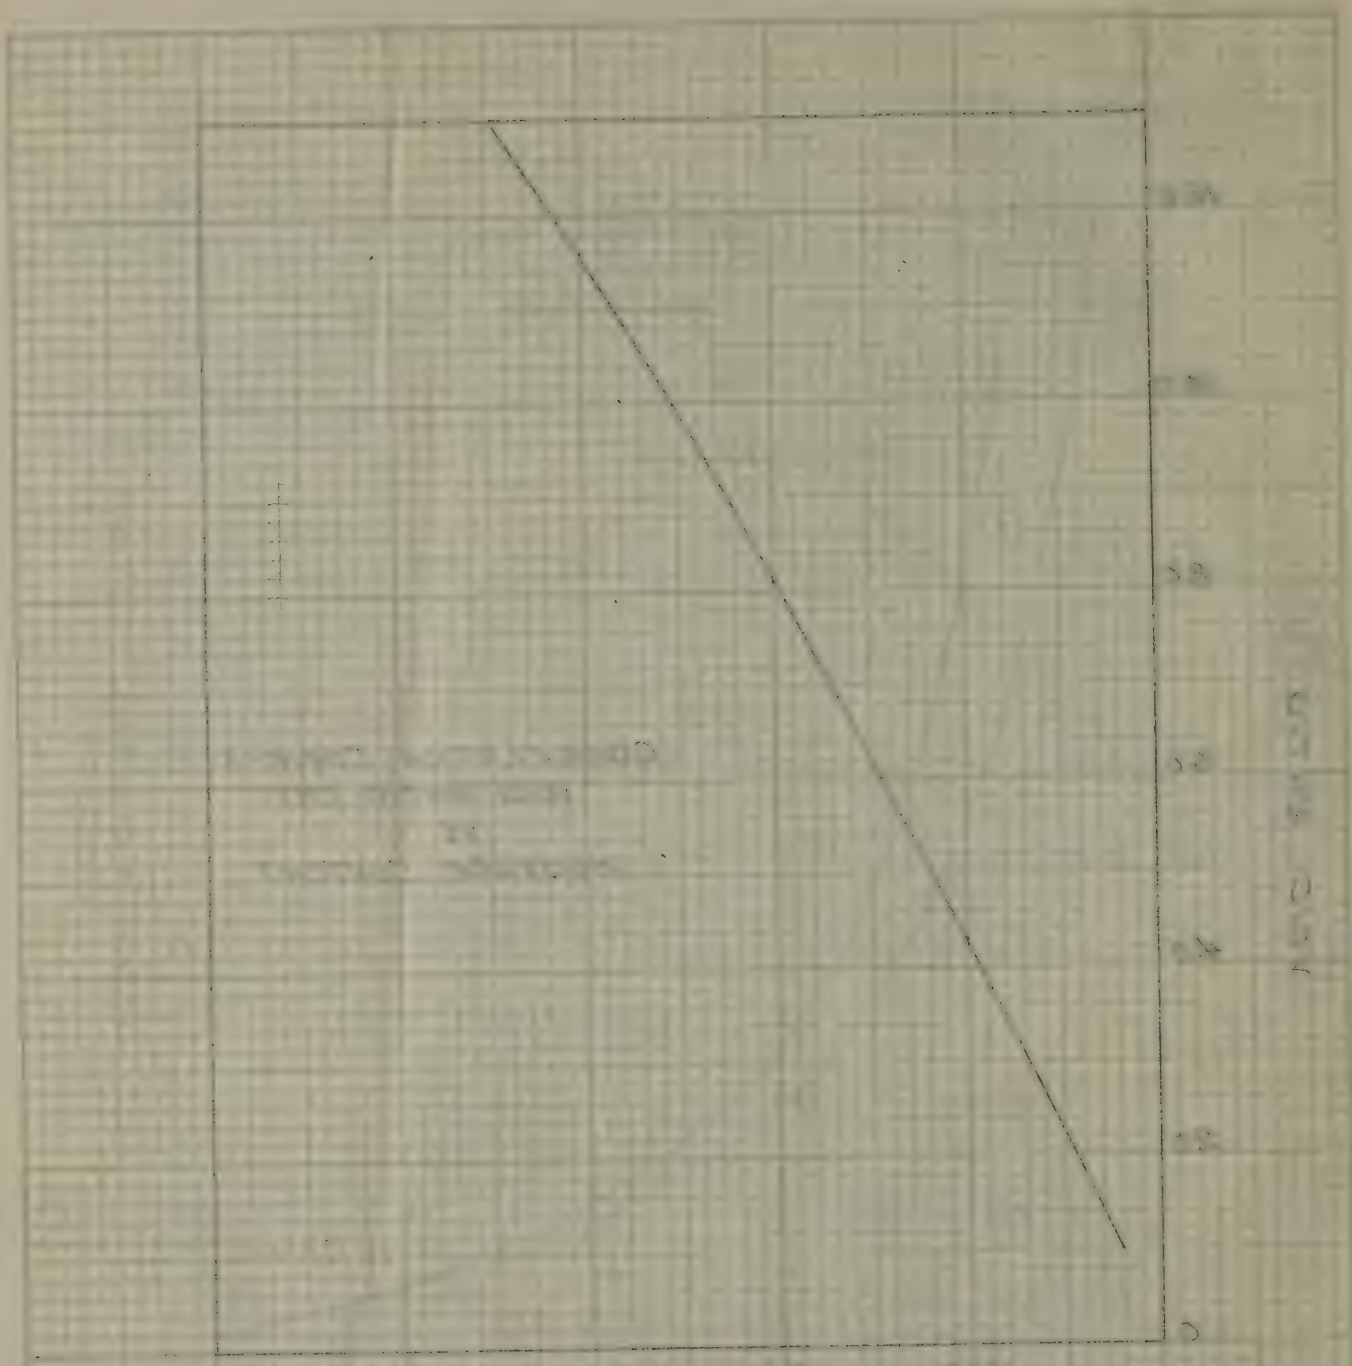

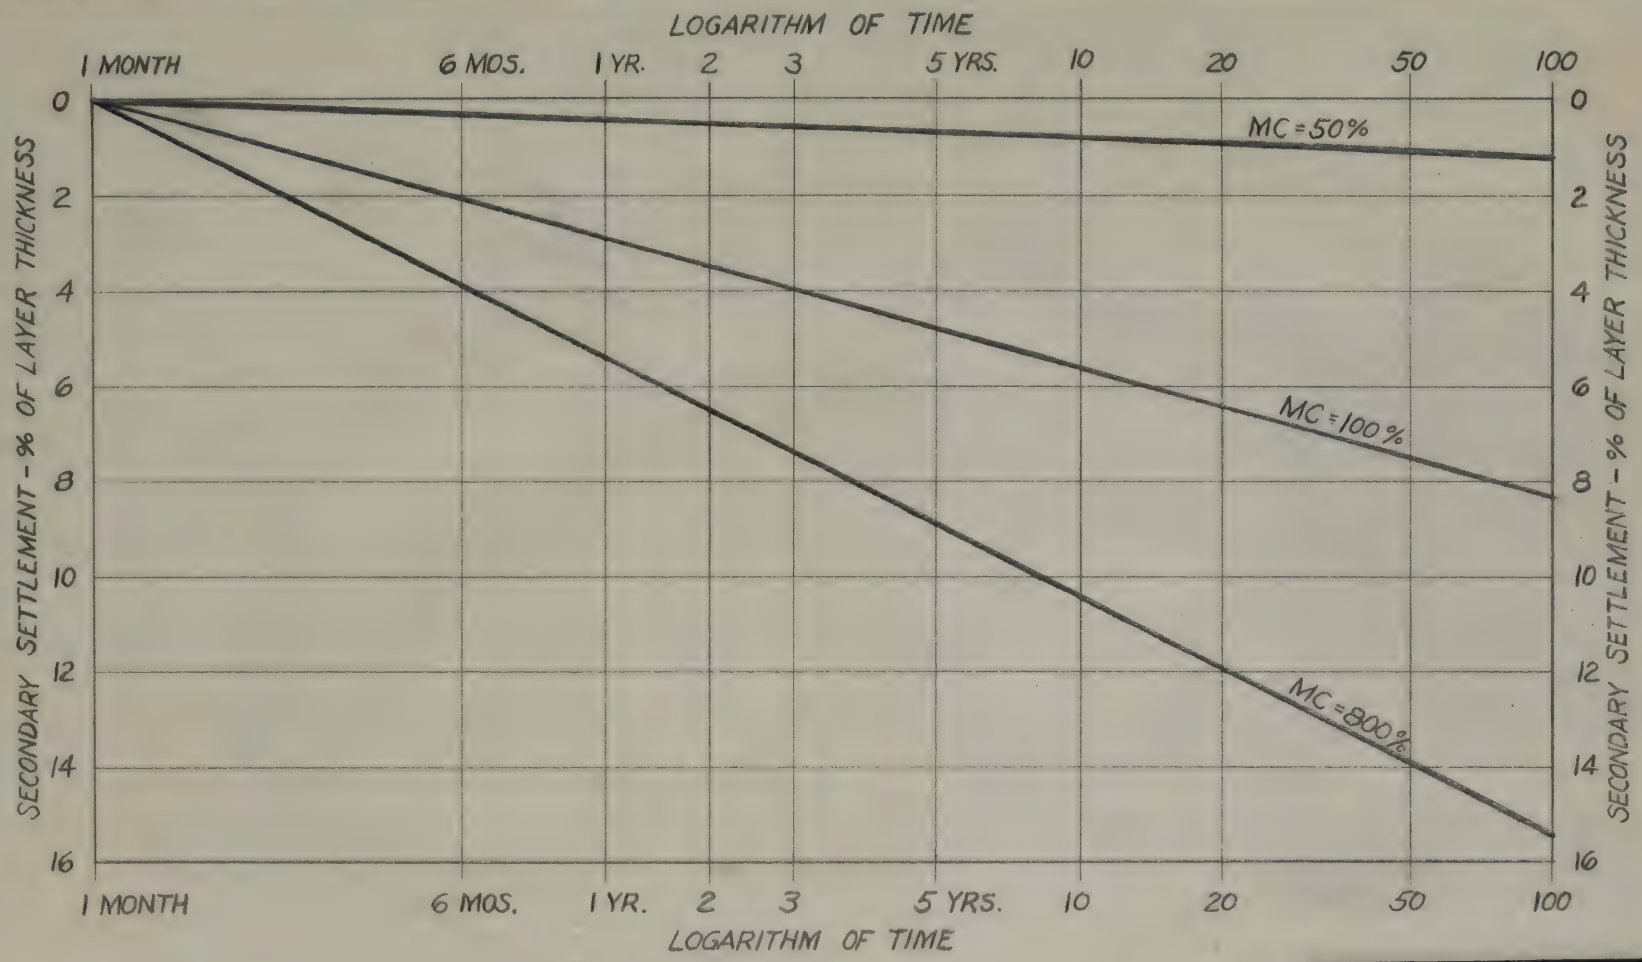

NOTE - START CALCULATING THE AMOUNT OF ANTICIPATED SECONDARY SETTLEMENT FROM THE TIME OF THE END OF PRIMARY CONSOLIDATION TO THE EXPECTED LIFETIME OF THE PROJECT.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIG. 5A
ENGINEERING PROPERTIES OF ORGANIC SOILS
DATA FOR SECONDARY SETTLEMENT ANALYSIS

APPROVED 19	DISTRICT NO. MO COUNTY ALBANY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606 J

PRELIMINARY

PRELIMINARY CHART FOR ESTIMATING CONSOLIDATION PROPERTIES OF SWAMP SOILS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

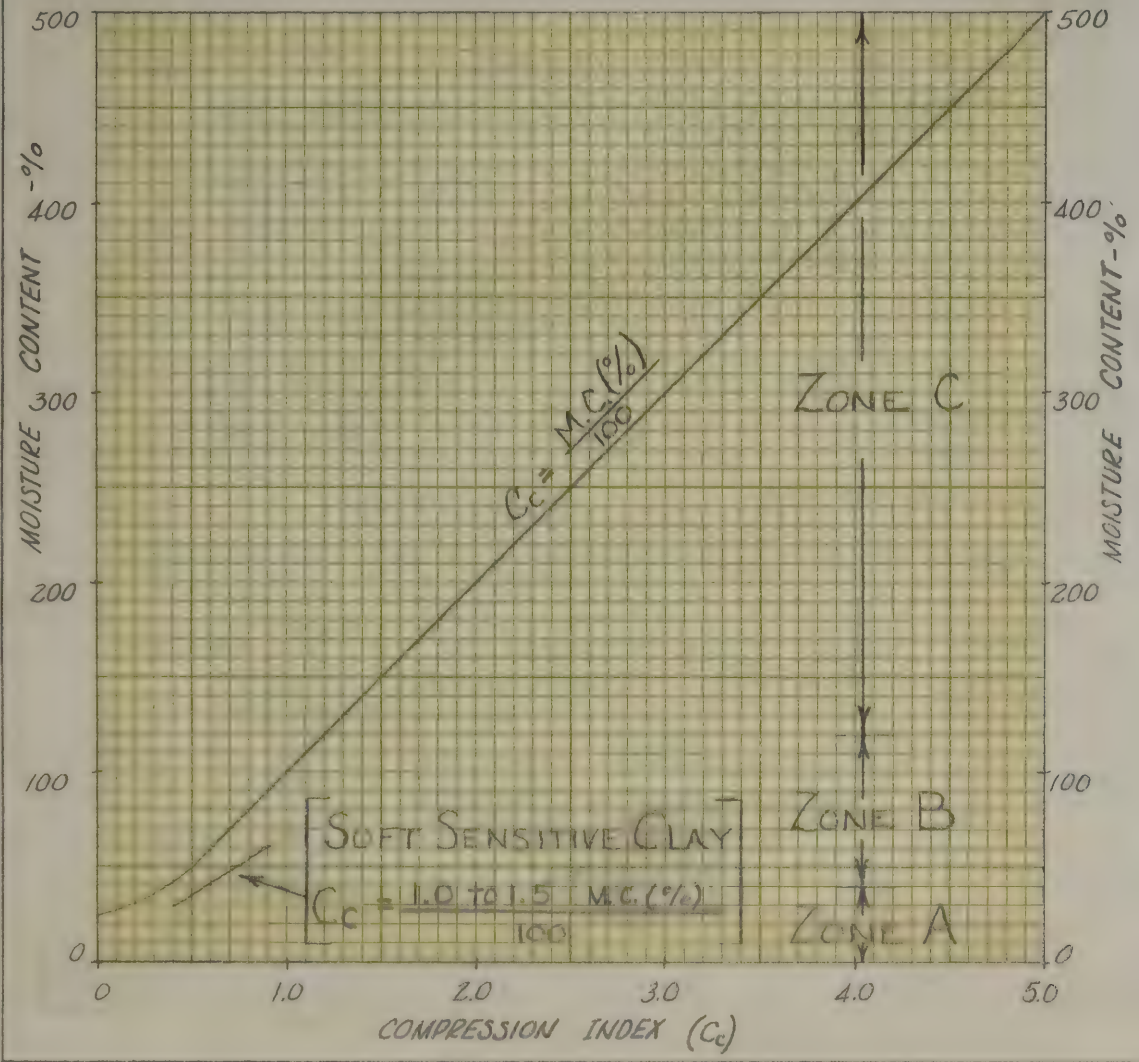

ZONE A - Loose silts and fine sands
Compression Index (C_c)=0.1 to 0.8
Coefficient of Consolidation (C_v)=1.0 to 10.0 ft.^{2} per day.

ZONE B - Organic mixed with inert soils
Coefficient of Consolidation (C_v) will vary with type and amount of inert soil.
For organic with clay - C_v= .03 to .07 ft.^{2} per day.
For organic with silt and sand - C_v=0.1 to 1.0 ft.^{2} per day.

ZONE C - Soils with high organic content C_v=0.1 to 2.0 ft.^{2} per day depending on structure of soil.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 3

ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606C

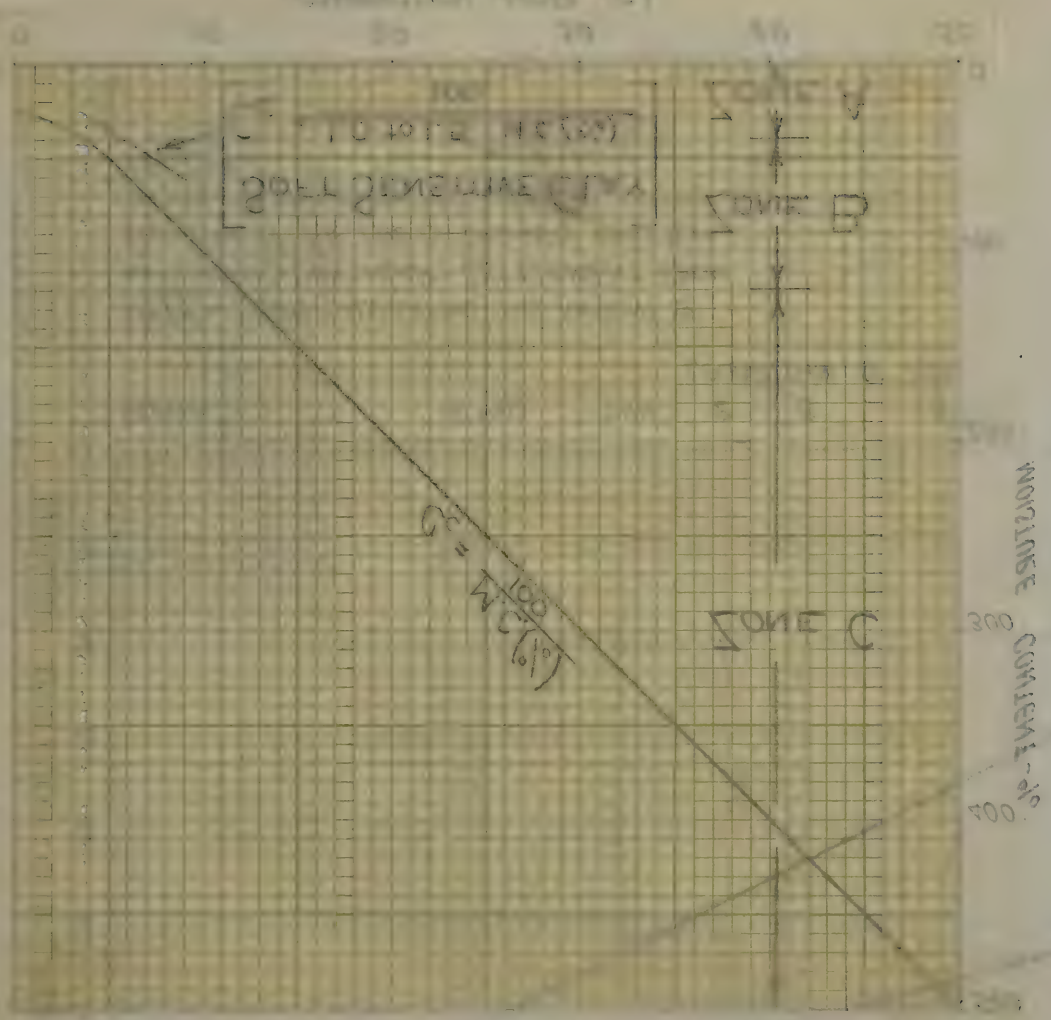
ZONE A
ZONE B
ZONE C
$C_c = \frac{W_L(\%)}{100}$
300
400

PRELIMINARY CHART FOR ESTIMATING SUITABILITY OF ORGANIC SOILS FOR HIGHWAY EMBANKMENT FOUNDATIONS BASED ON SOIL IDENTIFICATION AND MOISTURE CONTENT

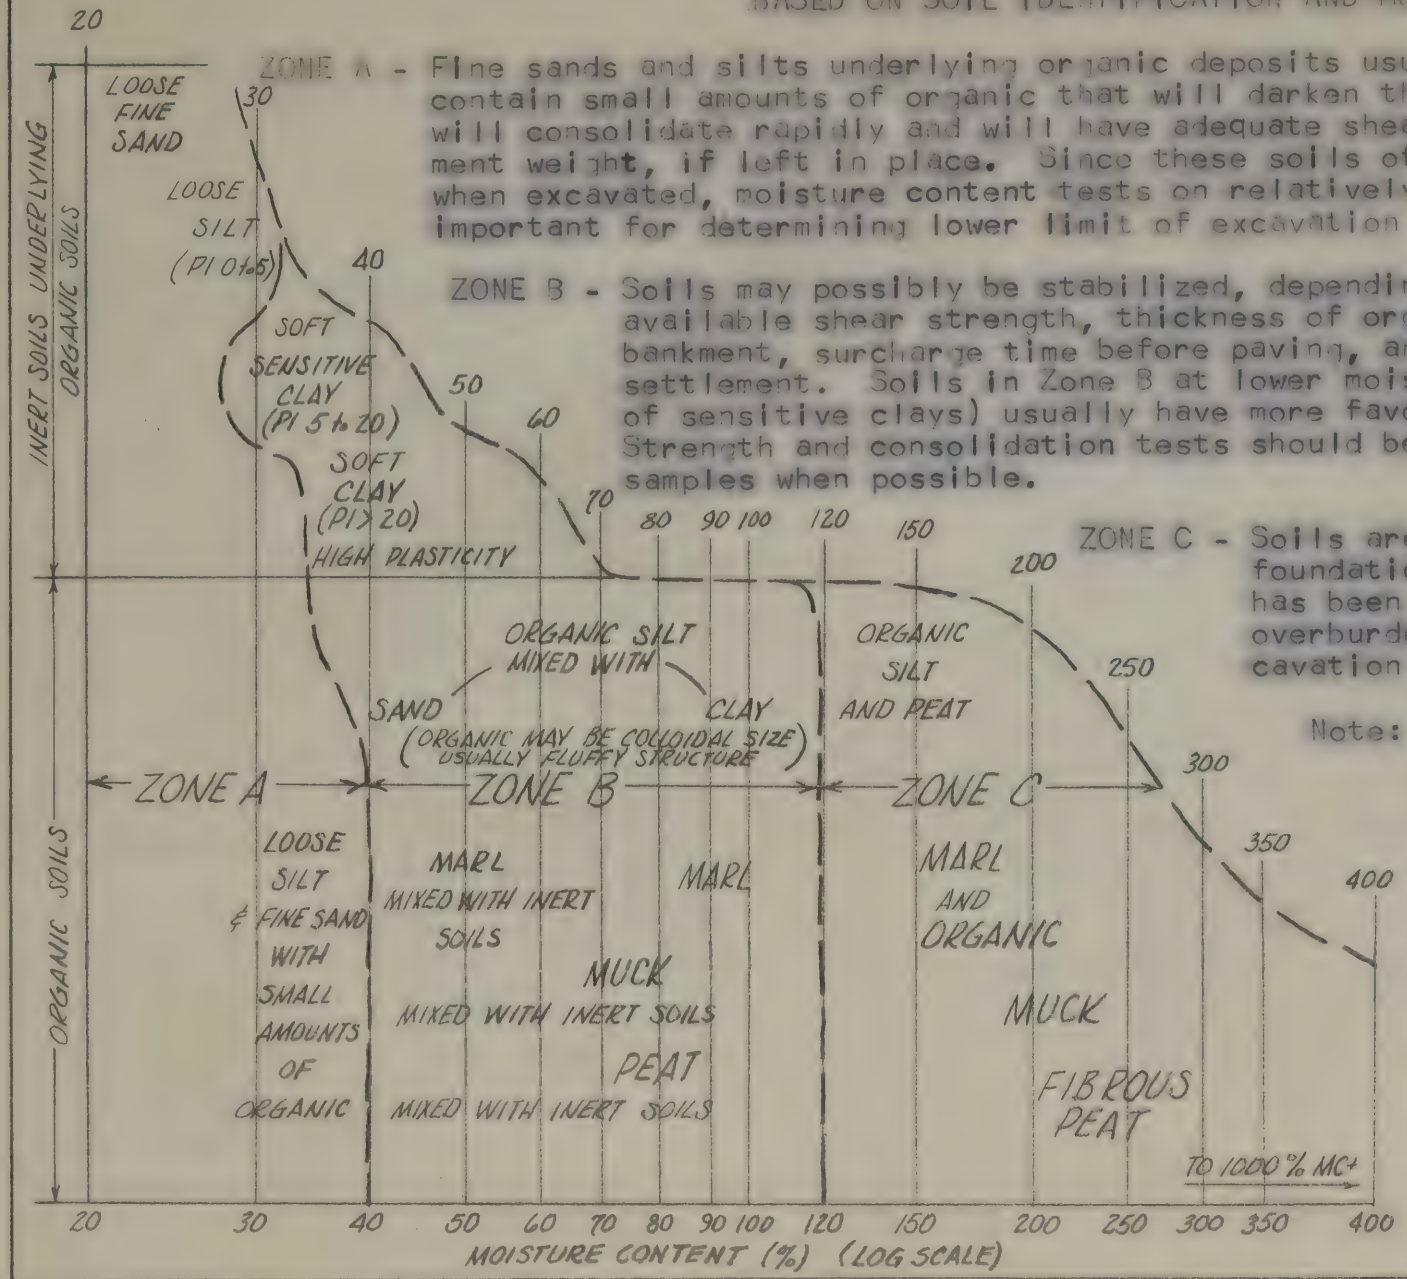

ZONE A - Fine sands and silts underlying organic deposits usually are loose and sometimes contain small amounts of organic that will darken the soil color. These soils will consolidate rapidly and will have adequate shear strength to support embankment weight, if left in place. Since these soils often appear to be "unsuitable" when excavated, moisture content tests on relatively undisturbed samples will be important for determining lower limit of excavation in field.

ZONE B - Soils may possibly be stabilized, depending on rate of consolidation, available shear strength, thickness of organic deposit, height of embankment, surcharge time before paving, and allowable post-construction settlement. Soils in Zone B at lower moisture contents (with exception of sensitive clays) usually have more favorable engineering properties. Strength and consolidation tests should be conducted on undisturbed samples when possible.

ZONE C - Soils are unsuitable for embankment foundations unless deposit is thin or has been precompressed by existing overburden. Otherwise remove by excavation or displacement.

Note: A visual inspection of the sample will aid in identification of soil.

PRELIMINARY

STATE OF NEW YORK
DEPARTMENT OF PUBLIC WORKS
DIVISION OF CONSTRUCTION
BUREAU OF SOIL MECHANICS

FIGURE 4

ENGINEERING PROPERTIES OF ORGANIC SOILS

APPROVED 19	DISTRICT NO. COUNTY
PRINCIPAL SOILS ENGINEER	DWG. NO SM 1606 D

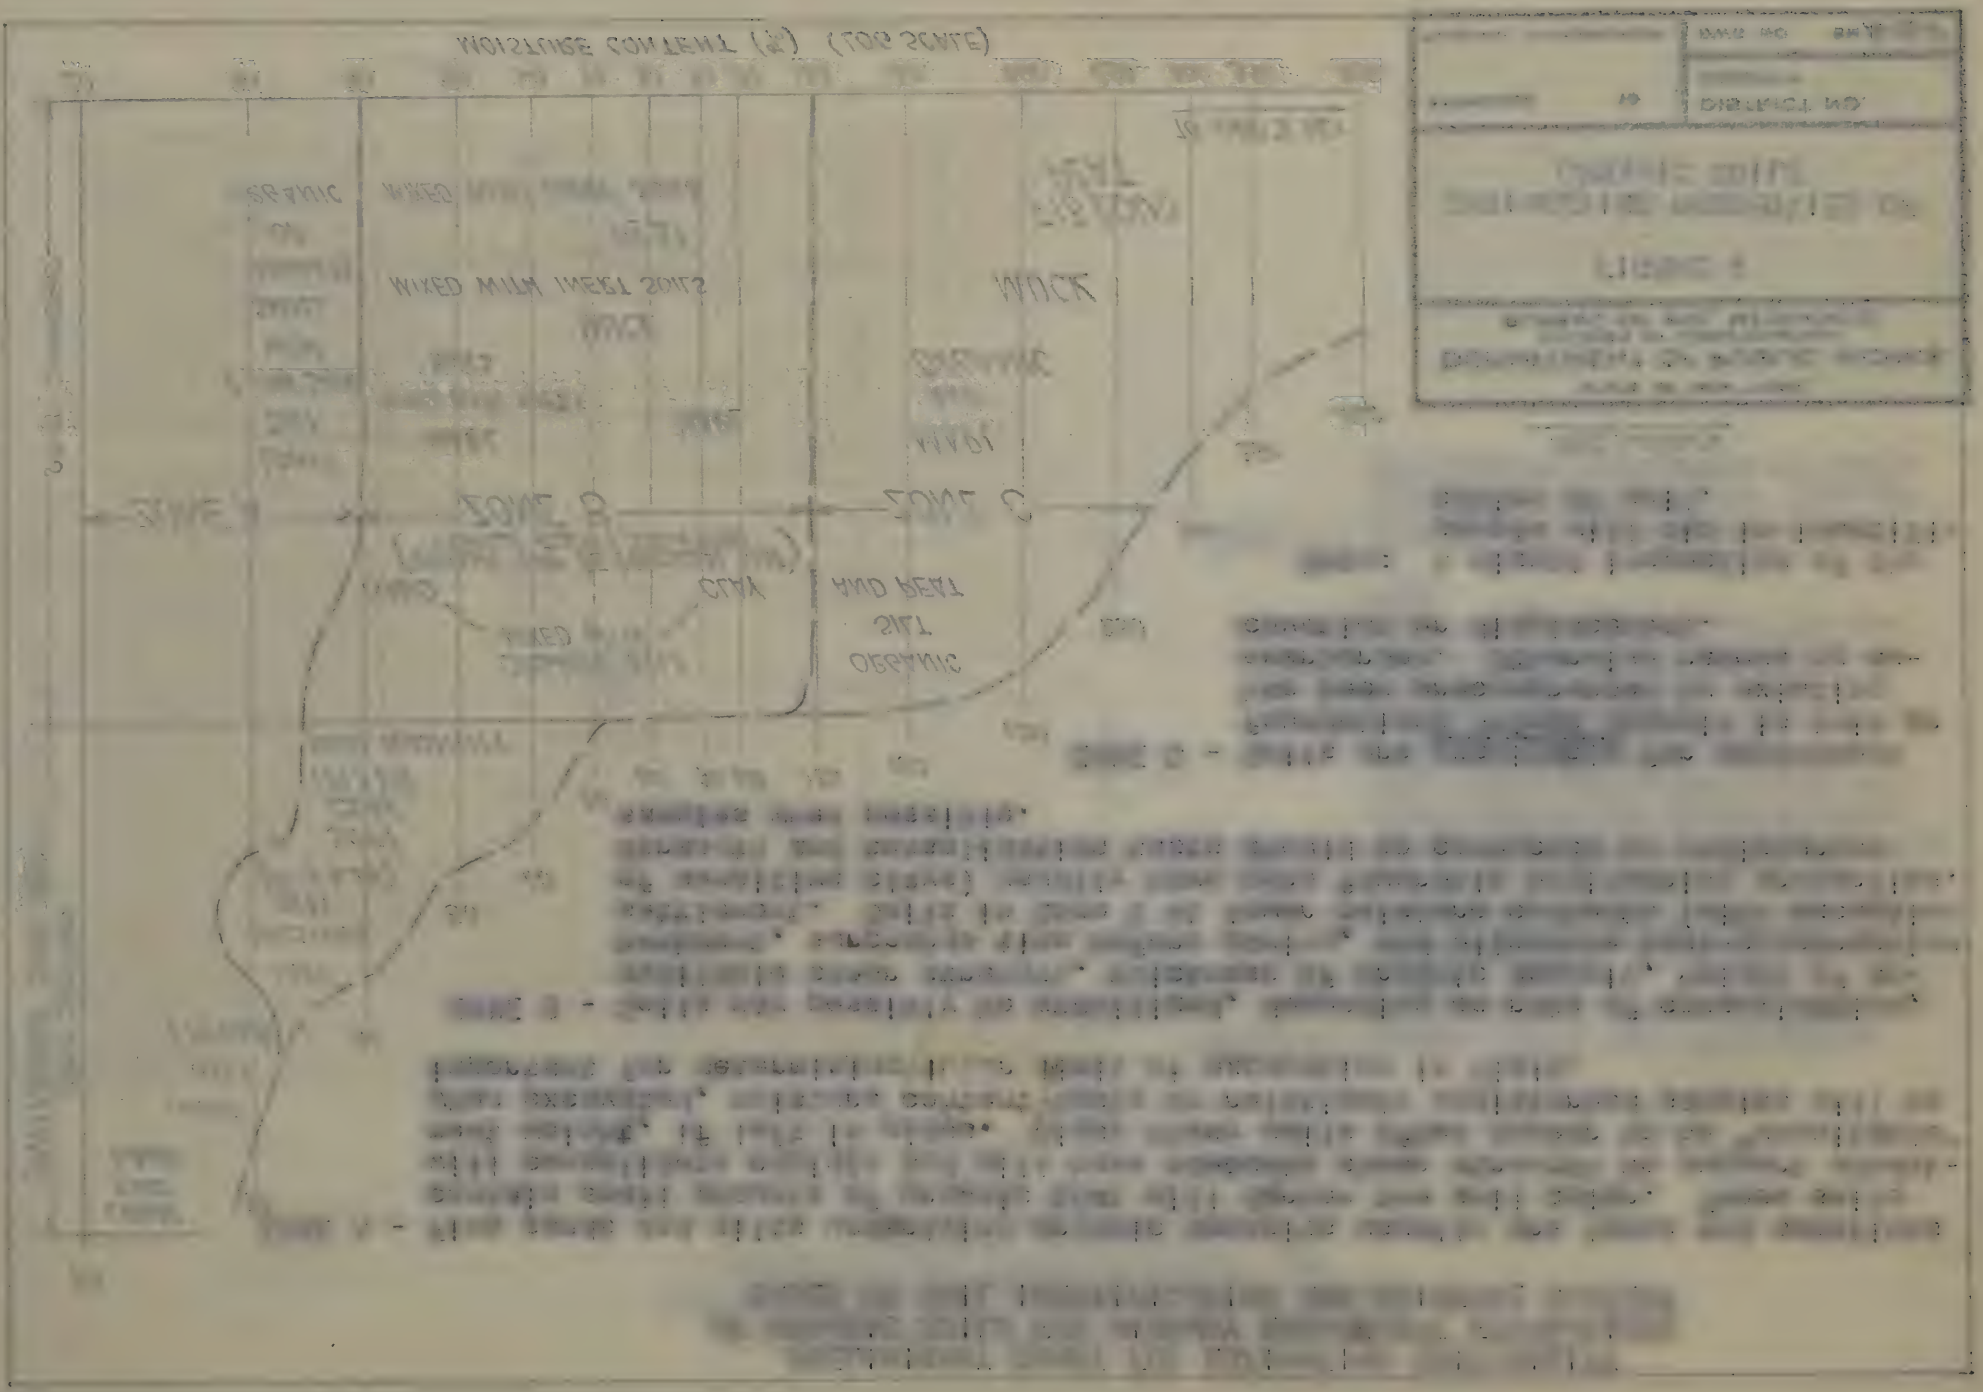

MEMORANDUM
DEPARTMENT OF TRANSPORTATION

DATE March 10, 1976

SUBJECT OVERSTRESS ANALYSIS ON SENSITIVE CLAYS

FROM R. L. Gemme

TO V. C. McGuffey

As we discussed, I have prepared the following guide to running overstress stability analysis on sensitive clays.

Overstress Stability Analysis

Applicability

Progress overstress analysis when clay is sensitive and shearing stress at any point exceeds shearing strength.

Procedure - 1. Check for Clay Sensitivity

- High moisture content clays with liquid limit exceeding moisture content by at least 10%.
- Unusually sharp break in the shear stress-strain curve.
- Ultimate strength is less than 80 percent of peak strength.
- Larger than normal pore pressure build-up during shear strength test.

2. Check for Overstress

- Plot shear stress with depth from chart on page 5-12 of design manual and compare to shearing strength with depth. The zone of overstress at time equals zero after embankment construction is where the shearing stress exceeds the shearing strength. This zone of overstress increases with time due to loss of shearing strength (ultimate strength) in the overstressed zone. The loss in strength continues until the net difference between the shearing stress and ultimate shearing strength is equal to zero (see Fig. No. 1) i.e. where

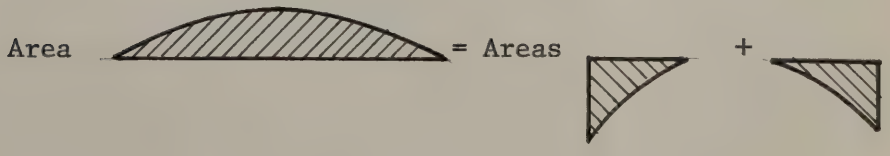

From experience ultimate shearing strength has been found to be in the order of 0.75 times the maximum shearing strength for sensitive New York clays. The limits of overstress increase with time as indicated above from undrained stress distribution. However consolidation and strength gain also increase with time depending on the rate of embankment construction and soil coefficients of consolidation. This tends to decrease the zone of overstress with time. These two rate processes are opposite in effect. To complicate matters comparatively large strains occur in the overstressed zone causing decrease in permeability which affects consolidation and ultimate strength gain.

Since sensitive soils are usually very slow consolidating and it is difficult to determine ultimate strength gain effects, strength increase due to consolidation should be neglected in the final analysis.

3. Progress overall stability analyses by the Bishop method utilizing design shear strength as obtained in Figure No. 1.

References, Maximum Shearing Stress Charts =

1) BSM Design Book Pg. 5-12
2) Plastic Charts, BSM Foundation Design Section Files
3) Navdocks pg. 7-5-1
4) Burmister Charts, HRB, Proceedings of 35th Annual Meeting, 1956
6) The Application of Theories of Elasticity and Plasticity to Foundation Problems. Leo Jurgenson, Journal of the Boston Society of Civil Engineers, July, 1934.
7) Poulos, H.G. & E.H. Davis "Elastic Solutions for Soil and Rock Mechanics," John Wiley & Sons, 1974.

RLG:MF

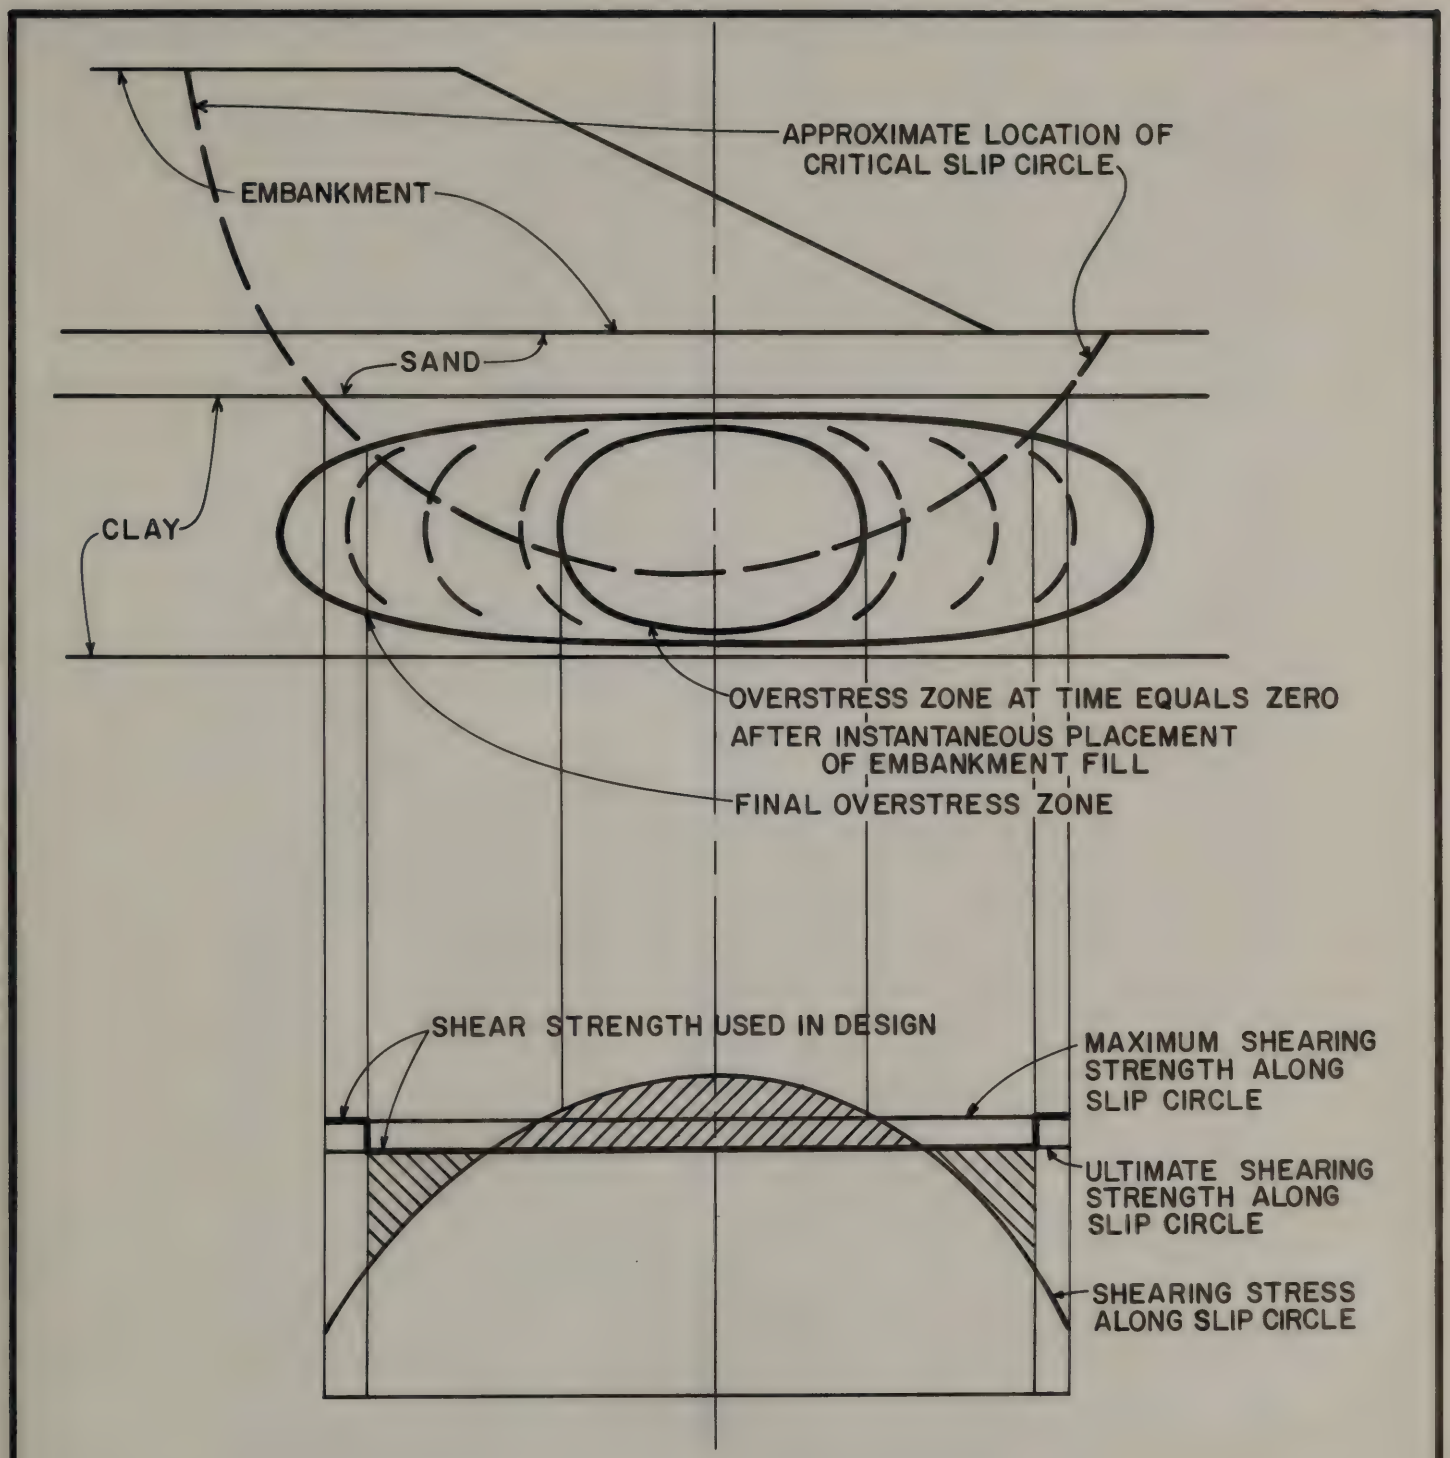

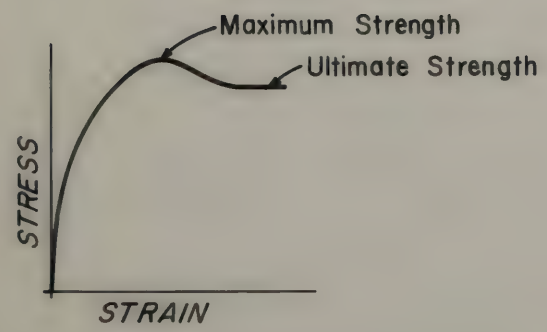

Fig. 1

OVERSTRESS ANALYSIS ON SENSITIVE CLAYS

Fig. 1

OVERSTRESS ANALYSIS ON SENSITIVE CLAYS

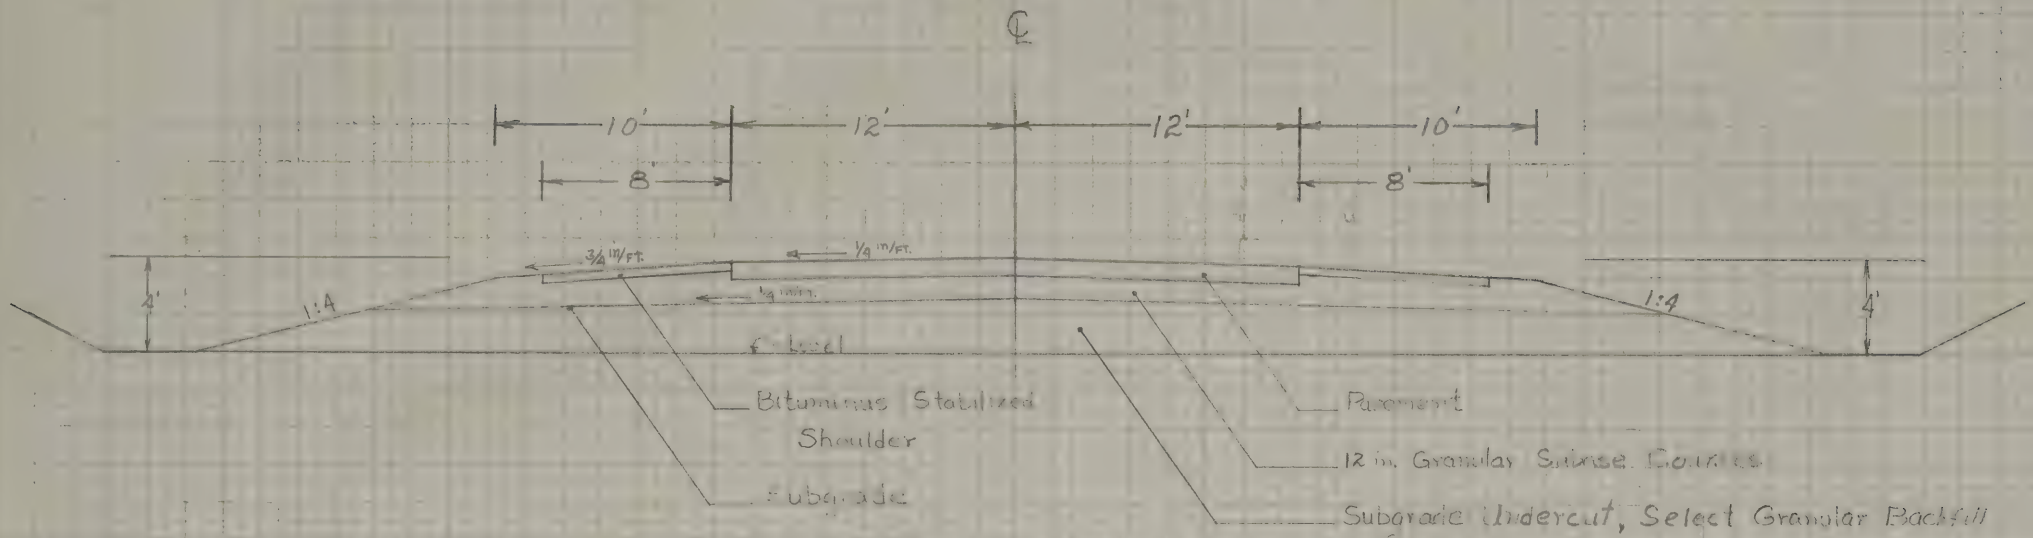

TYPICAL SECTION
SUBGRADE UNDERCUT
scale 1" = 1'-0"

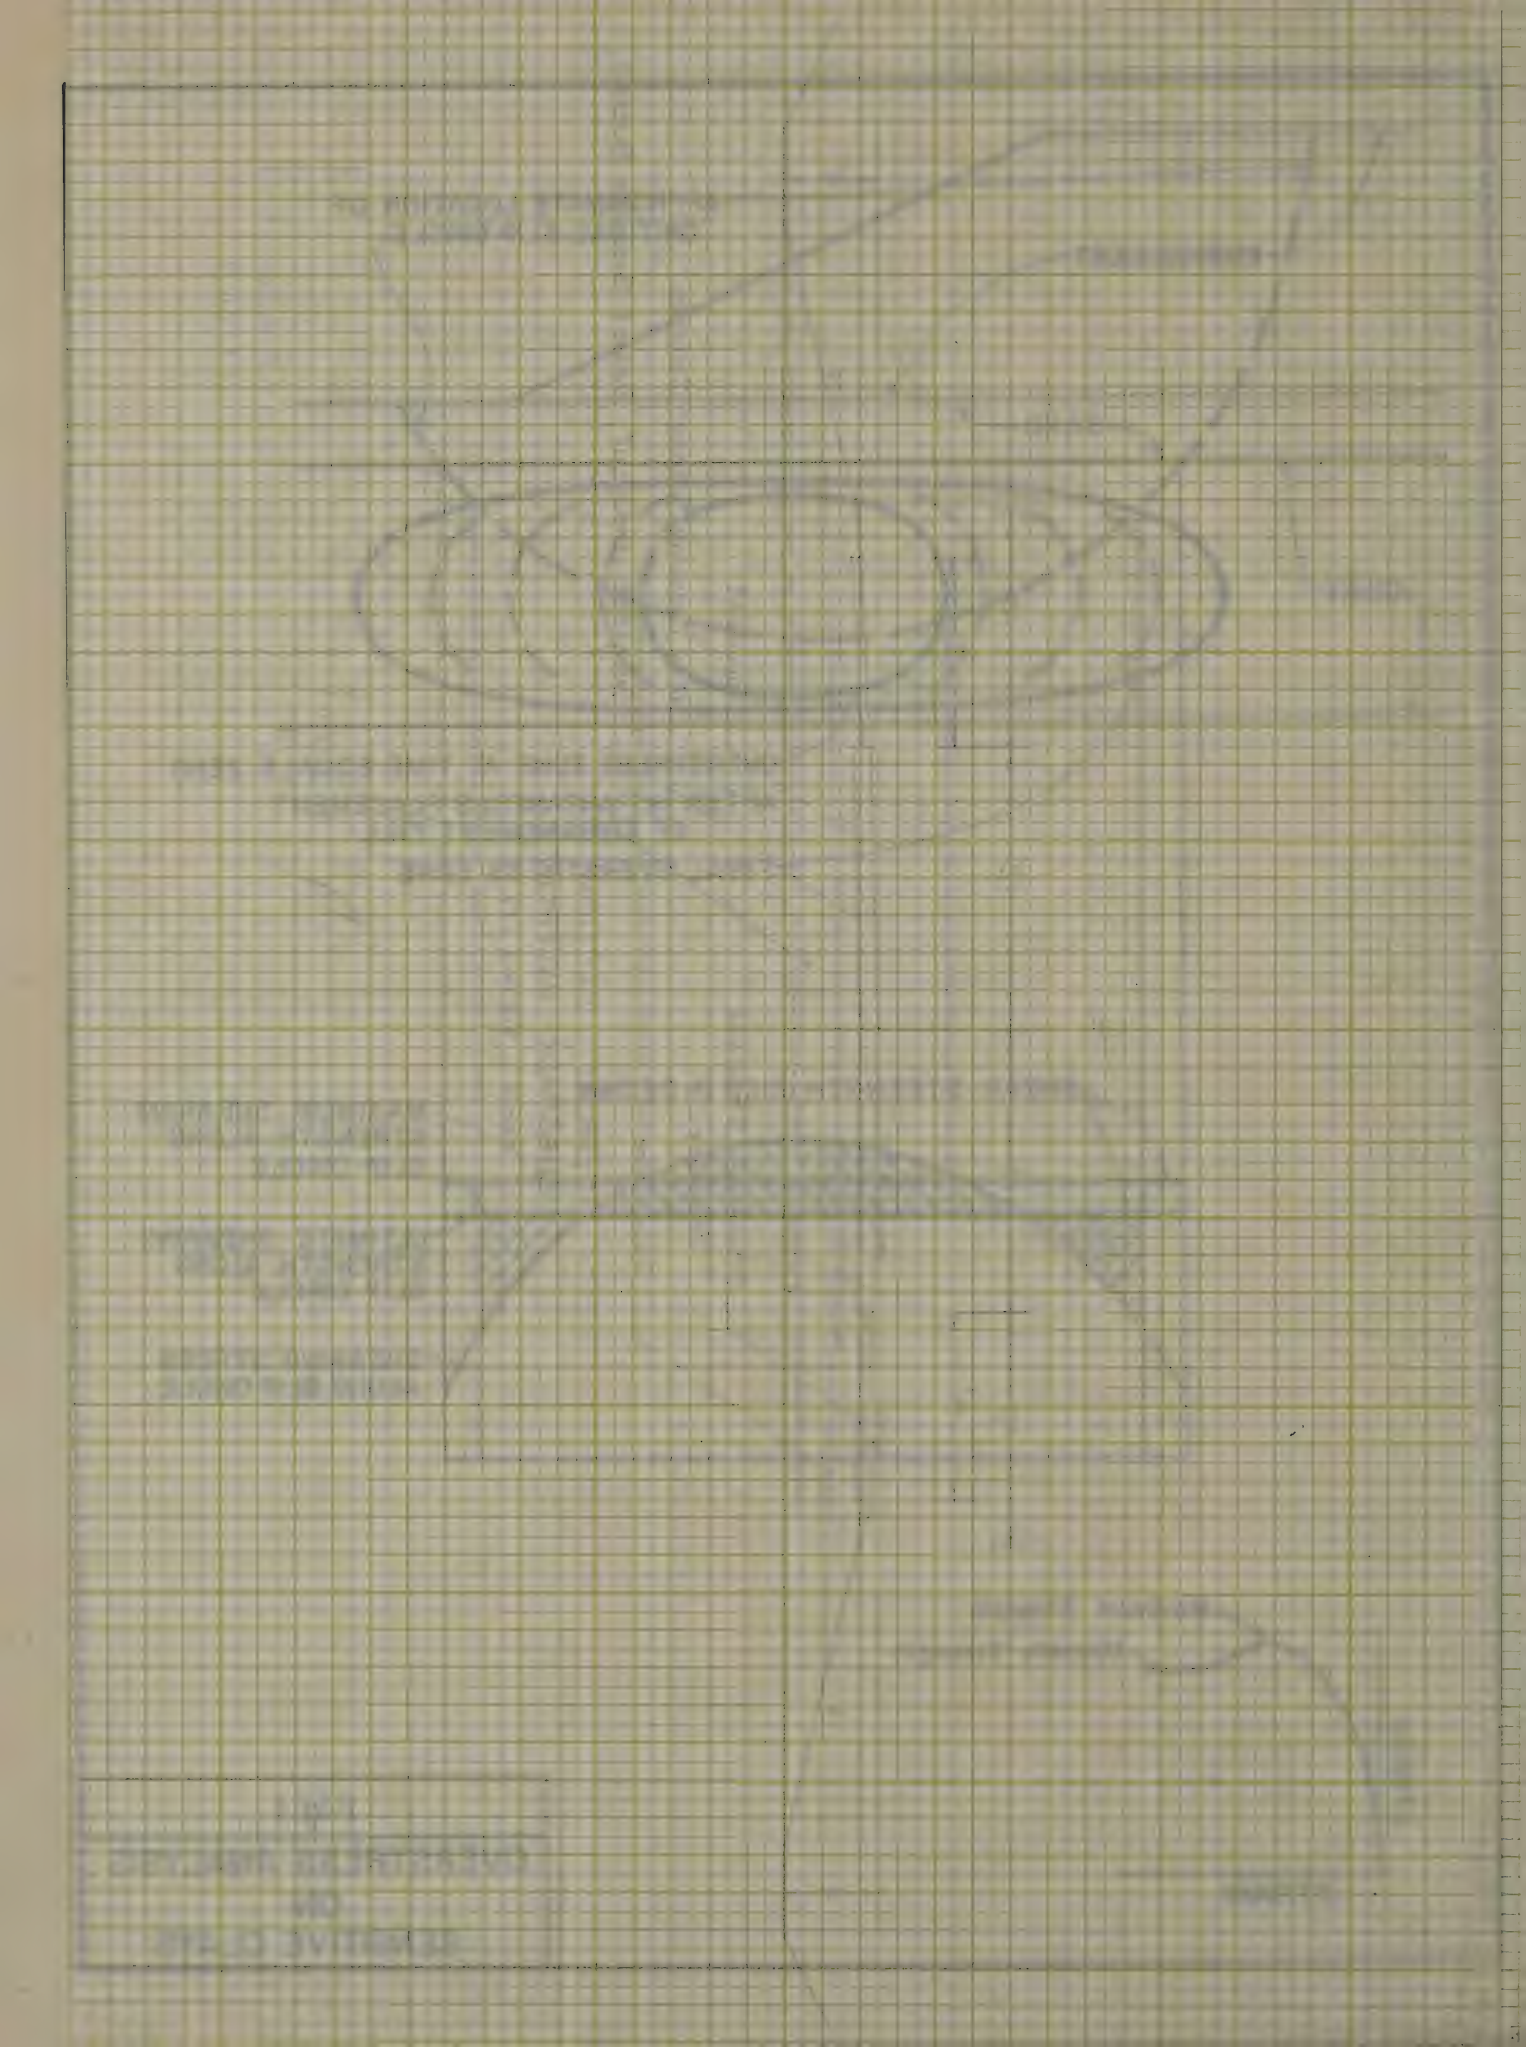

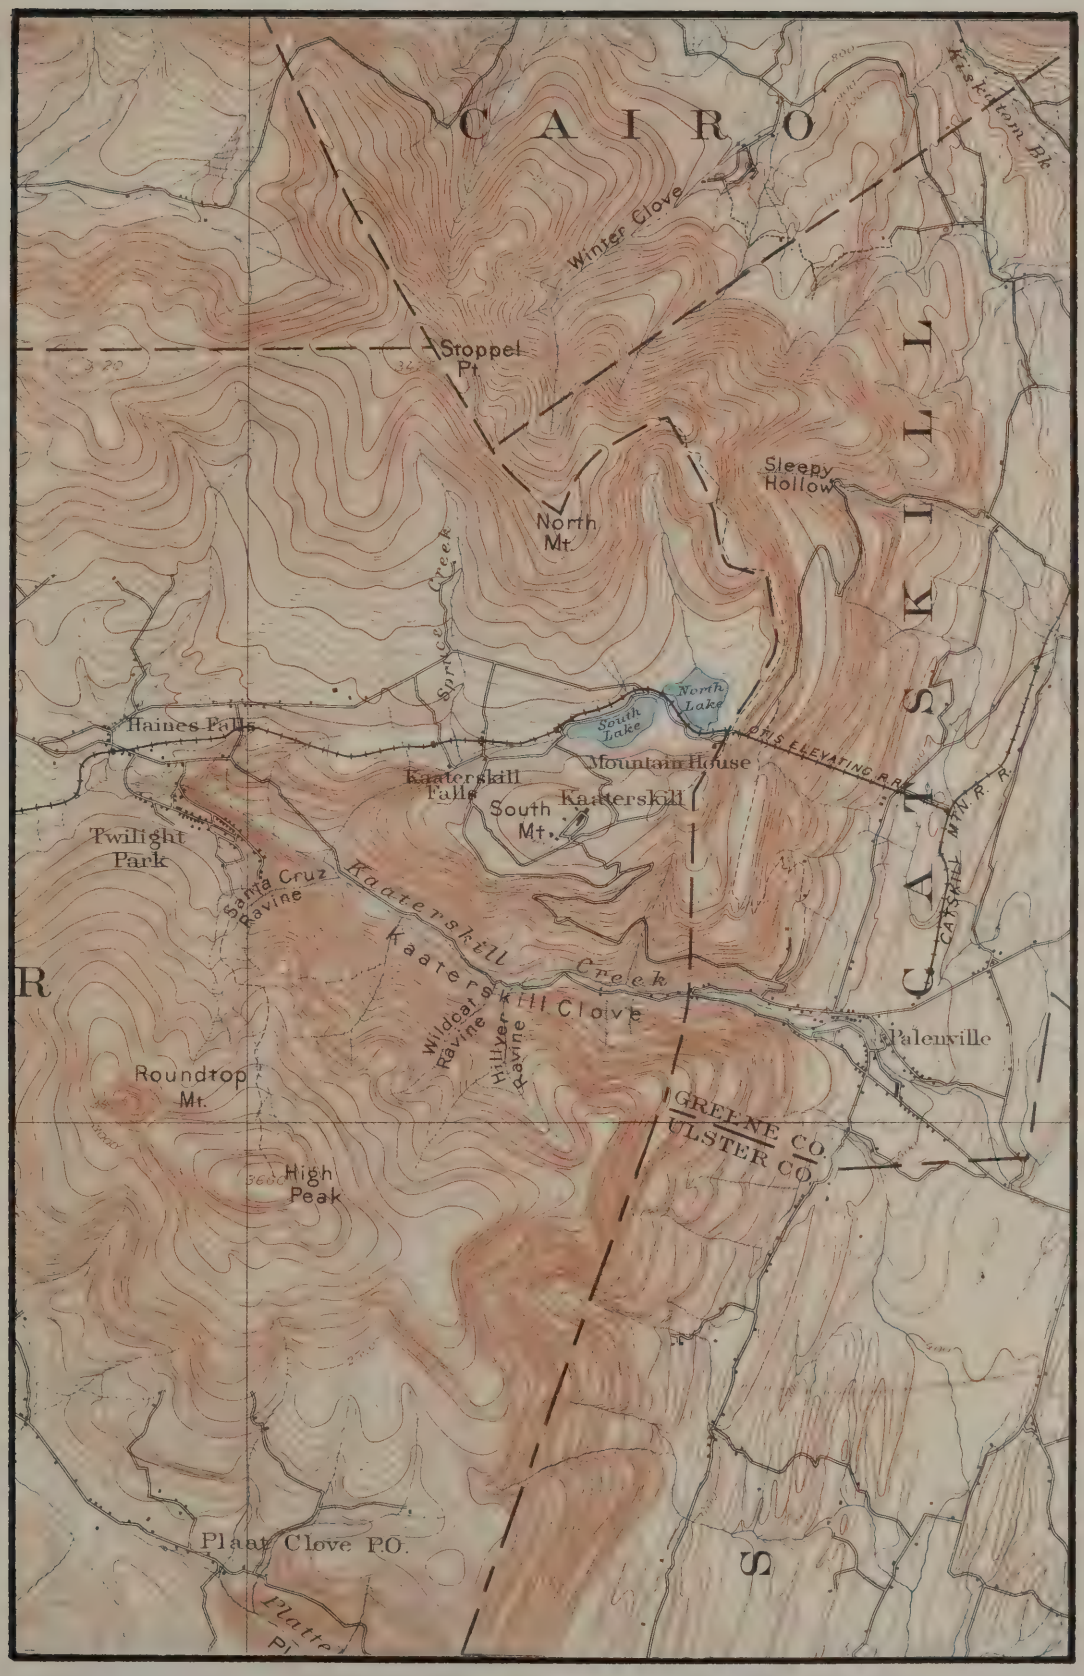

SCALE 1:24000

0 1/2 1 MILE

CONTOUR INTERVAL FEET

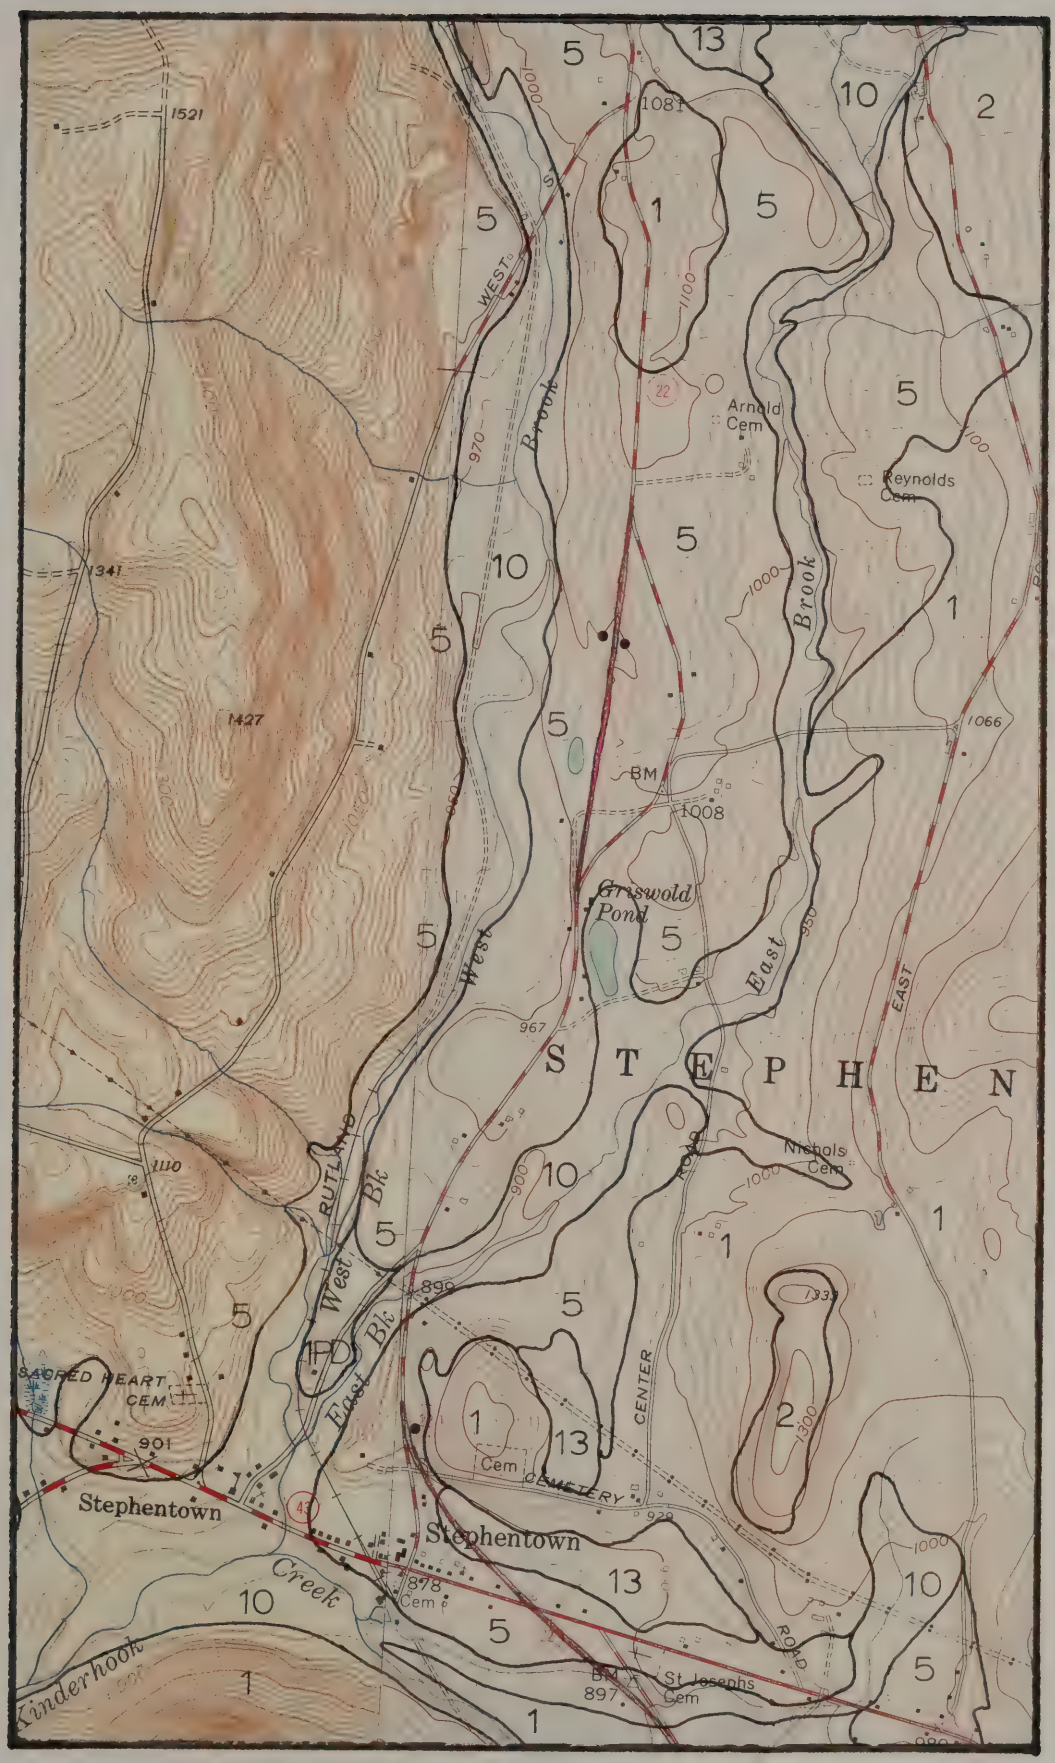

SCALE 1: 24000

0 1/2 1 MILE

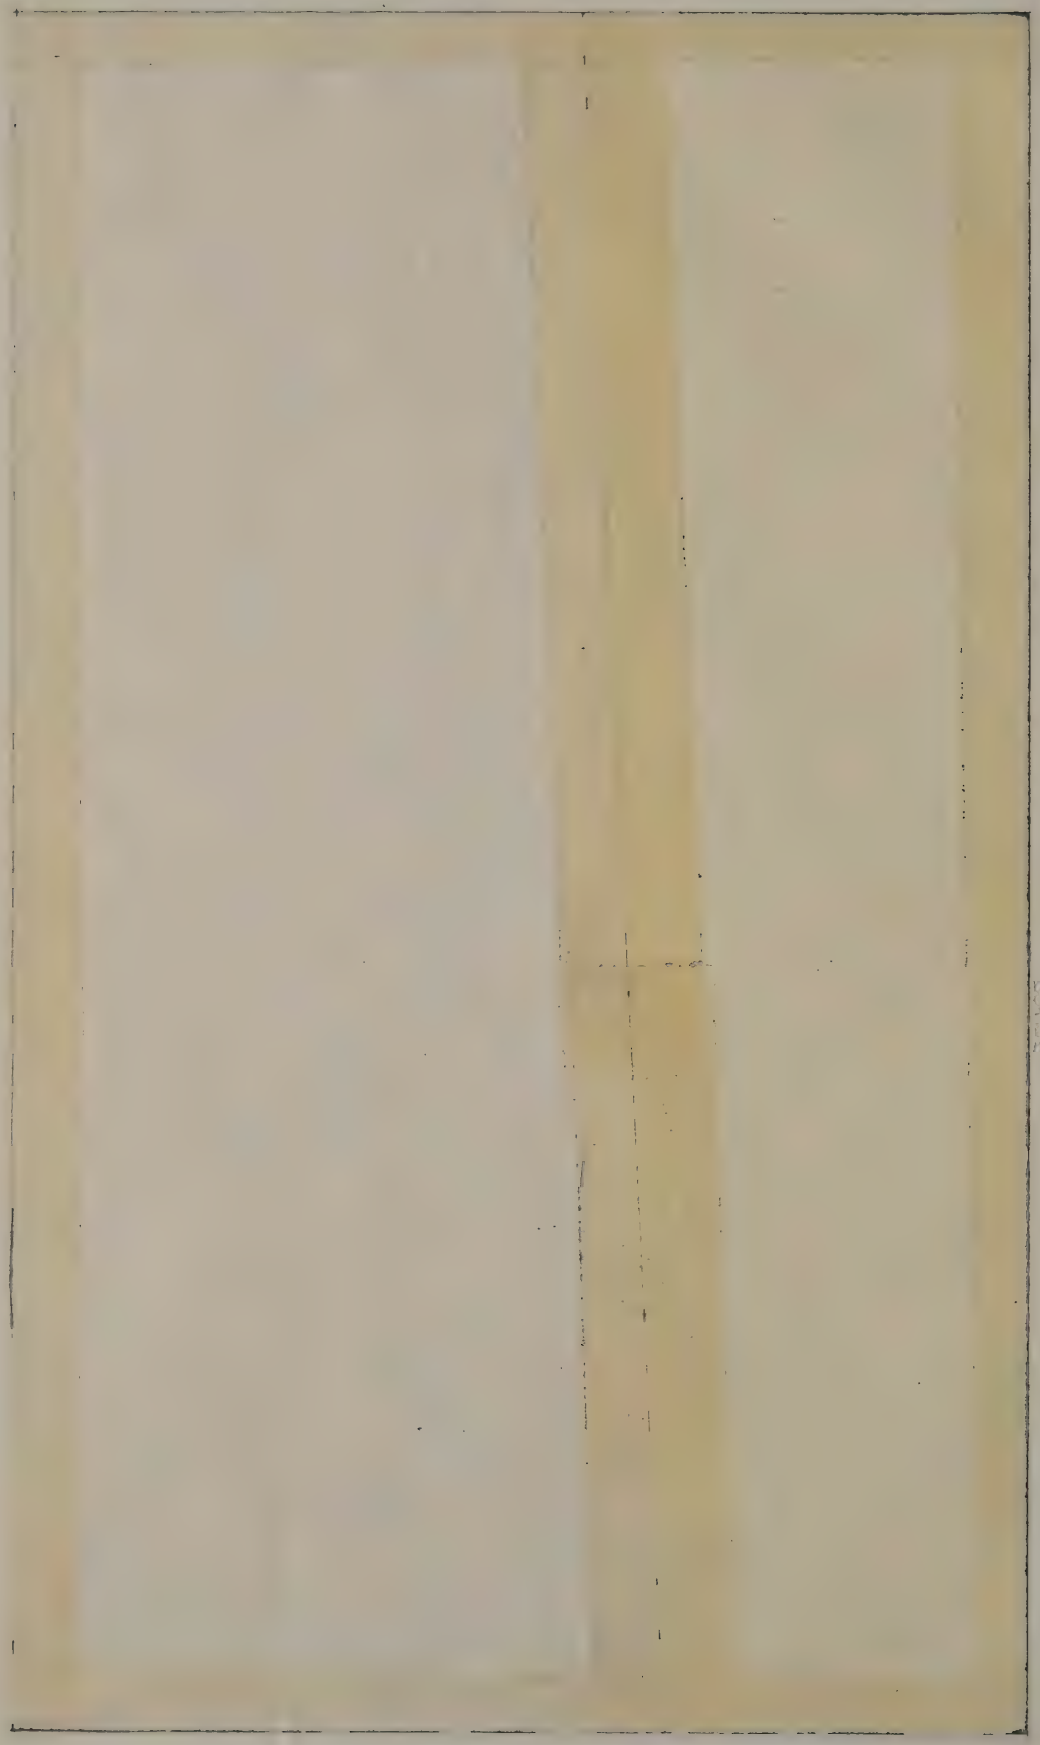

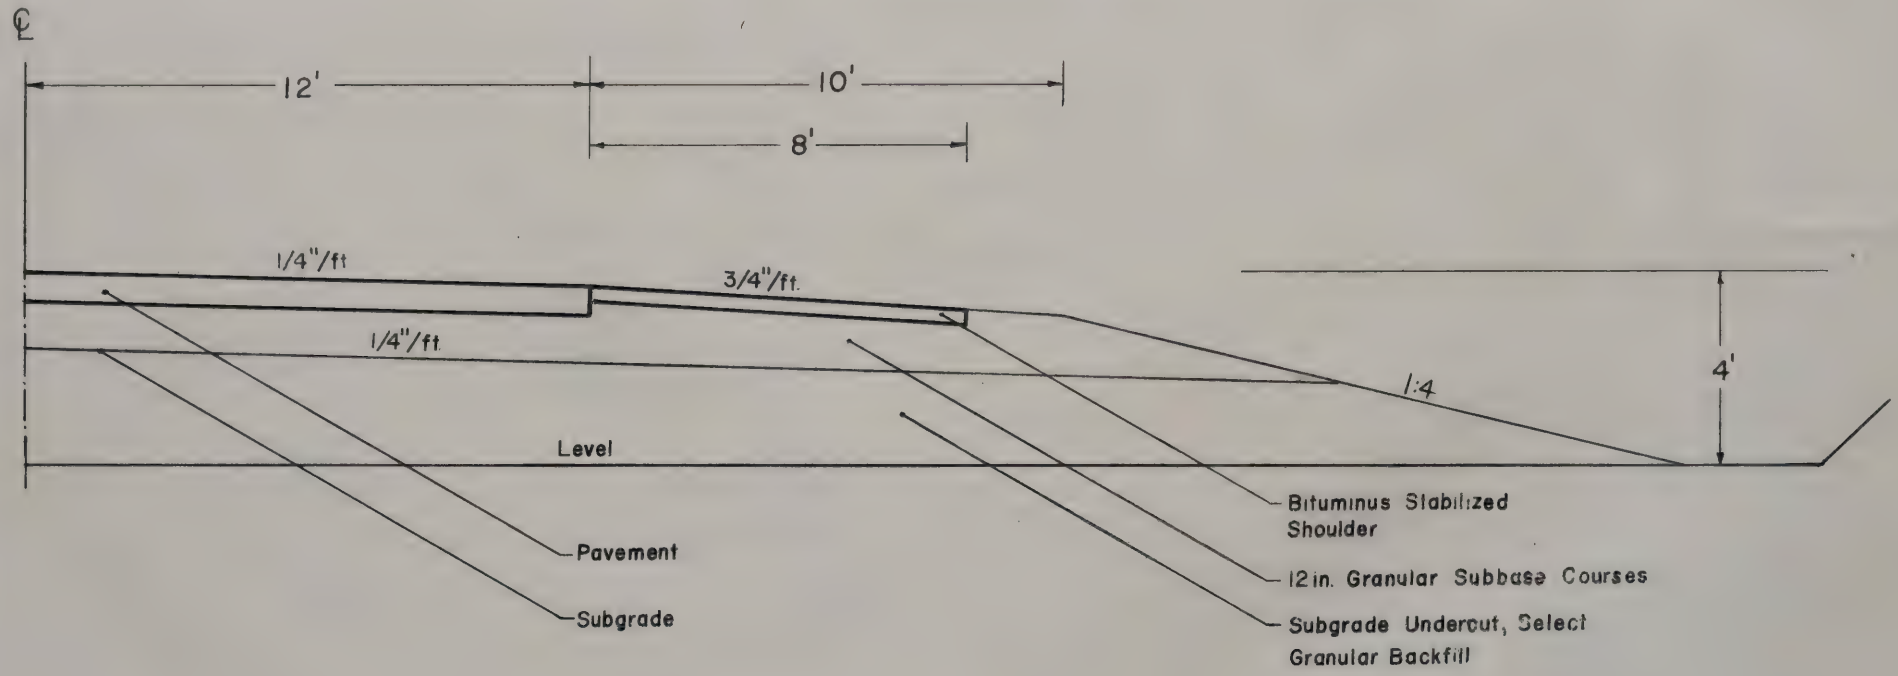

TYPICAL SECTION
SUBGRADE UNDERCUT

SCALE $\frac{1}{4}$" = 1 ft

TYPICAL SECTION
SUBGRADE UNDERCUT
SCALE 1" = 1'
Subgrade
Pavement
Level
12'
10'
8'
4'
4:1

GENERALLY - EMERGENCIES ALONG LAKE CHAMPLAIN

Slide 1 GLACIATED 1,000,000 YRS AGO
THE SOIL DEPOSITS WER CONTROLLED BY THE GLACIER
1 - TILL UNDER ICE
2 - SANDS & GRAVELS - AREAS of HIGH VELOCITIES IN ICE MELT
3. SILTS & SAND - LOWER WATER VELOCITIES FROM ICE MELT
4. SILT & CLAY - LAKES OR NO WATER VELOCITY
- SILT & CLAY GENERALLY - ENGINEERING PROBLEMS

Slide 2 1960 SPAR MILL BAY LOCO · 20 FT

Slide 3 MUDWAVE - 150 FT FROM TRACK
LAKE BOTTOM RAISE 12-15 FEET
~~WERE THE SLIDE OCCURRED~~
THE AREA WAS APPARENTLY MOVING SLOWLY BEFORE THE SLIDE SINCE
① THE TRACKS WERE RAISED TWICE IN 4 DAYS
② DERAILMENT - APPARENTLY CAUSED BY MORE SETTLEMENT ~~TO THE TRACK~~
THE SLIDE OCCURRED SUDDENLY BENEATH WORK TRAIN THAT HAD BEEN IDLING ABOUT 1 HR IN THE AREA ~~AFTER~~ AFTER REMOVING THE WRECKAGE FROM THE DERAILMENT

Slide 4 PLAN - LAND SLIDE TOPO - POSSIBLY 1000 YRS old
TRACKS - 100 FT FROM LAKE
DISPLACED SHORE

Slide 5 SECTION WE FEEL THAT ^THE SLIDE WAS PROBABLY ACCELERATED ~~CAUSED~~ BY THE ENGINE VIBRATIONS. ~~THESE VIBRATIONS~~ THE LIQUIFIED ~~OR~~ SILT LAYER ON THE SUSUPTIBLE SILT LAYERS. PROBABLY CAUSED THE SILT TO BEHAVE AS A LIQUID WHICH ~~CAUSED~~ CAUSED THE EMBANKMENT TO DROP DOWN —

VARVED OR LAYERED

SLIDE HORIZONTALLY AND RAISE THE LAKE BOTTOM UP

SINCE THE RR WANTED THE TRACKS OPEN ASAP THERE WAS NO TIME FOR DETAILED ANLYSES THEREFORE THIS BERM WAS ESTIMATED BASED ON EXPERIENCES IN HIGHWAYS AND REPORTEDLY THE AREAS HAS BEEN STABLE SINCE

PORT KENT

SLIDE 6 THIS AREA ~~BUILT IN 1870~~ IS IN A SAND DEPOSIT @ MOUTH of A GLACIAL RIVER ENDING AT THE LAKE

THE RR WIDENED THE TOP OF THE ESCARPMENT IN THE 1880'S AND THE AREA WAS STABLE FOR YEARS UNTIL IN 1971. ~~WHEN~~ THE

SLIDE 7 IN 1971 CONDITIONS

SPRING CONDITIONS

Ground water flowed into the fill which eventually sloughed

RR BEGAN PLACING EMERGENCY FILL AND CONTACTED ~~US~~ THE DEPT

WHEN ARRIVED - THE EMERGENCY FILL ~~WAS~~ LOCALLY AVAILABLE WAS ~~FOUND TO BE~~ A WET SILTY SAND AND WAS flowing into the lake

WE SUGGESTED LT WT FILL

SLIDE 8 ⇒ RR HAD GONDOLAS AND STONE BALLAST

THIS PROVIDED WITH A

① Reduction IN WT of FILL which Stopped THE SAND from FLOWING

② AND A PERVIOUS DRAINAGE MEDIUM FOR THE GROUND WATER FLOW

THIS AREA HAS BEEN STABLE SINCE

IN 1975 IN THIS AREA

Slide 9 THERE WAS A SHEAR FAILURE

NOTE CIRCULAR ARC which is TYPICAL OF SOFT SILT & CLAY FOUNDATION CONDITIONS

THIS SLIDE WAS CAUSED BY

① AN INCREASING IN LAKE LEVEL - NOTED by TREE CAUSING ~~MORE~~ EROSION AT THE TOE of SLOPE coupled with weak Foundation Soils

and ② the spring conditions where the soil becomes ~~de~~saturated ~~due to~~ because of saturations

We had time to analyze this situation because the trains could operate

the analysis showed that the most economical solution to the problem was to flatten the slope and protect the toe from future erosion with Rip Rap.

Currently, We are doing 100 mile pilot study to Locate and suggest remedial treatments for soils related problems

FEW TYPICAL PROB

Slide 10 ROCK EMBANKMENTS

INTERMITTEN ~~FLOWS~~ DRAINAGE THRU THEM

CAPPED WITH CINDERS AND/OR BALLAST

Slide 11 ① WATER - RAIN REMOVES FINES FROM CINDERS/B

② INTERMITTENT CROSS FLOWS ~~REMOVES~~ REMOVES FINES FROM ROCK FILL

~~We~~ WE SUGGEST ~~ANTICIPATE~~ THAT ~~IF WE CAN~~

THE ROCK SHALL BE LOCATED AND EXCEPT THAT AN IMPERMEABLE SEAL CAN BE PLACED POSSIBLY CEMENT OR CHEMICAL

Slide 12 CLAY SHEAR FAILURE

EVENTUALLY will crack tracks

Requires borings and analysis

Can be corrected with a berm

Slide 13 EROSION ALONG LAKE MILES

Slide 14 RR corrected as we did on Highways by placing RIP RAP

Slide 15 Shows plucking fines from embankment this was what caused us to the development of graded filters behind ~~Rip Rap~~ Riprap to prevent this from occurring

—— LAST EXAMPLE I WOULD LIKE TO CONCLUDE BY SAYING

THE OBJECTIVE OF THIS PILOT STUDY IS

TO APPLY THE PRINCIPLES OF SOIL TECHNOLOGY

IN AN EFFORT TO REDUCE THE YEARLY MAINTENANCE

COSTS OF THE RAILROAD. HOWEVER THE

SUCESS OF THE SORVEY WILL BE DETERMINED

BY A COMPARISON OF THE COST OF THE

PROPOSED PERMENENT TREATMENT. AND THE YEARLY

MAINTENANCE COSTS FOR THE RR.

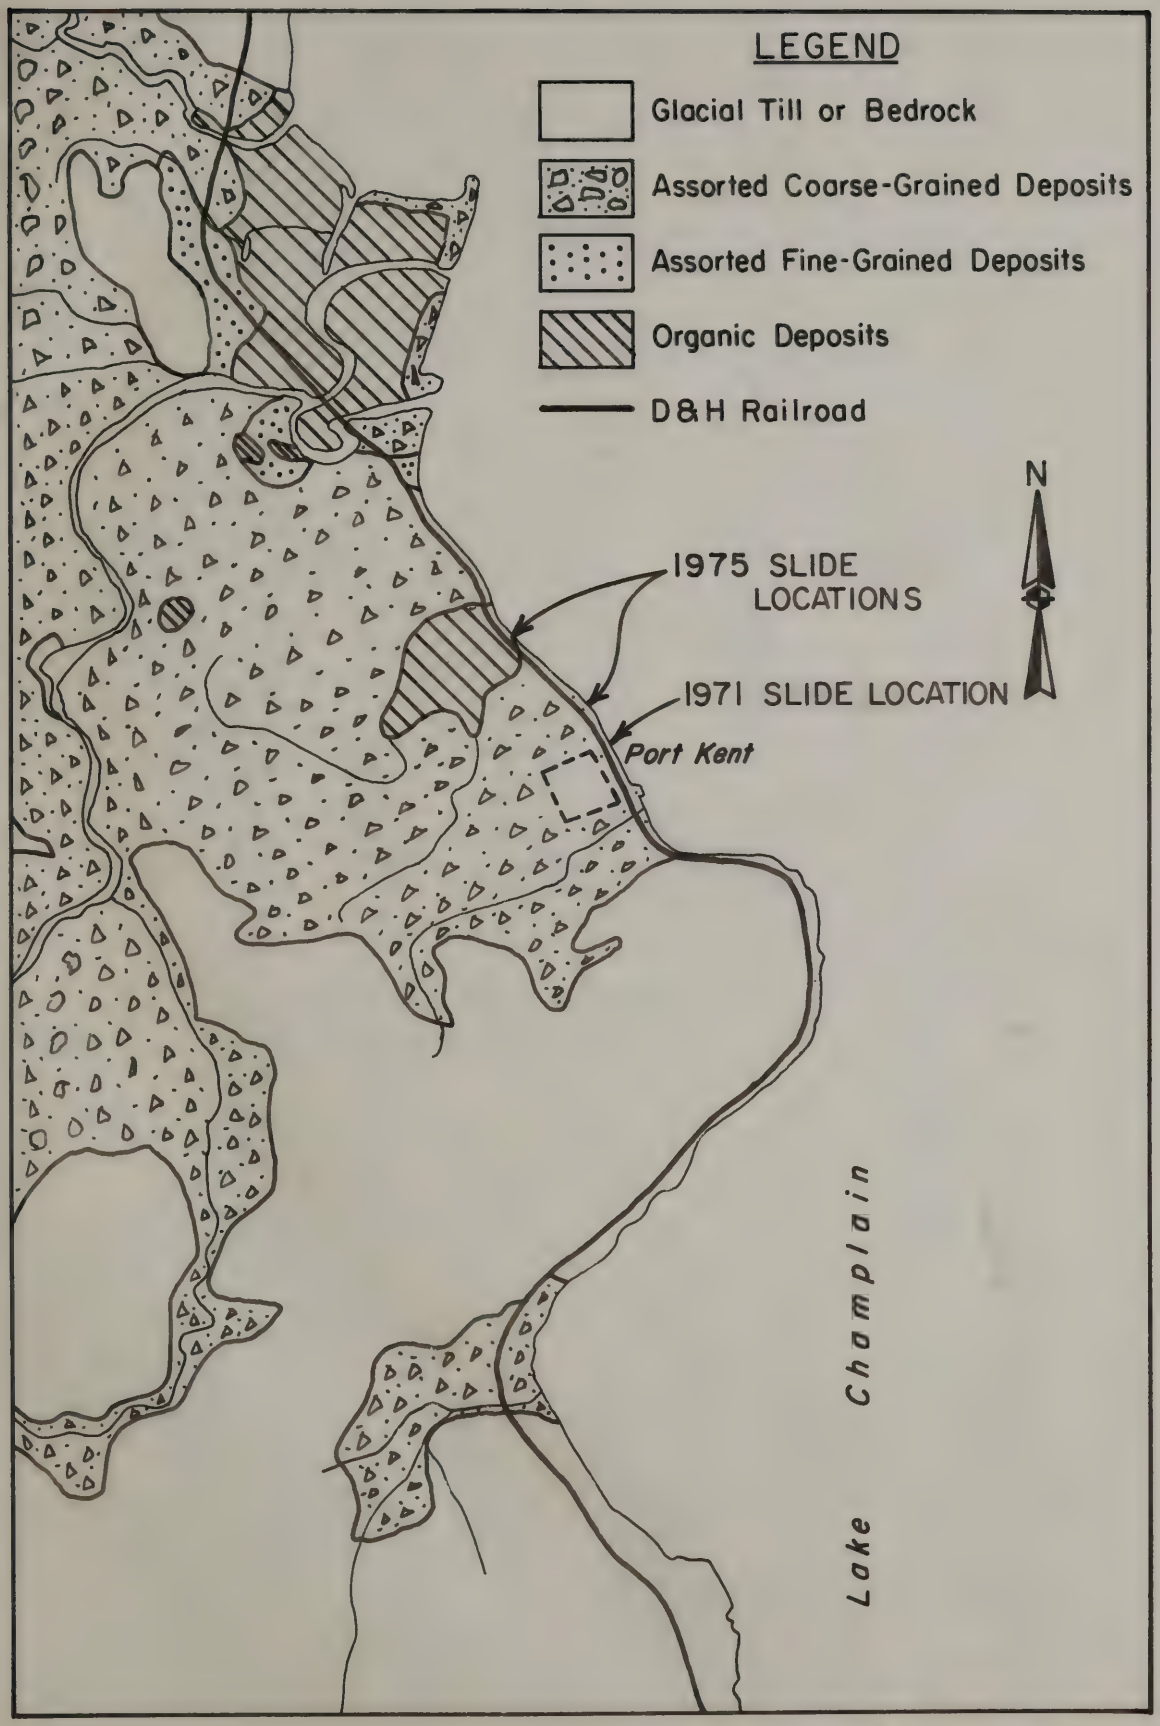
LEGEND
Glacial Till or Bedrock
Assorted Coarse-Grained Deposits
Assorted Fine-Grained Deposits
Organic Deposits
D&H Railroad
N
1975 SLIDE LOCATIONS
1971 SLIDE LOCATION
Port Kent
Lake Champlain

LEGEND
Glacial Till or Bedrock
Assorted Coarse-Grained Deposits
Assorted Fine-Grained Deposits
Organic Deposits
D&H Railroad
N
1975 SLIDE
LOCATIONS
1971 SLIDE LOCATION
Port Kent
Lake Champlain

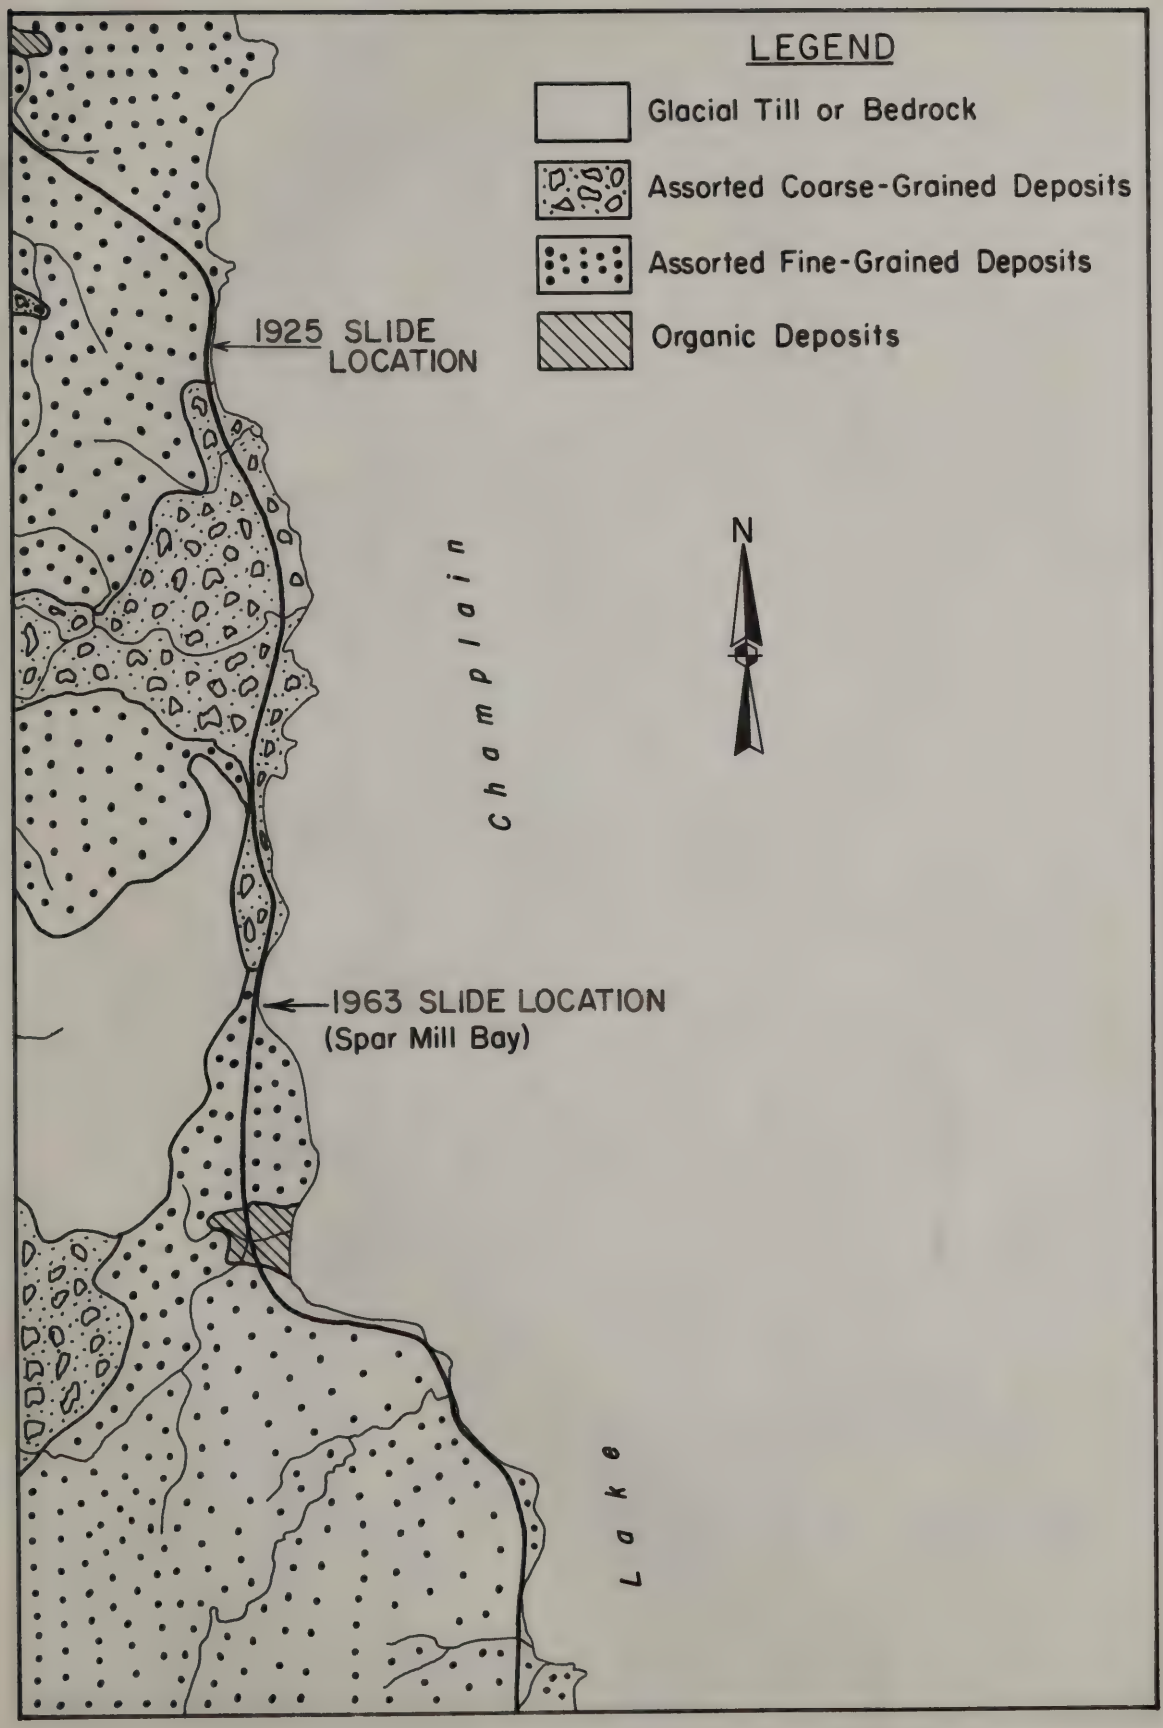
LEGEND
Glacial Till or Bedrock
Assorted Coarse-Grained Deposits
Assorted Fine-Grained Deposits
Organic Deposits
1925 SLIDE LOCATION
1963 SLIDE LOCATION
(Spar Mill Bay)
N
Champlain
Lake

LEGEND
Glacial Till or Bedrock
Assorted Coarse-Grained Deposits
Assorted Fine-Grained Deposits
Organic Deposits
1929 SLIDE LOCATION
N
1963 SLIDE LOCATION
(Spar Mill Bay)

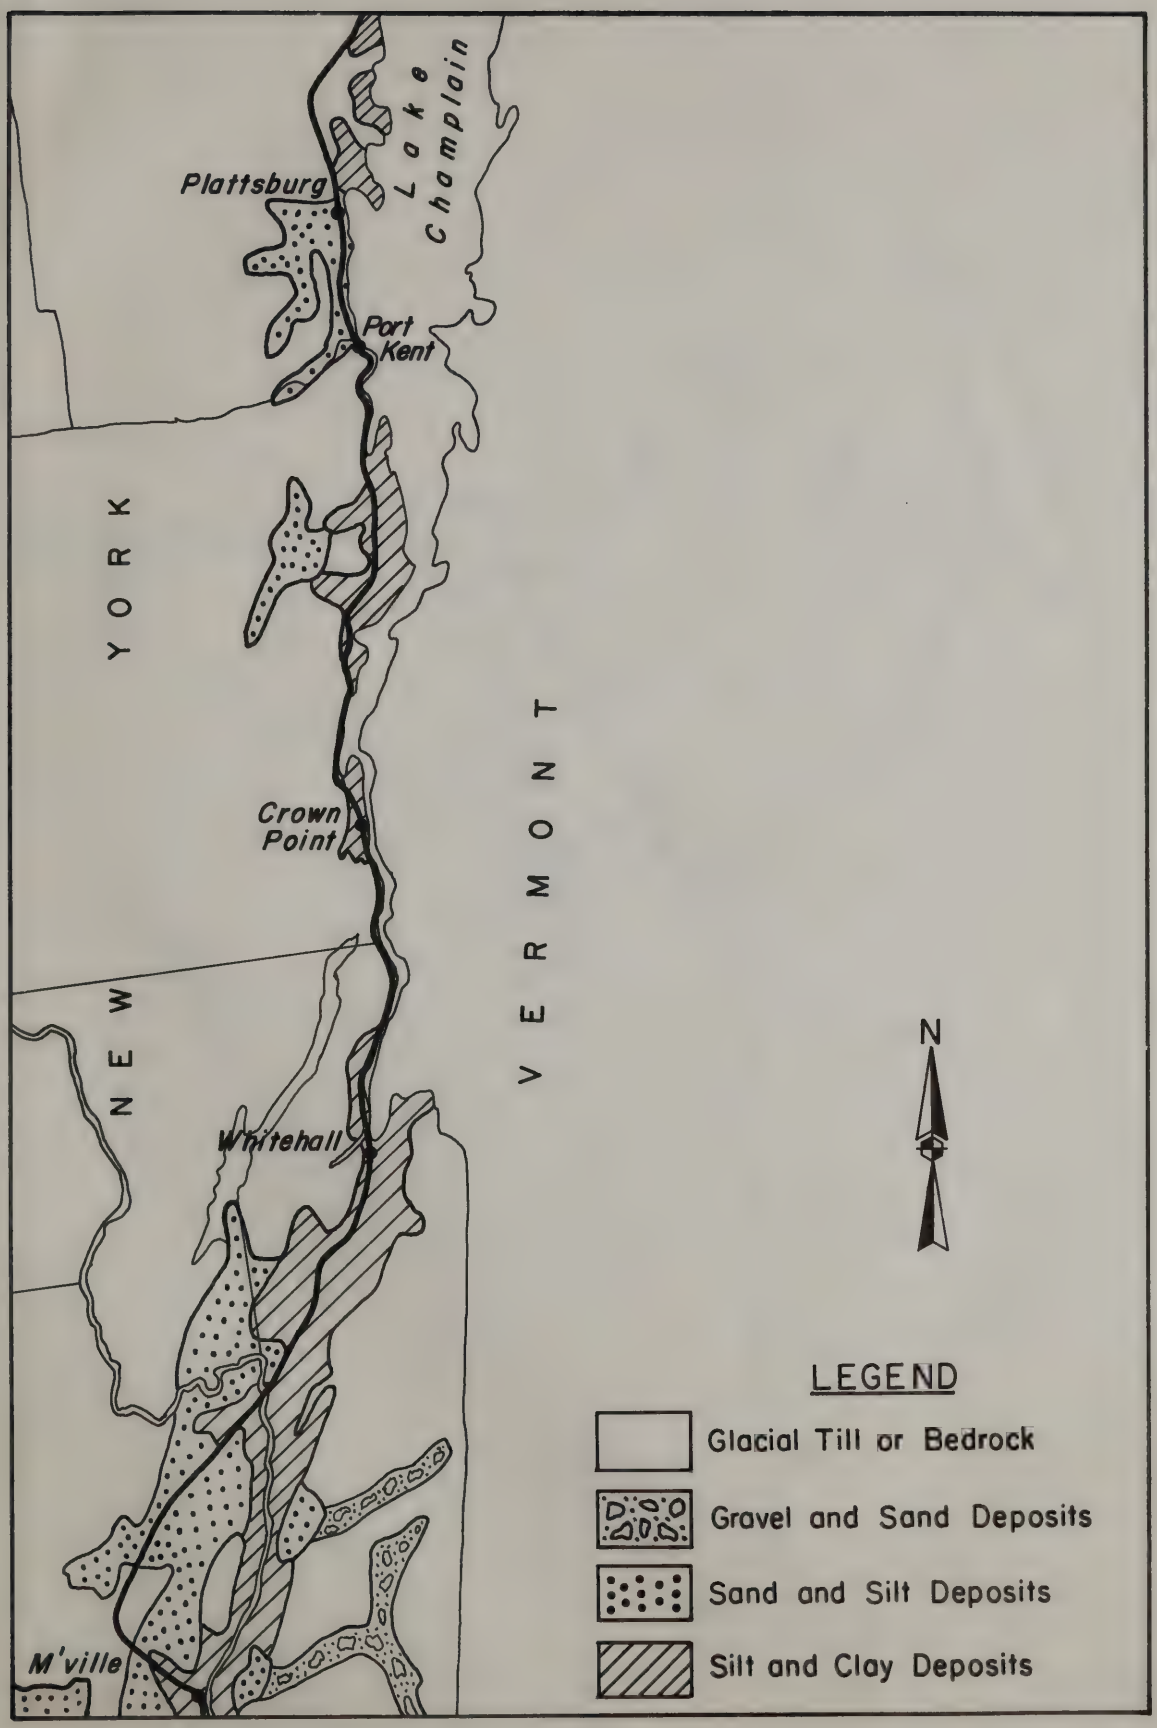
Plattsburg
Lake Champlain
Port Kent
YORK
VERMONT
Crown Point
NEW
Whitehall
M'ville
N
LEGEND
Glacial Till or Bedrock
Gravel and Sand Deposits
Sand and Silt Deposits
Silt and Clay Deposits

Champlain
Lake
Plattsburg
VERMONT
NEW YORK
Crown
Point
Peru
M'ville
N
LEGEND
Glacial Till or Bedrock
Gravel and Sand Deposits
Sand and Silt Deposits
Silt and Clay Deposits

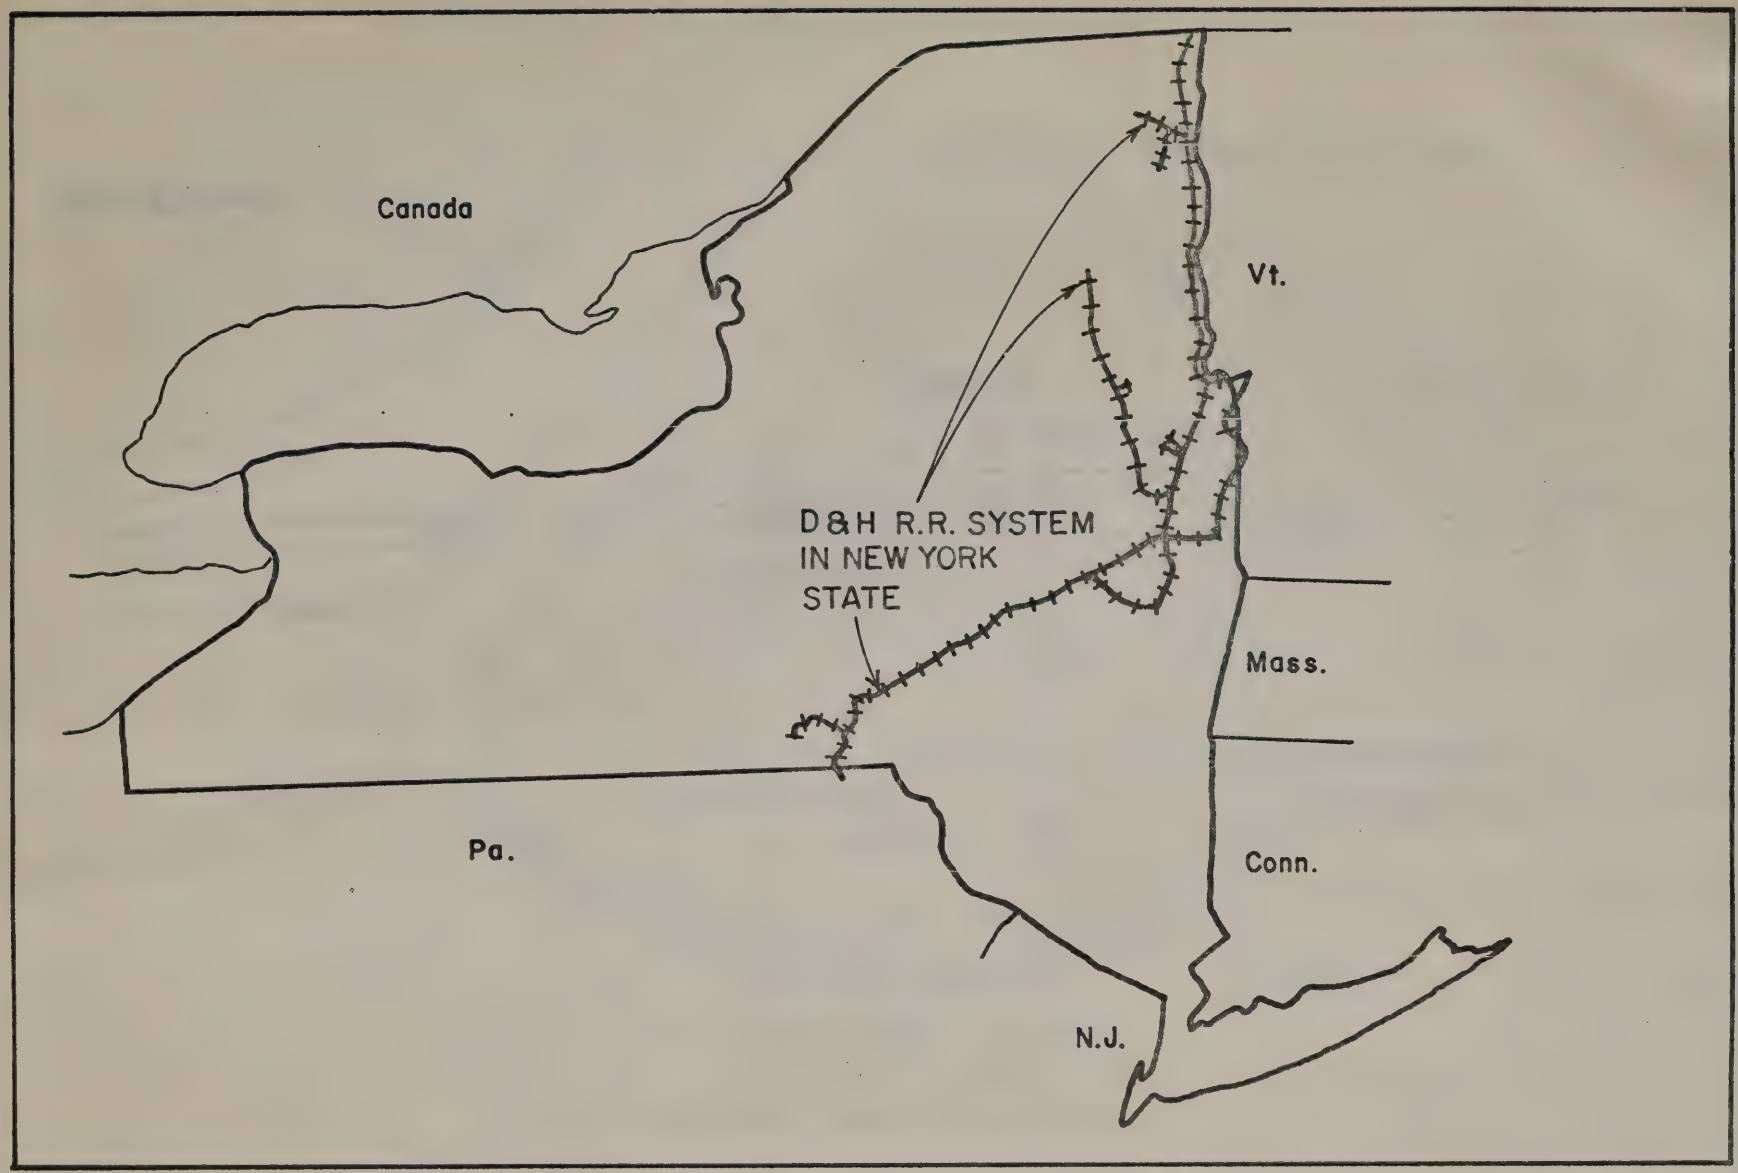
Canada
Vt.
D&H R.R. SYSTEM
IN NEW YORK
STATE
Mass.
Pa.
Conn.
N.J.

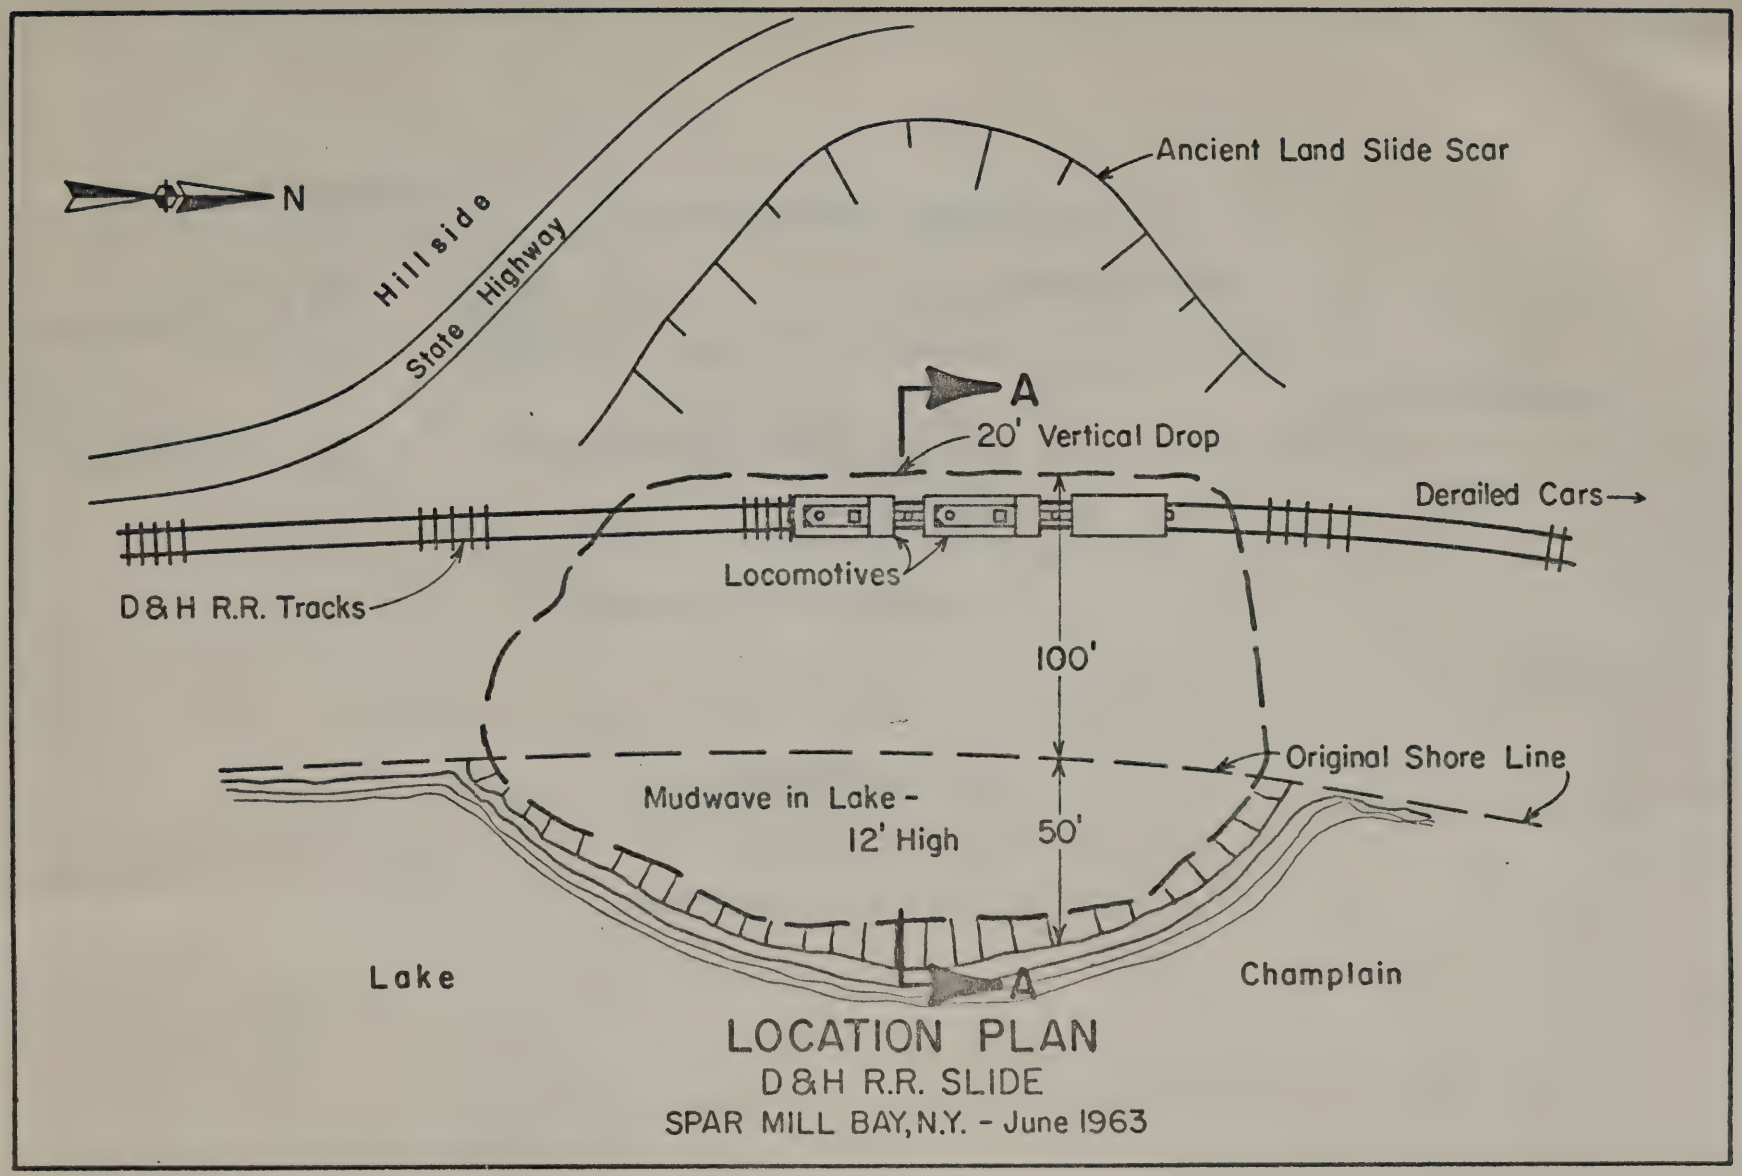

LOCATION PLAN

D&H R.R. SLIDE

SPAR MILL BAY, N.Y. - June 1963

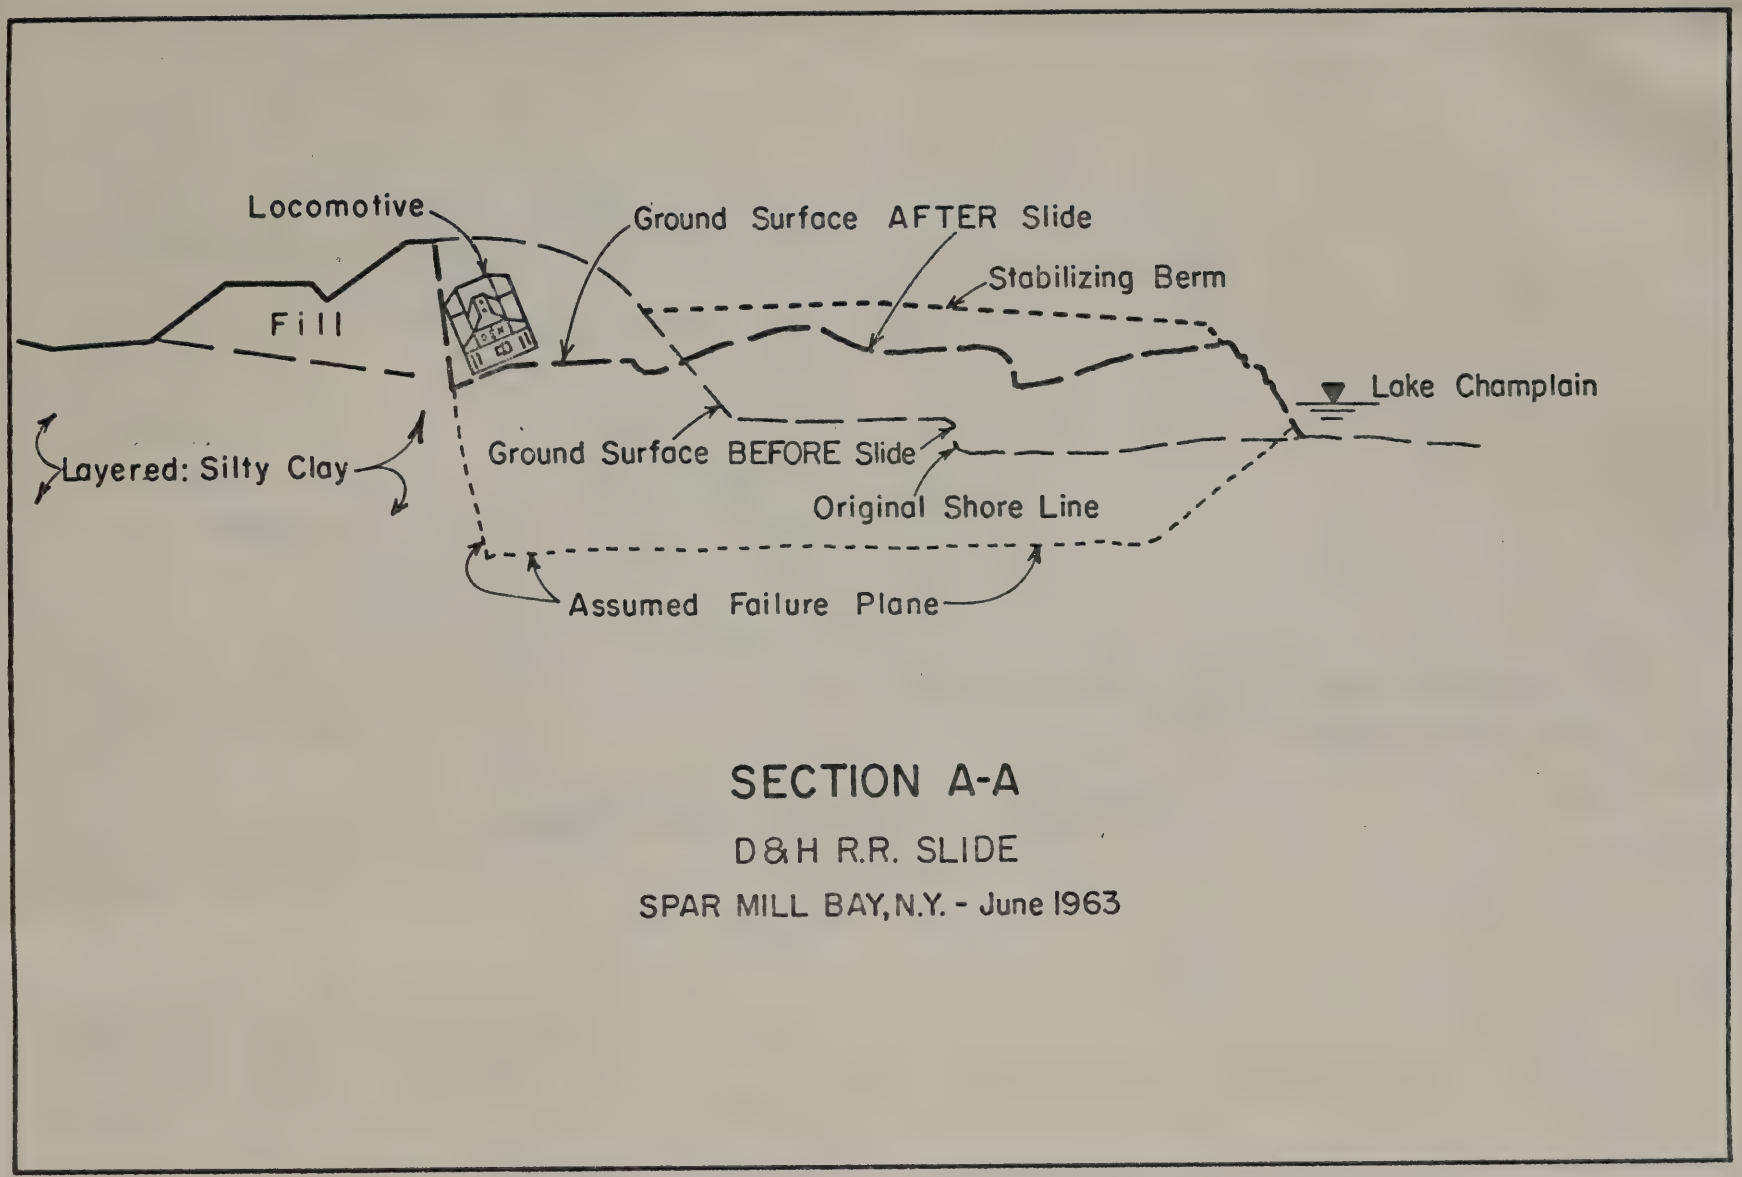

SECTION A-A

D&H R.R. SLIDE

SPAR MILL BAY, N.Y. - June 1963

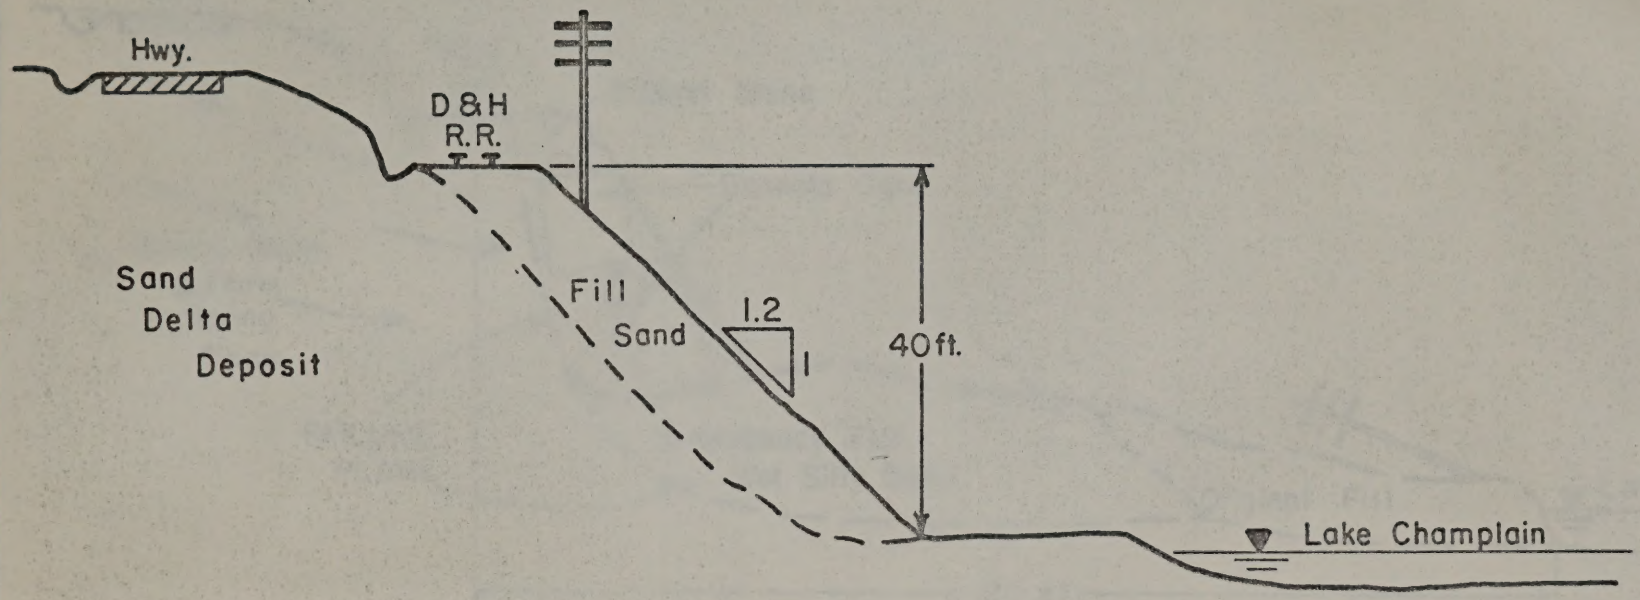

CONDITIONS BEFORE FAILURE

D&H R.R. SLIDE

PORT KENT, N.Y.-April 1971

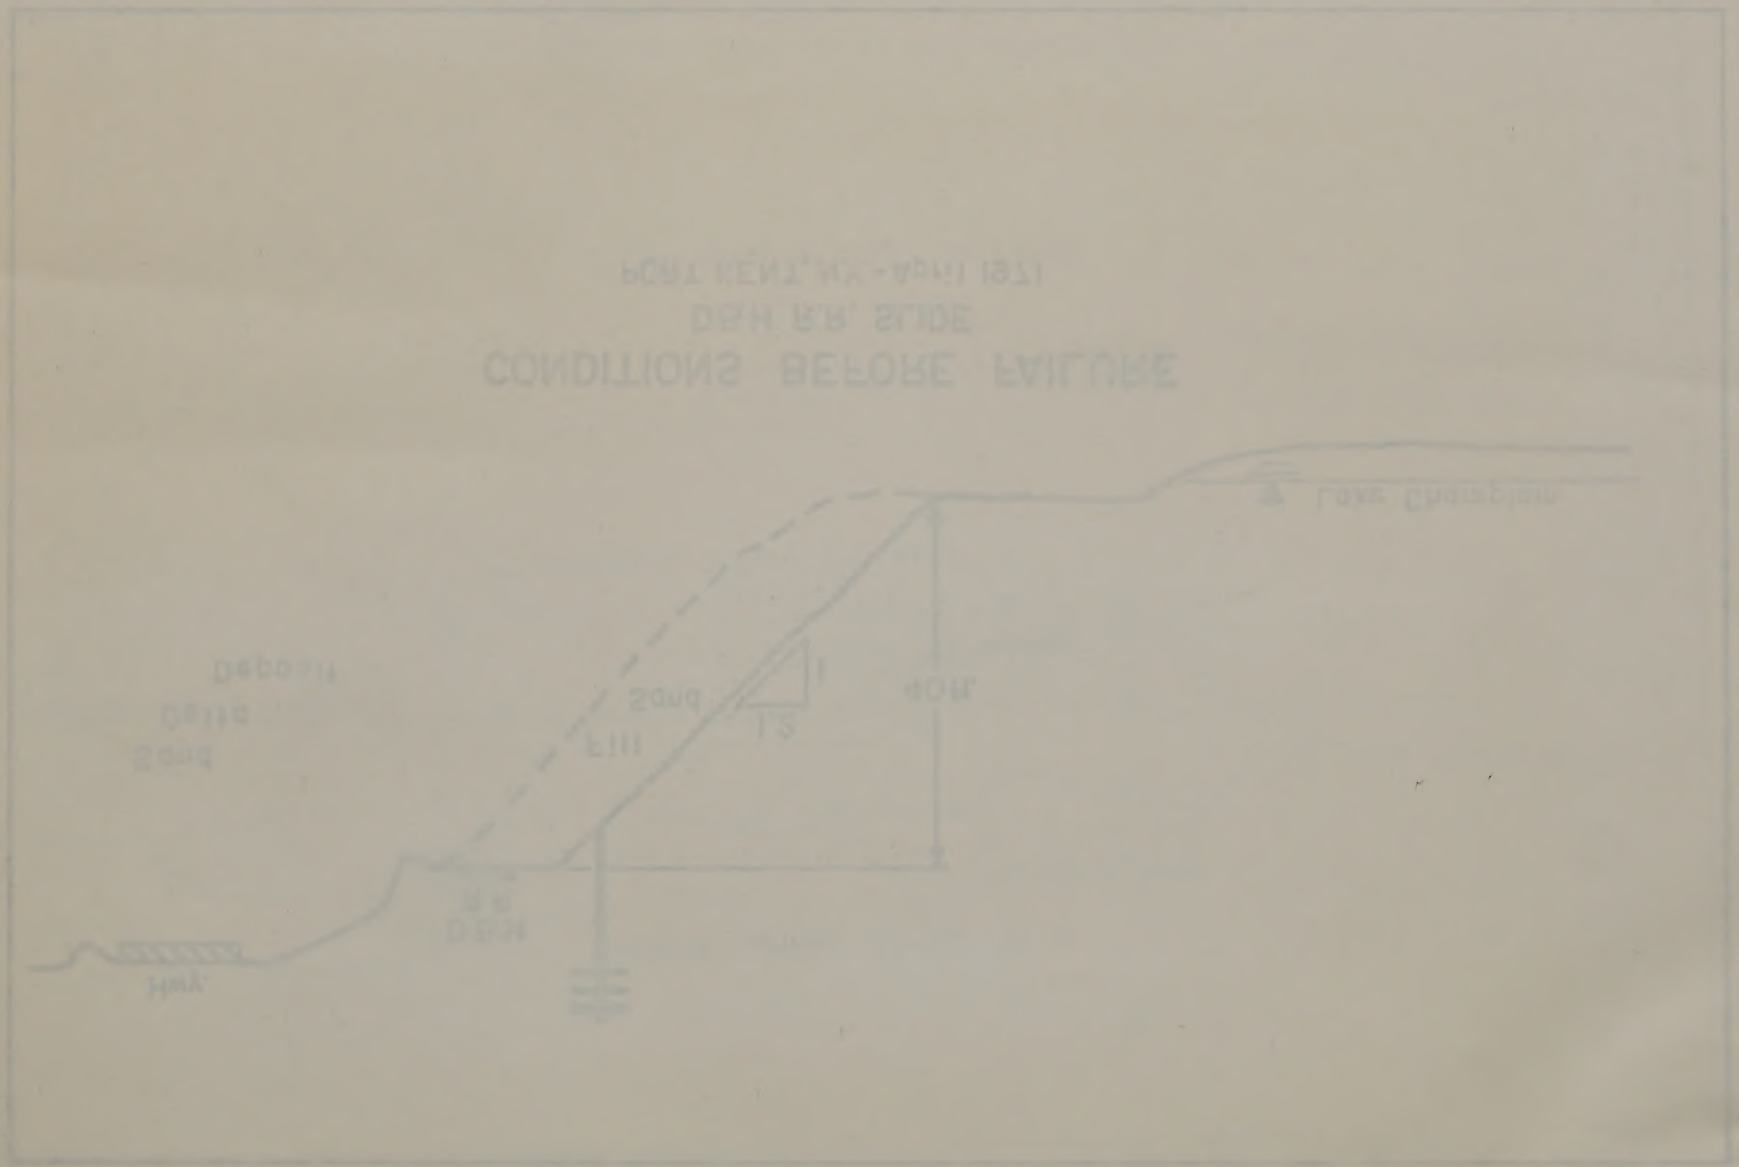

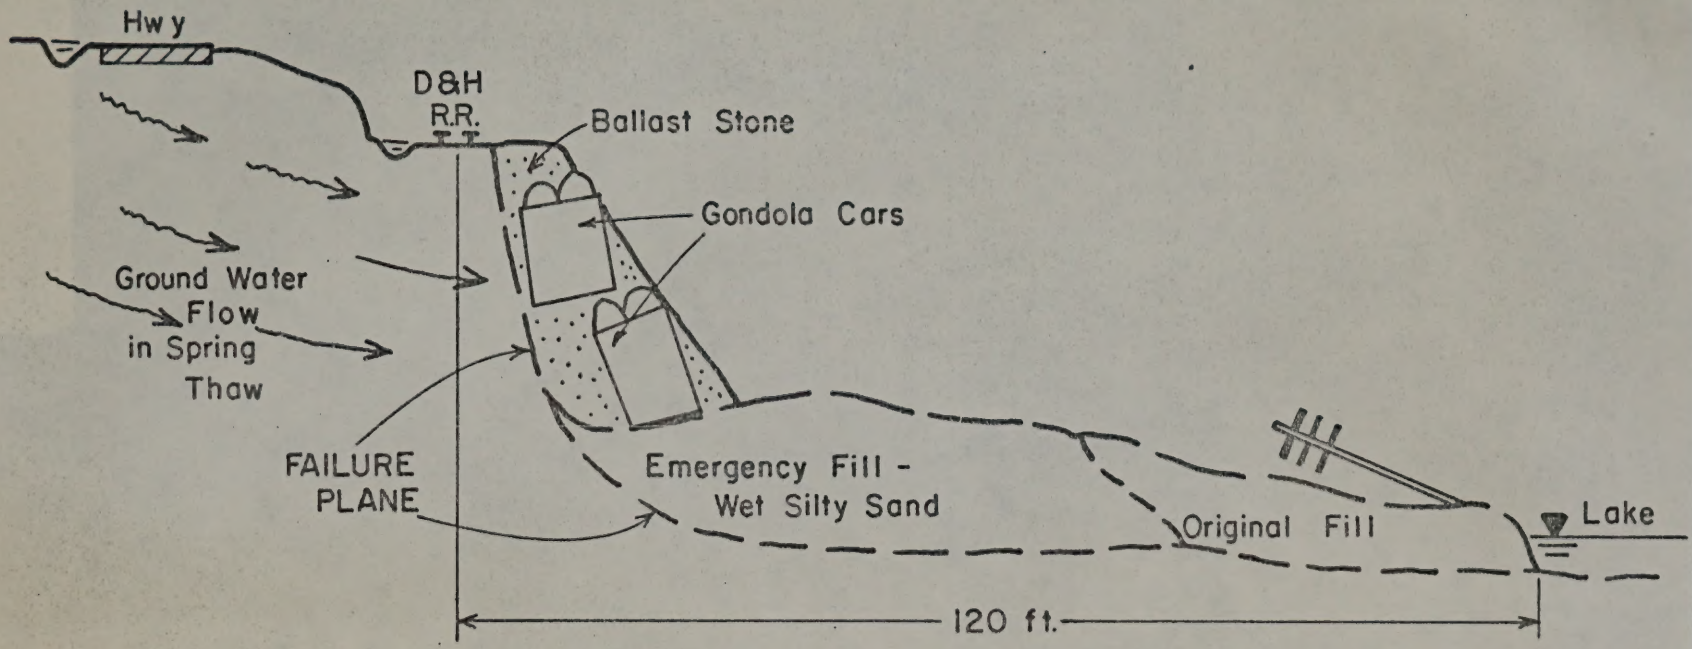

FAILURE AND REPAIR SEQUENCE

D&H R.R. SLIDE

PORT KENT, N.Y. - April 1971

00014
LRI